

# *Flextool*<sup>®</sup>

## PRODUCT CATALOGUE



VOLUME 33





**AT FLEXTOOL WE  
UNDERSTAND THAT BUYING  
EQUIPMENT CAN BE A BIG  
COMMITMENT.**

**THAT'S WHY WE'VE INTRODUCED  
TRY BEFORE YOU BUY.**



**Try Before You Buy is here to make your life, and your business decisions, easier.**

Experience selected Flextool products through our Hire partners, for two days, free of charge.\*

If you like the product and want to buy one, you can purchase a brand-new product through your local Flextool distributor.

We're committed to helping you get the job done right, whatever it takes.

**TRY BEFORE YOU BUY.  
GUARANTEED SUCCESS.**

To try before you buy, go to [flextool.com.au/try-before-you-buy](https://flextool.com.au/try-before-you-buy) to register and we will get in touch with you.



Scan to register



**AT FLEXTOOL  
WE KNOW THAT  
TIME IS MONEY.**

**THAT'S WHY WE'VE INTRODUCED  
THE FLEXTOOL PROMISE.**



**TRADE TRUSTED SINCE 1951,  
FLEXTOOL HAVE BEEN SUPPLYING  
AUSTRALIANS LIKE YOU WITH  
QUALITY EQUIPMENT AND TOOLS.  
WE ARE COMMITTED TO PROVIDING  
YOU WITH THE BEST CONSTRUCTION  
EQUIPMENT TO GET YOUR JOB DONE.**

We know that downtime on jobs costs money, so to help limit any downtime due to machinery breakdown we've introduced The Flextool Promise.\*

To put it simply, if the unexpected happens and something goes wrong with your Flextool equipment on the job, within the first 12 months of purchase, we'll help arrange and cover the cost of a loan machine for 2 days, free of charge, whilst your product is being repaired.

It's the 'road-side assist' program for your construction equipment. For complete peace of mind, make sure you register within 30 days of purchase.

With Flextool, you can start and finish your work with confidence. That's why we've been trade trusted since 1951.

The Flextool Promise. Job done.



Scan to register



**Flextool®**

**Mikasa** 

**MQ WHITEMAN**


\*Conditions apply. See [flextool.com.au](http://flextool.com.au) for details.



Flextool®

FROM SITE PREP TO SURFACE PREP,  
FLEXTOOL OFFERS A COMPLETE  
RANGE OF QUALITY PROFESSIONAL  
CONCRETE AND CONSTRUCTION  
EQUIPMENT.

|                                                                                       |                                   |     |
|---------------------------------------------------------------------------------------|-----------------------------------|-----|
|    | <b>SOIL COMPACTION</b>            | 8   |
| Tamping rammers, forward and reversible plate compactors                              |                                   |     |
|    | <b>MINI DUMPERS</b>               | 26  |
| Battery and petrol powered models                                                     |                                   |     |
|    | <b>DRIVE UNITS</b>                | 30  |
| Petrol and diesel models                                                              |                                   |     |
|    | <b>PUMPS</b>                      | 32  |
| Flexshaft and electric submersible pumps, lay flat hose and extension flexshafts      |                                   |     |
|    | <b>CONCRETE VIBRATORS</b>         | 38  |
| Flexshaft concrete vibrators, PortaVibe and PowerVibe                                 |                                   |     |
|    | <b>CONCRETE POWER SCREEDING</b>   | 46  |
| PortaScreed, double beam vibratory screed and truss screed                            |                                   |     |
|    | <b>CONCRETE POWER FINISHING</b>   | 54  |
| Walk-behind and ride-on power trowels, trowel blades and pan floats                   |                                   |     |
|    | <b>HAND TOOLS</b>                 | 78  |
| Concrete and masonry                                                                  |                                   |     |
|    | <b>DIAMOND CUTTING AND SAWING</b> | 103 |
| Saws and diamond blades                                                               |                                   |     |
|   | <b>SPRAYERS</b>                   | 114 |
| Industrial sprayer and chemical spraying systems                                      |                                   |     |
|  | <b>PRESSURE CLEANERS</b>          | 120 |
| Professional multi-trade equipment and accessories                                    |                                   |     |
|  | <b>SURFACE PREPARATION</b>        | 124 |
| Concrete grinders, dust collectors, scarifier and diamond grinding consumables        |                                   |     |

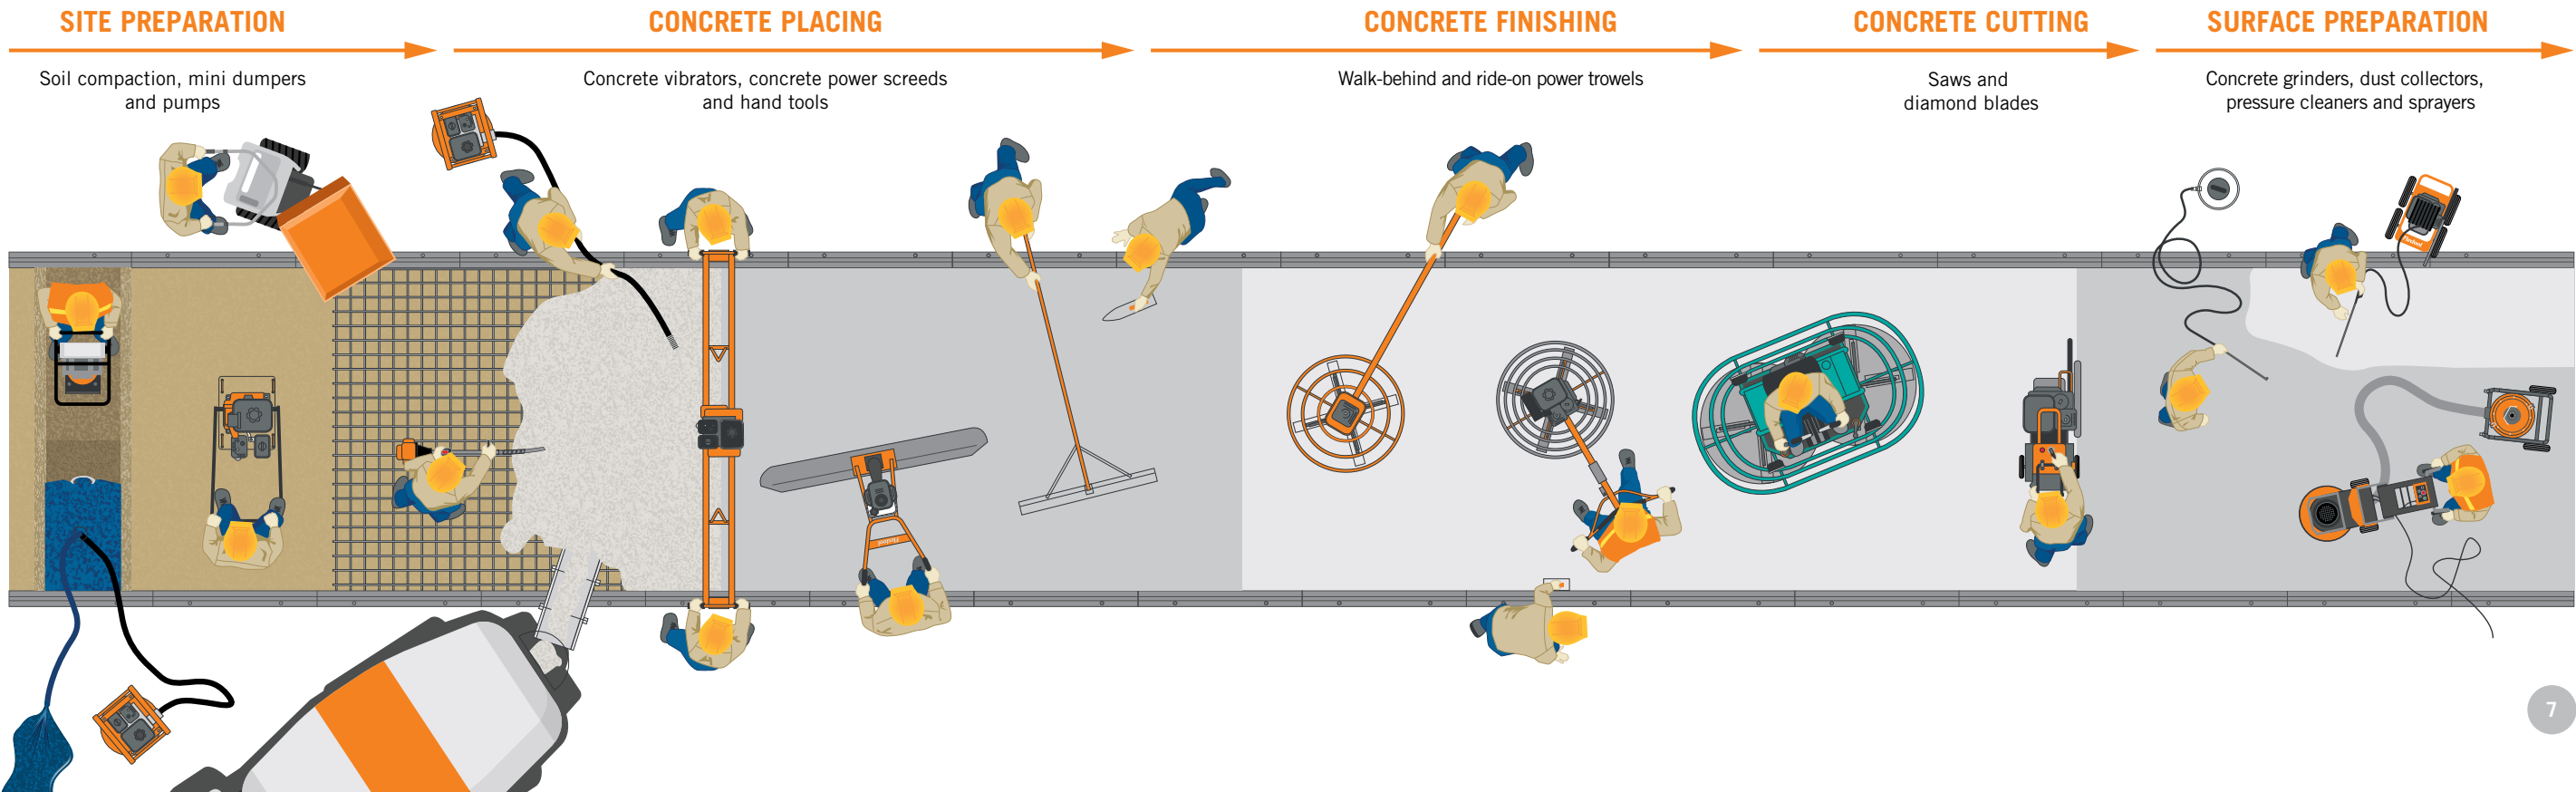



Flextool PortaPac®

Suitable for all trades, the Flextool PortaPac FCP-48 is designed for ultimate manoeuvrability. Incorporating a narrow base plate, the PortaPac can complete soil compaction works in tight and restricted spaces where larger plate compactors cannot fit. In addition, the built-in wheel kit eliminates the need to manually lift the PortaPac while around the job site. Portability is optimised with a central lifting point for safe and easy lifting, plus folding handle for straightforward transportation.

This product is eligible for the Flextool Promise.



| Model  | Operating Weight (kg) | Plate Size (w x l) (mm) | Centrifugal Force Max (kN) | Vibration Frequency (vpm) | Max Travel Speed* (m/min) | Max Gradeability (%) | Max Compacted Area (m²/h) | Lifting Hook | Engine Make & Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|--------|-----------------------|-------------------------|----------------------------|---------------------------|---------------------------|----------------------|---------------------------|--------------|---------------------|----------------------|-----------|---------------|
| FCP-48 | 48                    | 310 x 430               | 8.5                        | 5140                      | 22                        | 32                   | 410                       | Yes          | Honda GX100         | 3                    |           | FT201870-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.

Flextool Forward Plate Compactor

The Flextool Forward Plate Compactor FCP-87B is suitable for a wide range of compaction applications. Engineered with a foldover handle, heavy-duty handle mounts and Honda 4-stroke engine, this unit is highly portable, easily manoeuvrable and delivers excellent compaction results.

This product is eligible for the Flextool Promise.



| Model   | Operating Weight (kg) | Plate Size (w x l) (mm) | Centrifugal Force Max (kN) | Vibration Frequency (vpm) | Max Travel Speed* (m/min) | Max Gradeability (%) | Max Compacted Area (m²/h) | Lifting Hook | Engine Make & Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|---------|-----------------------|-------------------------|----------------------------|---------------------------|---------------------------|----------------------|---------------------------|--------------|---------------------|----------------------|-----------|---------------|
| FCP-87B | 87                    | 460 x 610               | 19.8                       | 7000                      | 26                        | 35                   | 717                       | Yes          | Honda GX160         | 5.5                  |           | FT201806-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.



# SOIL COMPACTION

**3 YEAR WARRANTY**

HIT HARDER  
LAST LONGER  
BUILT STRONGER



Exclusive to Flextool, Mikasa soil compaction equipment is recognised as the industry standard for compacting granular soils and asphalt. The range includes both petrol and electric power packed Tamping Rammers, Forward and Reversible Plate Compactors.

Founded in Japan in 1937, Mikasa has been exported worldwide since 1968. Designed and manufactured in South East Asia, these premium soil compactors are built to last and all products are covered by a 3 year product warranty and the Flextool Promise.

**Tamping Rammers**  
For use in confined spaces such as trenches and deep excavations for compacting soil and backfill

**Reversible Plate Compactors**  
Used for compacting larger areas and also trenches with its forward and reverse directional capabilities

**Forward Plate Compactors**  
Used for compacting thin layers such as road base and asphalt





# Mikasa Tamping Rammers

Mikasa Tamping Rammers are perfectly balanced to deliver hard hitting compaction while ensuring optimised operator comfort and product transportation. Engineered with a Vibration Absorbing System, integrated handle roller and Honda 4-stroke engine, the Mikasa Tamping Rammers offer superior build quality and excellent performance.

This product is eligible for the Flextool Promise.

**Cyclonic air filtration system**

For superior air filtration to lengthen service internals and improve engine protection

**Handle roller**

- Easy loading into vehicles
- Unit can lie down to 90° during transportation

**Vibration Absorbing System**

Low vibration handles for reduced hand and arm vibration transfer to the operator

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Fully integrated control switch**

Controls on/off switch, fuel tap and engine throttle

**Engine guard**

Fully protected engine to eliminate damage to critical engine components

**Honda GX100 engine**

Provides hassle free operation and low engine emissions



MTX-60E

POWERED by

**HONDA**

12

## MIKASA TAMPING RAMMERS (PETROL/DIESEL)



MTR-40H

Shoe Size (w x l)  
100 mm x 270 mm



MTX-60E

Shoe Size (w x l)  
265 mm x 340 mm



MTX-70E

Shoe Size (w x l)  
285 mm x 340 mm



MTX-85DYC

Shoe Size (w x l)  
285 mm x 340 mm

| Model     | Operating Weight (kg) | Jumping Stroke (mm) | Impact Rate (blows/m) | Max Impact Force (kN) | Average Travel Speed* (m/min) | Compaction Depth* (cm) | Engine Make & Model | Max Rated Power (hp) | Fuel Type | Average HAV (m/s²) | Fuel Tank Capacity (L) | Wheel Kit | Product Code  |
|-----------|-----------------------|---------------------|-----------------------|-----------------------|-------------------------------|------------------------|---------------------|----------------------|-----------|--------------------|------------------------|-----------|---------------|
| MTR-40H   | 46                    | 40-55               | 644-695               | 5.4                   | 10-12                         | 20-30                  | Honda GX100         | 3                    | P         | 17.9               | 2                      | No        | FT201691-UNIT |
| MTX-60E   | 64                    | 50-80               | 644-695               | 13.6                  | 10-12                         | 50-85                  | Honda GX100         | 3                    | P         | 5.2                | 2.5                    | Option    | FT2TX60E-UNIT |
| MTX-70E   | 75                    | 50-80               | 644-695               | 14.9                  | 10-12                         | 45-70                  | Honda GX100         | 3                    | P         | 5.6                | 3                      | Option    | FT2MTX70-UNIT |
| MTX-85DYC | 93                    | 50-80               | 656-698               | 15.7                  | 10-12                         | 50-85                  | Yanmar L48          | 4.7                  | D         | 18.5               | 3.3                    | Option    | FT285DYC-UNIT |

\* Travel speeds and compaction depths vary based on different soil conditions. Specifications published are based on average performance results.

## REPLACEMENT SHOE

| Model              | Product Code  |
|--------------------|---------------|
| MTR-40H            | NPS71383-UNIT |
| MTX-60E            | NPS70638-UNIT |
| MTX-70E, MTX-85DYC | NPS70430-UNIT |

## TRENCHING SHOE (115 mm wide x 330 mm high)

|                    |               |
|--------------------|---------------|
| MTX-60E            | NPS51907-UNIT |
| MTX-70E, MTX-85DYC | NPS51919-UNIT |

## TRENCHING SHOE (165 mm wide x 330 mm high)

|                    |               |
|--------------------|---------------|
| MTX-70E, MTX-85DYC | NPS51931-UNIT |
|--------------------|---------------|

## WHEEL KIT

| Product Code  | Operating Weight (kg) | Suits              | Wheel Diameter (mm) | Wheel Type               |
|---------------|-----------------------|--------------------|---------------------|--------------------------|
| FT201692-UNIT | 11                    | MTX Series Rammers | 260                 | Solid flat free urethane |

13

Mikasa Tamping Rammer (Electric)

Mikasa Tamping Rammers are perfectly balanced to deliver hard hitting compaction while ensuring optimised operator comfort. Engineered with a Vibration Absorbing System, motor guard and integrated control switch, the Mikasa Tamping Rammers offer superior build quality and excellent performance. Mikasa's battery powered compaction equipment range features a Honda eGX-Series electric motor which is powered by an interchangeable lithium-ion battery pack, capable of rapidly charging to 80% capacity in only 60 minutes. These zero emission and reduced noise level machines are a great alternative to the engine powered equivalents, especially when operating in noise and fume restricted environments.

This product is eligible for the Flextool Promise.

Lifting hook

Central lifting hook for easy and safe onsite handling

Honda eGX battery

- Quick charging 72 volt lithium-ion battery for maximized operational productivity
- Reaches 80% charge in 60 minutes, fully charged in 90 minutes
- Interchangeable with other Mikasa battery powered soil compaction equipment

Honda eGX motor

- High-efficiency, high-power 3 phase brushless DC motor for maximum performance and reliability
- Zero operating emissions
- Low noise offers expanded work hours and usage in noise restricted areas
- Low motor vibration reduces operator fatigue, providing a more comfortable work environment

Variable speed

Variable speed motor allows for quick and easy selection of three operating speeds to suit most job site requirements

Motor guard

Fully protected motor to eliminate damage to critical motor components

Vibration Absorbing System

Low vibration handles for reduced hand and arm vibration transfer to the operator



EQUIPMENT (BODY ONLY)



BATTERY AND CHARGER



MIKASA TAMPING RAMMER (ELECTRIC)



| Model  | Operating Weight (kg) | Shoe Size w x l (mm) | Jumping Stroke (mm) | Impact Rate (blows/m) | Max Impact Force (kN) | Average Travel Speed* (m/min) | Compaction Depth* (cm) | Motor Make & Model | Rated Power Cont / Max (kW) | Average HAV (m/s²) | Run time (min) | Product Code  |
|--------|-----------------------|----------------------|---------------------|-----------------------|-----------------------|-------------------------------|------------------------|--------------------|-----------------------------|--------------------|----------------|---------------|
| MT-e55 | 75                    | 265 x 340            | 30-70               | 574-689               | 10.8                  | 10.6                          | 40-60                  | Honda GXE2.0S      | 1.6 / 2.4                   | 3.6                | up to 30 min   | FT272787-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.  
\*\* 3 year warranty covers MT-e55 body only. Honda eGX battery and charger are covered by a separate 2 year warranty.

HONDA EGX BATTERY (sold separately)

| Battery Type | Battery Capacity (Ah) | Energy Content (Wh) | Battery Weight (kg) | Voltage (V) | Charge Time                                            | Product Code  |
|--------------|-----------------------|---------------------|---------------------|-------------|--------------------------------------------------------|---------------|
| Li-ion       | 10                    | 748                 | 6.4                 | 72          | 80% charge in 60 minutes<br>100% charged in 90 minutes | FT272790-UNIT |




HONDA EGX CHARGER (sold separately)

| Charger Weight (kg) | Voltage (V/A) | Product Code  |
|---------------------|---------------|---------------|
| 11.0                | 240 / 10      | FT272791-UNIT |



REPLACEMENT SHOE

| Model  | Product Code  |
|--------|---------------|
| MT-e55 | NPS70638-UNIT |



Replacement shoe

TRENCHING SHOE (115 mm wide x 330 mm high)

| Model  | Product Code  |
|--------|---------------|
| MT-e55 | NPS51907-UNIT |



Trenching shoe





# Mikasa Forward Plate Compactors

Mikasa Forward Plate Compactors set the standard for the compaction of sub-bases and asphalt. Mikasa Forward Plate Compactors offer superior build quality and excellent performance. They are also highly portable, easily manoeuvrable and deliver excellent compaction results.

This product is eligible for the Flextool Promise.

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Honda GX120 engine**

Provides hassle free operation and low engine emissions

**Optional water tank**

Clip-on water tank for suppression of dust and asphalt works

**Folding handle**

Allows for transport in confined spaced

**Transport wheel kit**

Foldaway wheel kit for easy and safe onsite manoeuvrability

**Sealed clutch and belt guard**

Protects against the ingress of dust and other unwanted materials that can prematurely wear out critical clutch components and V-belt



MVC-F60H

**POWERED by HONDA**



## MIKASA FORWARD PLATE COMPACTORS (PETROL/DIESEL)

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |
| <b>MVC-40H</b>                                                                      | <b>MVC-F60H</b>                                                                     | <b>MVC-F80H</b>                                                                     | <b>MVC-T90H</b>                                                                     | <b>MVC-T100D</b>                                                                    |
| <b>Plate size (w x l)</b><br>295 mm x 420 mm                                        | <b>Plate size (w x l)</b><br>350 mm x 510 mm                                        | <b>Plate size (w x l)</b><br>450 mm x 570 mm                                        | <b>Plate size (w x l)</b><br>500 mm x 525 mm                                        | <b>Plate size (w x l)</b><br>500 mm x 525 mm                                        |

| Model     | Operating Weight (kg) | Vibration Frequency (vpm/Hz) | Centrifugal Force (Max) (kN) | Max Travel Speed (m/min) | Max Gradeability (%) | Max Compacted Area (m²/h) | Engine Make & Model | Max Rated Power (hp) | Fuel Type | Average HAV (m/s²) | Lifting Hook | Wheel Kit | Water Tank | Product Code  |
|-----------|-----------------------|------------------------------|------------------------------|--------------------------|----------------------|---------------------------|---------------------|----------------------|-----------|--------------------|--------------|-----------|------------|---------------|
| MVC-40H   | 50                    | 6,200 103                    | 7.2                          | 25                       | 35                   | 442.5                     | Honda GX100         | 3.0                  | P         | 5.6                | Yes          | Yes       | Option     | FT201689-UNIT |
| MVC-F60H  | 73                    | 5,600 93                     | 10.1                         | 25                       | 35                   | 525                       | Honda GX120         | 4.0                  | P         | 7.3                | Yes          | Yes       | Option     | FT272785-UNIT |
| MVC-F80H  | 81                    | 5,600 93                     | 13.7                         | 25                       | 35                   | 675                       | Honda GX160         | 5.5                  | P         | 6.7                | Yes          | Yes       | Option     | FT272786-UNIT |
| MVC-T90H  | 91                    | 6,000 100                    | 15                           | 25                       | 35                   | 750                       | Honda GX160         | 5.5                  | P         | 4.7                | Yes          | Option    | Yes        | FT2CT90H-UNIT |
| MVC-T100D | 103                   | 6,000 100                    | 15                           | 25                       | 35                   | 750                       | Yanmar L48          | 4.7                  | D         | 5.4                | Yes          | Option    | Yes        | FT2T100D-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.

## WHEEL KIT

| Model     | Serial No.                        | Product Code  |
|-----------|-----------------------------------|---------------|
| MVC-T90H  | Y1066 - A1616 and C3807 - Current | FT231599-UNIT |
|           | A2583 - C3257                     | FT231594-UNIT |
| MVC-T100D | All                               | FT231599-UNIT |

## WATER TANK

| Model    | Product Code  |
|----------|---------------|
| MVC-40H  | NPS05700-UNIT |
| MVC-F60H | NPS05148-UNIT |
| MVC-F80H | NPS05149-UNIT |



Optional water tank



Folding handle



Wheel kit



# Mikasa Forward Plate Compactor (Electric)

Mikasa Forward Plate Compactors set the standard for the compaction of sub-bases and asphalt. Mikasa Forward Plate Compactors offer superior build quality and excellent performance. They are also highly portable, easily manoeuvrable and deliver excellent compaction results. Mikasa's battery powered compaction equipment range features a Honda eGX-Series electric motor which is powered by an interchangeable lithium-ion battery pack, capable of rapidly charging to 80% capacity in only 60 minutes. These zero emission and reduced noise level machines are a great alternative to the engine powered equivalents, especially when operating in noise and fume restricted environments.

This product is eligible for the Flextool Promise.

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Honda eGX battery**

- Quick charging 72 volt lithium-ion battery for maximized operational productivity
- Reaches 80% charge in 60 minutes, fully charged in 90 minutes
- Interchangeable with other Mikasa battery powered soil compaction equipment

**Honda eGX motor**

- High-efficiency, high-power 3 phase brushless DC motor for maximum performance and reliability
- Zero operating emissions
- Low noise offers expanded work hours and usage in noise restricted areas
- Low motor vibration reduces operator fatigue, providing a more comfortable work environment

**Optional water tank**

Clip-on water tank for suppression of dust and asphalt works

**Vibration Absorbing System**

Low vibration handle for reduced hand and arm vibration transfer to the operator

**Control panel**

Easy to access start and stop switch and LED indicators

**Sealed clutch and belt guard**

Protects against the ingress of dust and other unwanted materials that can prematurely wear out critical clutch components and V-belt

**3 YEAR WARRANTY**

EQUIPMENT (BODY ONLY)

**2 YEAR WARRANTY**

BATTERY AND CHARGER

## MIKASA FORWARD PLATE COMPACTOR (ELECTRIC)

| Model   | Operating Weight (kg) | Plate Size w x l (mm) | Vibration Frequency (vpm) | Vibration Frequency (Hz) | Max Centrifugal Force (kN) | Max Travel Speed* (m/min) | Max Gradeability (%) | Max Compacted Area (m²/h) | Lifting Hook | Wheel Kit | Water Tank | Motor Make & Model | Rated Power Cont / Max (kW) | Average HAV (m/s²) | Run time (min) | Product Code  |
|---------|-----------------------|-----------------------|---------------------------|--------------------------|----------------------------|---------------------------|----------------------|---------------------------|--------------|-----------|------------|--------------------|-----------------------------|--------------------|----------------|---------------|
| MVC-e60 | 80                    | 350 x 570             | 5,600                     | 93                       | 10.1                       | 25                        | 35                   | 525                       | Yes          | No        | Option     | Honda GXE2.0H      | 1.6 / 2.4                   | 2.4                | up to 35       | FT272788-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.  
\*\* 3 year warranty covers MT-e55 body only. Honda eGX battery and charger are covered by a separate 2 year warranty.

### HONDA EGX BATTERY (sold separately)

| Battery Type | Battery Capacity (Ah) | Energy Content (Wh) | Battery Weight (kg) | Voltage (V) | Charge Time                                            | Product Code  |
|--------------|-----------------------|---------------------|---------------------|-------------|--------------------------------------------------------|---------------|
| Li-ion       | 10                    | 748                 | 6.4                 | 72          | 80% charge in 60 minutes<br>100% charged in 90 minutes | FT272790-UNIT |

### HONDA EGX CHARGER (sold separately)

| Charger Weight (kg) | Voltage (V/A) | Product Code  |
|---------------------|---------------|---------------|
| 11.0                | 240 / 10      | FT272791-UNIT |

### WATER TANK

| Model   | Product Code  |
|---------|---------------|
| MVC-e60 | NPS05148-UNIT |

Optional water tank

18

19





# Mikasa Reversible Plate Compactors

Mikasa Reversible Plate Compactors set the standard for efficient compaction of sand, gravel and cohesive soils in trenches and large construction projects. They offer high-compaction capacity, superior travel speeds and feature fully hydraulic direction control for easy direction change. They are ideally suited for civil construction works, drainage contractors and the rental industry.

This product is eligible for the Flextool Promise.

Engine hour meter and tachometer

- Efficiently manage service intervals
- Monitor rpm for optimum compaction performance

Lifting hook

Central lifting hook for easy and safe onsite handling

Honda GX270 engine

Provides hassle free operation and low engine emissions

Full engine protection frame

- Robust frame provides superior protection against engine damage
- Hinge design simplifies maintenance and offers convenient access to all serviceable components

Forward/reverse control lever

With built-in actuator for seamless and smooth transition between both forward and reverse motions

Cyclonic air filtration system

For superior air filtration to lengthen service internals and improve engine protection

Anti-vibration and adjustable handle

- Low vibration handle for reduced hand and arm vibration transfer to the operator
- Height adjustable handle for improved operator comfort

Sealed clutch and belt guard

Protects against the ingress of dust and other unwanted materials that can prematurely wear out critical clutch components and V-belt

Removable extension plates

Easily adjust the width of the plate to match job requirements (Only on MVH-308GH, MVH-308DSY and MVH-508DSZ models)



MVH-308GH

POWERED by  
**HONDA**

SOIL COMPACTION

## MIKASA REVERSIBLE PLATE COMPACTORS (PETROL/DIESEL)

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |  |  |
| MVH-R60H<br>Recoil rope start                                                       | MVH-158GH<br>Recoil rope start                                                      | MVH-158DY<br>Recoil rope start                                                      | MVH-308GH<br>Recoil rope start                                                      | MVH-308DSY<br>Electric key start                                                    | MVH-508DSZ<br>Electric key start                                                    |
| Plate size (w x l)                                                                  | Plate size (w x l)                                                                  | Plate size (w x l)                                                                  | Plate size (w x l)                                                                  | Plate size (w x l)                                                                  | Plate size (w x l)                                                                  |
| Without extension plates:<br>350 mm x 480 mm                                        | Without extension plates:<br>430 mm x 700 mm                                        | Without extension plates:<br>430 mm x 700 mm                                        | Without extension plates:<br>445 mm x 860 mm                                        | Without extension plates:<br>445 mm x 860 mm                                        | Without extension plates:<br>650 mm x 900 mm                                        |
| With extension plates:<br>N/A                                                       | With extension plates:<br>N/A                                                       | With extension plates:<br>N/A                                                       | With extension plates:<br>595 mm x 860 mm                                           | With extension plates:<br>595 mm x 860 mm                                           | With extension plates:<br>800 mm x 900 mm                                           |

| Model      | Operating Weight              |                            | Vibration Frequency (vpm/Hz) | Centrifugal Force (Max) (kN) | Max Travel Speed (m/min) | Max Gradeability (%) | Max Compacted Area (m²/h) | Engine Make / Model | Max Rated Power (hp) | Fuel Type | Average HAV (m/s²) | Product Code  |
|------------|-------------------------------|----------------------------|------------------------------|------------------------------|--------------------------|----------------------|---------------------------|---------------------|----------------------|-----------|--------------------|---------------|
|            | Without extension plates (kg) | With extension plates (kg) |                              |                              |                          |                      |                           |                     |                      |           |                    |               |
| MVH-R60H   | 68                            | N/A                        | 6,000<br>100                 | 15                           | 25                       | 35                   | 525                       | Honda GX120         | 4                    | P         | 6.2                | FT2VHR60-UNIT |
| MVH-158GH  | 145                           | N/A                        | 5,400<br>90                  | 27                           | 26                       | 35                   | 670                       | Honda GX200         | 6.5                  | P         | 2.9                | FT201690-UNIT |
| MVH-158DY  | 164                           | N/A                        | 5,400<br>90                  | 25                           | 26                       | 35                   | 670                       | Yanmar L48          | 4.7                  | D         | 3.3                | FT272784-UNIT |
| MVH-308GH  | 310                           | 325                        | 4,400<br>73                  | 45                           | 27                       | 35                   | 963                       | Honda GX270         | 9                    | P         | 2.8                | FT272776-UNIT |
| MVH-308DSY | 341                           | 361                        | 4,400<br>73                  | 45                           | 27                       | 35                   | 963                       | Yanmar L70          | 6.7                  | D         | 2.9                | FT272783-UNIT |
| MVH-508DSZ | 525                           | 567                        | 4,150<br>69                  | 65                           | 29                       | 35                   | 1392                      | Hatz 1D81S          | 14.1                 | D         | 5.5                | FT28DSZN-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.  
MVH-308GH, MVH-308DSY and MVH-508DSZ are supplied with extension plates.

20

21



# Mikasa Reversible Plate Compactor (Electric)

Mikasa Reversible Plate Compactors set the standard for efficient compaction of sand, gravel and cohesive soils in trenches and large construction projects. They offer high-compaction capacity, superior travel speeds and feature fully hydraulic direction control for easy direction change. Mikasa’s battery powered compaction equipment range features a Honda eGX-Series electric motor which is powered by an interchangeable lithium-ion battery pack, capable of rapidly charging to 80% capacity in only 60 minutes. These zero emission and reduced noise level machines are a great alternative to the engine powered equivalents, especially when operating in noise and fume restricted environments. Mikasa Reversible Plate Compactors are ideally suited for civil construction works, drainage contractors and the rental industry.

This product is eligible for the Flextool Promise.

**Honda eGX battery**

- Quick charging 72 volt lithium-ion battery for maximized operational productivity
- Reaches 80% charge in 60 minutes, fully charged in 90 minutes
- Interchangeable with other Mikasa battery powered soil compaction equipment

**Honda eGX motor**

- High-efficiency, high-power 3 phase brushless DC motor for maximum performance and reliability
- Zero operating emissions
- Low noise offers expanded work hours and usage in noise restricted areas
- Low motor vibration reduces operator fatigue, providing a more comfortable work environment

**Motor and battery protection frame**

- Robust frame provides superior protection against motor and battery damage
- Open frame design simplifies maintenance and offers convenient access to all serviceable components

**Lifting hook**  
Central lifting hook for easy and safe onsite handling

**Forward/reverse control lever**  
With built-in actuator for seamless and smooth transition between both forward and reverse motions

**Adjustable handle**  
Height-adjustable handle for improved operator comfort

**Sealed clutch and belt guard**  
Protects against the ingress of dust and other unwanted materials that can prematurely wear out critical clutch components and V-belt

**Optional water tank**  
Clip-on water tank for suppression of dust and asphalt works





**3 YEAR WARRANTY**

EQUIPMENT (BODY ONLY)



**2 YEAR WARRANTY**

BATTERY AND CHARGER



## MIKASA REVERSIBLE PLATE COMPACTOR (ELECTRIC)



| Model    | Operating Weight (kg) | Plate Size w x l (mm) | Vibration Frequency (vpm) | Vibration Frequency (Hz) | Max Centrifugal Force (kN) | Max Travel Speed* (m/min) | Max Gradeability (%) | Max Compacted Area (m²/h) | Motor Make / Model | Rated Power Cont / Max (kW) | Average HAV (m/s²) | Run time (min) | Product Code  |
|----------|-----------------------|-----------------------|---------------------------|--------------------------|----------------------------|---------------------------|----------------------|---------------------------|--------------------|-----------------------------|--------------------|----------------|---------------|
| MVH-eR60 | 81                    | 350 x 480             | 6,500                     | 108                      | 12                         | 24                        | 35                   | 504                       | Honda GXE2.0H      | 1.6 / 2.4                   | 5.8                | up to 35       | FT272789-UNIT |

\* Travel speeds vary based on different soil conditions. Specifications published are based on average performance results.  
\*\* 3 year warranty covers MT-e55 body only. Honda eGX battery and charger are covered by a separate 2 year warranty.

### HONDA EGX BATTERY (sold separately)

| Battery Type | Battery Capacity (Ah) | Energy Content (Wh) | Battery Weight (kg) | Voltage (V) | Charge Time                                            | Product Code  |
|--------------|-----------------------|---------------------|---------------------|-------------|--------------------------------------------------------|---------------|
| Li-ion       | 10                    | 748                 | 6.4                 | 72          | 80% charge in 60 minutes<br>100% charged in 90 minutes | FT272790-UNIT |



### HONDA EGX CHARGER (sold separately)

| Charger Weight (kg) | Voltage (V/A) | Product Code  |
|---------------------|---------------|---------------|
| 11.0                | 240 / 10      | FT272791-UNIT |



### WATER TANK

| Model   | Product Code  |
|---------|---------------|
| MVC-e60 | NPS05148-UNIT |







Flextool TuffTruk® (Electric)

Flextool's range of electric TuffTruk mini dumpers provide maximum versatility and efficient operation.

With 8 hours of runtime, the Flextool TuffTruk can sustain emission-free operation throughout the day. Its compact design and articulated steering ensure exceptional manoeuvrability, making it ideal for various job sites.

Operator safety is optimised with the 2-stage self-tipping skip and electric motor brake system, while the wide profile mud gripper tyres, excellent load capacity and robust, heavy-duty construction prove the Flextool TuffTruk is designed for all types of materials and tough terrains across a variety of trades.

This product is eligible for the Flextool Promise

**Large capacity poly tray**

- Payload of up to 500 kg
- Easy cleanout
- Reduced noise

**Two stage self-tipping skip**

- No manual lifting
- Ultimate tip angle ensures totally empty skip

**Adjustable handles**

For superior ergonomic and operator comfort

**Articulated steering function**

- Ultimate manoeuvrability
- Precise and easy steering in hard to access and tight spaces

**Electric brake system**

- Safe parking mode
- Superior operator safety

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Locking pin**

Prevents articulation during transportation

**Offset rim wheels**

Wheels can be flipped to reduce operating width to match narrow poly bucket (730 mm)

**Fully sealed drive system**

- Low maintenance and durable
- Smooth and precise operation
- No separate gearboxes or drive belts

**Battery powered**

- 8 Hours runtime
- Zero operating emissions
- Quiet operation
- Regenerative braking system helps slow down when stopping and increases battery efficiency

**Constant electric transaxle 4WD design**

- Wide profile mud gripper tyres
- Ultimate traction and drive



EB500

FLEXTOOL TUFFTRUK® – MINI DUMPERS (ELECTRIC)



| Model                         | EB300                       | EB500                       | EB800                         |
|-------------------------------|-----------------------------|-----------------------------|-------------------------------|
| Drive                         | 2WD                         | 4WD                         | 4WD                           |
| Operation Type                | Walk-Behind                 | Walk-Behind                 | Stand-Behind Platform         |
| Max Payload (kg/m³)           | 300 / 0.20                  | 500 / 0.35                  | 800 / 0.43                    |
| Operating Width (mm)          | 730                         | 850                         | 895                           |
| Unladen Operating Weight (kg) | 120                         | 240                         | 550                           |
| Working Gradient (deg)        | 15                          | 25                          | 10 Constant / 15 Intermittent |
| Drive and Controls            | 1 x 24 V Transaxle          | 2 x 24 V Transaxle          | 2 x 24 V Transaxle            |
| Brake System                  | Electric                    | Electric                    | Electric                      |
| Tyres (Standard)              | Mud Gripper Pneumatic       | Mud Gripper Pneumatic       | Mud Gripper Pneumatic         |
| Travel Speed Fwd / Rev (km/h) | 5.6 / 2.4                   | 5.6 / 2.4                   | 4.0 / 4.0                     |
| Noise level (dB)              | < 76                        | < 76                        | < 82                          |
| Hand Arm Vibration (m/s²)     | 2.5                         | 2.5                         | N/A                           |
| Motor / Power                 | DC Motor - 1 x 600 W / 24 V | DC Motor - 2 x 750 W / 24 V | DC Motor - 2 x 1400 W / 24 V  |
| Battery Type                  | 2 x 12 V AGM Batteries      | 2 x 12 V AGM Batteries      | 4 x 6 V AGM Batteries         |
| Product Code                  | FT202513-UNIT               | FT202511-UNIT               | FT202514-UNIT                 |



Flextool TuffTruk® (Petrol)

Flextool’s range of TuffTruk mini dumpers provide maximum versatility and light-touch operation. Available in both battery power and petrol engine, the TuffTruk achieves ultimate manoeuvrability with its compact size and articulated steering function.

Operator safety is optimised with the 2-stage self-tipping skip and automatic motor brake system, while the wide profile mud gripper tyres, excellent load capacity and robust, heavy-duty construction prove the Flextool TuffTruk is designed for all types of materials and tough terrains across a variety of trades.

This product is eligible for the Flextool Promise.

**Large capacity poly tray**

- Payload of up to 450 kg
- Easy cleanout
- Reduced noise

**Two stage self-tipping skip**

- No manual lifting
- Ultimate tip angle ensures totally empty skip

**Articulated steering function**

- Patented centre steering system
  - Ultimate manoeuvrability
- Precise and easy steering in hard to access and tight spaces

**Offset rim wheels**

Wheels can be flipped to reduce operating width

**Fully sealed hydrostatic drive system**

- Low maintenance and durable
- Smooth and precise operation
- No separate gearboxes or drive belts

**Automated motor brake system**

- Safe parking mode
- Superior operator safety

**Honda GX200 engine**

Provides hassle free operation and low engine emissions

**Constant hydrostatic 4WD design**

- Wide profile mud gripper tyres
- Ultimate traction and drive

**B450G**

**POWERED by HONDA**

FLEXTOOL TUFFTRUK® – MINI DUMPER (PETROL)

| Model | Max Payload (kg/m³) | Unladen Operating Weight (kg) | Working Gradient (deg) | Drive & Controls | Brake System | Travel Speed Fwd / Rev (km/h) | Noise level (dB) | Hand Arm Vibration (m/s²) | Engine Make / Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|-------|---------------------|-------------------------------|------------------------|------------------|--------------|-------------------------------|------------------|---------------------------|---------------------|----------------------|-----------|---------------|
| B450G | 450 / 0.3           | 180                           | 25                     | Hydrostatic      | Hydrostatic  | 6.4 / 2.4                     | < 96             | 4.6                       | Honda GX200         | 6.5 hp               | P         | FT202501-UNIT |

Operating Width: 850 mm  
Standard Tyres: Mud Gripper Pneumatic

ACCESSORIES

| Description                               | Suits EB500 | Suits B450G | Product Code  |
|-------------------------------------------|-------------|-------------|---------------|
| 1 TUFFTRUK TOW BALL HITCH                 | ✓           | ✓           | FT202504-UNIT |
| 2 TUFFTRUK FLAT BED – 850 MM              | ✓           | ✓           | FT202505-UNIT |
| 3 TUFFTRUK NARROW POLY BUCKET – 730 MM    | ✓           | ✗           | FT202512-UNIT |
| 4 TUFFTRUK SKIP CONTROL HANDLE            | ✓           | ✓           | FT202507-UNIT |
| 5 TUFFTRUK POWERTIP AND BUCKET ATTACHMENT | ✓           | ✗           | FT202612-UNIT |
| 6 TUFFTRUK TURF TYRE WHEELS (EACH)        | ✓           | ✓           | FT202509-UNIT |



Flextool Drive Units

Engineered with durability and efficiency at the forefront, Flextool Drive Units are designed for use in the construction, hire, mining and manufacturing industries. They are fitted with a quick action coupling for easy connection to a wide range of flexible shaft submersible pumps and concrete vibrators. Features include a heavy-duty engine protection frame, 3-tooth drive coupling and built-in lifting hook. They are available with petrol or diesel engine to suit any specific job site requirement.

These products are eligible for the Flextool Promise.

**Lifting hook**  
Central lifting hook for easy and safe onsite handling

**Universal bell housing**

- Fitted with 3-tooth drive coupling
- Compatible with most flexible shaft submersible pumps and concrete vibrators

**Dished steel base plate**  
For easy mobility over concrete reinforcing mesh



**Heavy-duty engine protection frame**  
Powder coated tubular steel roll frame for increased durability

**Honda GX160 engine**  
Provides hassle free operation and low engine emissions

FDU-P1

**Lifting hook**  
Central lifting hook for easy and safe onsite handling

**Universal bell housing**

- Fitted with 3-tooth drive coupling
- Compatible with most flexible shaft submersible pumps and concrete vibrators

**Heavy-duty rubber mounts**  
For vibration isolation allowing sturdy operation when stationary

**Dished steel base plate**  
For easy mobility over concrete reinforcing mesh



**Heavy-duty engine protection frame**  
Powder coated tubular steel roll frame for increased durability

**Honda GX160 engine**  
Provides hassle free operation and low engine emissions

FDU-P2

POWERED by  
**HONDA**

FLEXTOOL DRIVE UNITS



**FDU-P1**  
(Standard)



**FDU-P2**  
(Super)



**FDU-P3**  
(Heavy-duty)



**FDU-D2**  
(Diesel)



**FDU-DE2**  
(Diesel electric start)

| Model                           | Operating Weight (kg) | Engine Speed (rpm) | Vibration Isolating Mounts | Lifting Hook | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|---------------------------------|-----------------------|--------------------|----------------------------|--------------|-------------|--------------|----------------------|-----------|---------------|
| FDU-P1 (Standard)               | 28.5                  | 3000               | No                         | Yes          | Honda       | GX160        | 5.5                  | P         | FT201802-UNIT |
| FDU-P2 (Super)                  | 32                    | 3000               | Yes                        | Yes          | Honda       | GX160        | 5.5                  | P         | FT201798-UNIT |
| FDU-P3 (Heavy-duty)             | 38.5                  | 3000               | Yes                        | Yes          | Honda       | GX270        | 9                    | P         | FT201799-UNIT |
| FDU-D2 (Diesel recoil start)    | 38                    | 3000               | Yes                        | Yes          | Yanmar      | L48          | 4.8                  | D         | FT201800-UNIT |
| FDU-DE2 (Diesel electric start) | 52                    | 3000               | Yes                        | Yes          | Yanmar      | L48          | 4.8                  | D         | FT201819-UNIT |

PETROL DRIVE UNITS

Petrol drive units are available with Honda four-stroke motors. An oil level sensor is fitted to protect the motor from a lack of crankcase oil.

APPLICATIONS

- Compatible with Flextool Flexshaft Submersible Pumps and Flextool Flexshaft Concrete Vibrators
- Construction, hire industry and manufacturing industry

DIESEL DRIVE UNITS

Diesel drive units are ideal for unattended operation and long term reliability. Available in both recoil or key start for easy operation.

APPLICATIONS


- Compatible with Flextool Flexshaft Submersible Pumps and Flextool Flexshaft Concrete Vibrators
- Hazardous areas including mining, tunnels and refineries



Flextool Flexshaft Submersible Pumps

The Flextool FP212 series of flexible shaft submersible pumps set the benchmark for performance and durability.

Flextool flexshaft submersible pumps are highly efficient units which are operated by petrol or diesel portable drive units. Flextool pumps are completely self-priming and extremely robust in their design. The flexible drive shaft facilitates use in many situations where close coupled pumps would not be suitable. The FP212 series come with 3 x 1 metre long flexshaft support springs which protect the drive shaft when operating over the sharp edge of excavations, pits, dams and other similar applications. Plus all pumps include an 8 metre support rope.

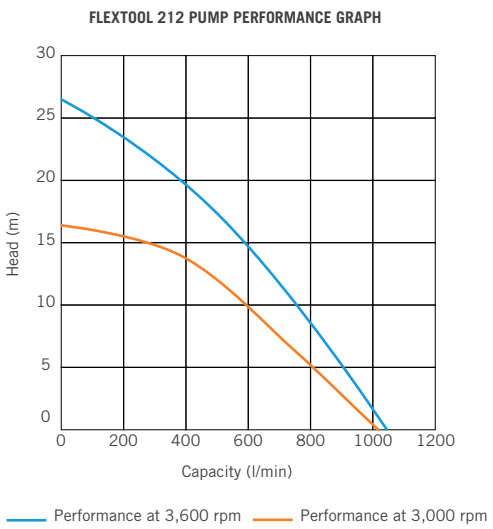

**Flexshaft support springs**  
Protect the drive shaft when operating over the sharp edge of excavations, pits, dams, etc.

**Large solids pumping capacity**  
For rapid pumping of solids in even the toughest of conditions (of up to 28 mm / 1.1 inch)

**8 metre support rope**  
For use when the pump head is unable to rest on a surface

**Corrosion-resistant stainless-steel spindle**  
Resists corrosion and extends service life of pump

**Seven oil seals**  
Provides superior protection to bearings and reduces maintenance intervals

**Hardened steel wear plates**  
Protects components from wear and extends service life of pump when used in abrasive pumping applications

**Lifting eyelets**  
For connection of rope or chain when lowering into deep pits to protect flexshaft from stretching

**Full aluminium pump head**  
Lightweight aluminium pump body, bearing housing and strainer for easy jobsite manoeuvrability

**Quick-action camlock hose fittings**  
For tool-free and quick connection of hose fittings

**Oil bath lubrication**  
Protects against overheating when not submerged in water (runs dry)

**Heavy-duty and double row bearings**  
For durability and extended service life

**Heavy-duty choke resistant impeller**  
Designed to resist choking and overload when foreign objects enter pump body

FP212-G

GENERAL PURPOSE PUMPS

APPLICATIONS

- Excavations pits
- Construction sites
- Pier holes
- Dams
- Swimming pools
- Trenches




| Model    | Flexshaft Length<br>m (ft) | Operating Weight<br>kg (lb) | Shaft Core Diameter<br>mm (in) | Shaft Casing Diameter<br>mm (in) | Discharge Diameter<br>mm (in) | Max Discharge Head<br>m (ft) | Max Discharge L/h (gal/h) | Solids Capacity<br>mm (in) | Material (pump head) | Product Code  |
|----------|----------------------------|-----------------------------|--------------------------------|----------------------------------|-------------------------------|------------------------------|---------------------------|----------------------------|----------------------|---------------|
| FP212G-6 | 6<br>(19.7)                | 26.5<br>(58.4)              | 13<br>(0.5)                    | 32<br>(1.3)                      | 50<br>(2)                     | 26<br>(85.3)                 | 63,000<br>(16,642)        | 28<br>(1.1)                | Aluminium            | FT201801-UNIT |
| FP212G-9 | 9<br>(29.5)                | 38<br>(83.8)                | 13<br>(0.5)                    | 32<br>(1.3)                      | 50<br>(2)                     | 26<br>(85.3)                 | 63,000<br>(16,642)        | 28<br>(1.1)                | Aluminium            | FT201803-UNIT |

ABRASION RESISTANT PUMPS

APPLICATIONS

- Quarries
- Sandy soils
- Sand pits
- Slurry

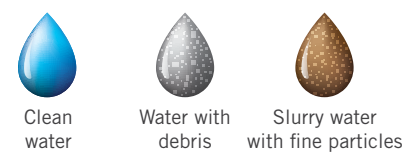

| Model    | Flexshaft Length<br>m (ft) | Operating Weight<br>kg (lb) | Shaft Core Diameter<br>mm (in) | Shaft Casing Diameter<br>mm (in) | Discharge Diameter<br>mm (in) | Max Discharge Head<br>m (ft) | Max Discharge L/h (gal/h) | Solids Capacity<br>mm (in) | Material (pump head)    | Product Code  |
|----------|----------------------------|-----------------------------|--------------------------------|----------------------------------|-------------------------------|------------------------------|---------------------------|----------------------------|-------------------------|---------------|
| FP212A-6 | 6<br>(19.7)                | 34<br>(75)                  | 15<br>(0.6)                    | 38<br>(1.5)                      | 50<br>(2)                     | 26<br>(85.3)                 | 63,000<br>(16,642)        | 28<br>(1.1)                | Aluminium and cast iron | FT201805-UNIT |
| FP212A-9 | 9<br>(29.5)                | 42.5<br>(93.7)              | 15<br>(0.6)                    | 38<br>(1.5)                      | 50<br>(2)                     | 26<br>(85.3)                 | 63,000<br>(16,642)        | 28<br>(1.1)                | Aluminium and cast iron | FT201818-UNIT |

CHEMICAL RESISTANT PUMPS\*

APPLICATIONS

- Anodisers
- Industrial waste
- Salty water
- Others



\*Improved chemical resistance to a wide range of chemicals compared to general purpose pumps.

| Model    | Flexshaft Length<br>m (ft) | Operating Weight<br>kg (lb) | Shaft Core Diameter<br>mm (in) | Shaft Casing Diameter<br>mm (in) | Discharge Diameter<br>mm (in) | Max Discharge Head<br>m (ft) | Max Discharge L/h (gal/h) | Solids Capacity<br>mm (in) | Material (pump head) | Product Code  |
|----------|----------------------------|-----------------------------|--------------------------------|----------------------------------|-------------------------------|------------------------------|---------------------------|----------------------------|----------------------|---------------|
| FP212C-6 | 6<br>(19.7)                | 37.5<br>(82.7)              | 15<br>(0.6)                    | 38<br>(1.5)                      | 50<br>(2)                     | 26<br>(85.3)                 | 63,000<br>(16,642)        | 28<br>(1.1)                | Cast iron            | FT201817-UNIT |

FLEXTOOL LAY FLAT HOSE

APPLICATIONS

- Agricultural irrigation
- Deep excavations
- Industrial and construction applications



| Hose Type                                          | Hose Length<br>m (ft) | Hose Diameter<br>mm (in) | Fitted With         | Product Code  |
|----------------------------------------------------|-----------------------|--------------------------|---------------------|---------------|
| Blue - Standard Duty<br>Lightweight reinforced PVC | 20<br>(65.6)          | 50<br>(2)                | Coupling and Joiner | FT200032-UNIT |

FLEXTOOL EXTENSION FLEXSHAFTS

Compatible with all Flextool Flexshaft Submersible Pumps and Flexshaft Concrete Vibrators.

APPLICATIONS

- Deep columns
- Elevated formwork
- Deep excavations



| Model | Flexshaft Length<br>m (ft) | Operating Weight<br>kg (lb) | Shaft Inner Core Diameter<br>mm (in) | Shaft Outer Casing Diameter<br>mm (in) | Product Code  |
|-------|----------------------------|-----------------------------|--------------------------------------|----------------------------------------|---------------|
| FES-2 | 6<br>(19.7)                | 20<br>(44)                  | 13<br>(0.5)                          | 32<br>(1.3)                            | FT201804-UNIT |

## Flextool Electric Submersible Pumps (Puddle Sucker)

Flextool Electric Submersible Pumps are engineered for high-performance dewatering in demanding construction, hire, and industrial environments. Featuring a heavy-duty stainless steel pump body and a robust silicon graphite mechanical seal for enhanced durability, the FP-P1M 1-Inch Puddle Sucker is built to handle harsh site conditions while delivering long service life. The high-performance semi-vortex impeller enables efficient handling of water with reliable output of up to 170 litres per minute.

Designed for ease of use with quick-action camlock hose fittings that allow for fast, tool-free connection. A heavy-duty rubber strainer protects the pump from large particle ingress and absorbs shock during operation, ensuring dependable performance and extreme low-level pumping down to depths of 1 mm.

These products are eligible for the Flextool Promise.



## Flextool Electric Submersible Pumps (Trash)

Flextool Electric Submersible Pumps are engineered for high-performance dewatering in demanding construction, hire, and industrial environments. Featuring a heavy-duty cast iron pump body for enhanced abrasion resistance and a robust silicon graphite mechanical seal, the range is built to handle harsh site conditions while delivering long service life.

The high-performance semi-vortex impeller and integrated agitator enable efficient handling of water containing sand, solids, and debris, with a large solid passage capacity of up to 7 mm. Producing flow rates of up to 210 litres per minute, the pumps provide reliable and consistent output for fast water removal.

Designed for ease of use, quick-action camlock hose fittings allow for fast, tool-free connections, while the integrated float switch enables automatic on/off operation based on water level. A heavy-duty rubber strainer protects the pump from large particle ingress and absorbs shock during operation, ensuring dependable performance across a wide range of site applications.

These products are eligible for the Flextool Promise.



Also available without float switch feature (FP-T2M)



FLEXTOOL ELECTRIC SUBMERSIBLE PUMPS



FP-P1M

FP-T2M

FP-T2F

| Model  | Operating Weight<br>kg (lb) | Voltage<br>V/Hz | Motor<br>W | Discharge Diameter<br>mm (in) | Max Discharge Head<br>m (ft) | Max Discharge<br>L/h (gal/h) | Max Solids Capacity<br>mm (in) | Shut Off<br>Manual / Float | IP Rating | Product Code  |
|--------|-----------------------------|-----------------|------------|-------------------------------|------------------------------|------------------------------|--------------------------------|----------------------------|-----------|---------------|
| FP-P1M | 12.65<br>(27.9)             | 240/50          | 530        | 25<br>(1.0)                   | 11<br>(36)                   | 10,180<br>(2,689)            | 6<br>(0.2)                     | Manual                     | 68        | FT201871-UNIT |
| FP-T2M | 11.75<br>(25.9)             | 240/50          | 500        | 50<br>(2.0)                   | 12<br>(39)                   | 12,600<br>(3,329)            | 7<br>(0.3)                     | Manual                     | 68        | FT201872-UNIT |
| FP-T2F | 12.05<br>(26.6)             | 240/50          | 500        | 50<br>(2.0)                   | 12<br>(39)                   | 12,600<br>(3,329)            | 7<br>(0.3)                     | Float                      | 68        | FT201873-UNIT |



Flextool Flexshaft Concrete Vibrator FVP Series

The Flextool Flexshaft Concrete Vibrator FVP Series is Australia’s original series of immersion concrete vibrators, producing high-frequency vibration allowing for the efficient compaction of all types of concrete mixes. Operator safety and comfort are optimised with the rubber support sleeve and vibration counter spring. The Flextool Flexshaft Concrete Vibrator FVP Series has triple bearing technology and double oil seal protection for optimum performance and longer service life.

This product is eligible for the Flextool Promise.



FLEXTOOL FLEXSHAFT CONCRETE VIBRATORS FVP SERIES - STEEL TIP



| Model   | Nose Cap Type | Vibrator Head Diameter mm (in) | Flexshaft Length m (ft) | Operating Weight kg (lb) | Shaft Inner Core Diameter mm (in) | Shaft Casing Diameter mm (in) | Vibration Frequency (vpm) | Vibration Frequency (Hz) | Amplitude in Air mm (in) | Product Code  |
|---------|---------------|--------------------------------|-------------------------|--------------------------|-----------------------------------|-------------------------------|---------------------------|--------------------------|--------------------------|---------------|
| FVP30-6 | Steel         | 28 (1.1)                       | 6 (19.7)                | 14 (30.9)                | 8 (0.3)                           | 28 (1.1)                      | 12,600                    | 210                      | 1.4 (0.055)              | FT201794-UNIT |
| FVP40-6 | Steel         | 38 (1.5)                       | 6 (19.7)                | 19 (41.9)                | 12 (0.5)                          | 32 (1.3)                      | 12,300                    | 205                      | 1.7 (0.067)              | FT201795-UNIT |
| FVP40-9 | Steel         | 38 (1.5)                       | 9 (29.5)                | 26 (57.3)                | 12 (0.5)                          | 32 (1.3)                      | 12,300                    | 205                      | 1.7 (0.067)              | FT201793-UNIT |
| FVP50-6 | Steel         | 50 (2)                         | 6 (19.7)                | 22 (48.5)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.2 (0.087)              | FT201796-UNIT |
| FVP50-9 | Steel         | 50 (2)                         | 9 (29.5)                | 28 (61.7)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.2 (0.087)              | FT201792-UNIT |
| FVP60-6 | Steel         | 60 (2.4)                       | 6 (19.7)                | 23 (50.7)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.4 (0.094)              | FT201797-UNIT |
| FVP60-9 | Steel         | 60 (2.4)                       | 9 (29.5)                | 29 (63.9)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.4 (0.094)              | FT201791-UNIT |

FLEXTOOL FLEXSHAFT CONCRETE VIBRATOR FVP SERIES – RUBBER TIP



Immersion vibrator shafts fitted with resilient nose caps extend the life of form boards and improves off-the-form finishes.

| Model    | Nose Cap Type | Vibrator Head Diameter mm (in) | Flexshaft Length m (ft) | Operating Weight kg (lb) | Shaft Inner Core Diameter mm (in) | Shaft Casing Diameter mm (in) | Vibration Frequency (vpm) | Vibration Frequency (Hz) | Amplitude in Air mm (in) | Product Code  |
|----------|---------------|--------------------------------|-------------------------|--------------------------|-----------------------------------|-------------------------------|---------------------------|--------------------------|--------------------------|---------------|
| FVP40R-6 | Rubber        | 38 (1.5)                       | 6 (19.7)                | 19 (41.9)                | 12 (0.5)                          | 32 (1.3)                      | 12,300                    | 205                      | 1.7 (0.067)              | FT201787-UNIT |
| FVP50R-6 | Rubber        | 50 (2)                         | 6 (19.7)                | 22 (48.5)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.2 (0.087)              | FT201788-UNIT |
| FVP60R-6 | Rubber        | 60 (2.4)                       | 6 (19.7)                | 23 (50.7)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.4 (0.094)              | FT201789-UNIT |
| FVP60R-9 | Rubber        | 60 (2.4)                       | 9 (29.5)                | 29 (63.9)                | 12 (0.5)                          | 32 (1.3)                      | 12,000                    | 200                      | 2.4 (0.094)              | FT201790-UNIT |



Flextool PowerVibe®

The Flextool PowerVibe is a high-frequency concrete vibrator featuring an integrated motor-in-barrel design, inline inverter control box and inline RCD protection to provide first-class operator safety and comfort.

The Flextool PowerVibe is fully electric which means it can operate with minimal noise and without engine exhaust fumes, making it the ideal choice for jobs in noise sensitive and enclosed environments. The high-frequency vibration technology achieves optimum vibration consistency resulting in more efficient consolidation of concrete when operating under load.

This product is eligible for the Flextool Promise.

**Inline inverter control box**

Fully sealed and weather proof

**Fully electric**

- Zero operating emissions
- Quiet operation
- Plugs into a standard 240 volt / 10 amp power outlet

**Inline RCD protector**

For improved operator safety



**Lightweight design**

For improved portability and operator safety

**High-frequency technology**

- Features integrated motor-in-barrel design achieving greater vibration consistency
- Optimum consolidation of all types of concrete mixes when operating under load
- Low vibration and heat transfer to the operator

**Hardened steel vibrator head**

- For extended service life
- Available in 45 mm and 60 mm diameter

| Model   | Operating Weight kg | Vibrator Head Diameter mm | Vibrator Head Length mm | Flexshaft Length m | Amplitude mm | Centrifugal Force kN | Vibration Frequency vpm | Vibration Frequency Hz | Voltage v | Current A | Power Cable Length m | Product Code  |
|---------|---------------------|---------------------------|-------------------------|--------------------|--------------|----------------------|-------------------------|------------------------|-----------|-----------|----------------------|---------------|
| FPV45-6 | 17.7                | 45                        | 368                     | 6                  | 2            | 2.6                  | 12,000                  | 200                    | 240       | 6         | 10                   | FT201831-UNIT |
| FPV60-6 | 20.5                | 60                        | 436                     | 6                  | 2.2          | 4.5                  | 12,000                  | 200                    | 240       | 6         | 10                   | FT201832-UNIT |





Flextool PortaVibe®

The Flextool PortaVibe provides the ultimate solution in concrete vibration and is suitable for a wide range of applications, including slabs, footings, stairways and footpaths.

The new contoured engine protection guard on the FVE44-2G, offers improved durability and engine protection during operation and transport. Its heavy-duty yet lightweight design is highly portable and easy to operate. The unit is fitted with a flexshaft rubber support sleeve for easier cleaning and improved support compared to metal spring models. The reliable Honda 4-stroke engine allows for hassle free operation.

This product is eligible for the Flextool Promise.



**Honda GX35 engine**  
Provides hassle free operation and low engine emissions

**Contoured engine protection guard**

- Improved durability and engine protection during operation and transport
- Protects critical engine components from concrete build-up

**Operating switch**  
Convenient on / off switch and throttle control built into the handle

**Adjustable handle and carry strap**

- Optimised operator comfort
- Complete operator control

**Lightweight and balanced**

- Heavy-duty yet lightweight design
- Highly portable
- Optimum manoeuvrability

**Flexshaft rubber support sleeve**  
For easier cleaning and improved support compared to metal springs

**High-amplitude vibrating head**

- For maximum efficiency and rapid consolidation of all types of concrete mixes
- Hardened steel for extended service life



FVE44-2G



FLEXTOOL PORTAVIBE® CONCRETE VIBRATORS



| Model    | Nose Cap Type | Vibrator Head Diameter mm (in) | Flexshaft Length mm (in) | Operating Weight kg (lb) | Vibration Frequency (vpm) | Vibration Frequency (Hz) | Amplitude in Air mm (in) | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|----------|---------------|--------------------------------|--------------------------|--------------------------|---------------------------|--------------------------|--------------------------|-------------|--------------|----------------------|-----------|---------------|
| FVE44-2  | Steel         | 44 (1.7)                       | 540 (21.3)               | 11.5 (25.4)              | 9,000                     | 150                      | 2.8 (0.11)               | Honda       | GX35         | 1.5                  | P         | FT201807-UNIT |
| FVE44-2G | Steel         | 44 (1.7)                       | 540 (21.3)               | 12.5 (27.6)              | 9,000                     | 150                      | 2.8 (0.11)               | Honda       | GX35         | 1.5                  | P         | FT200036-UNIT |



Engine Guard Front



Engine Guard Back



Flextool PortaVibe® Backpack

The Flextool PortaVibe Backpack concrete vibrator combines performance and comfort. The ergonomic contouring aluminium frame design and 4-point fully adjustable padded harness evenly distribute weight to both shoulders and hips to improve user comfort whilst reducing back strain and fatigue.

This product is eligible for the Flextool Promise.



FLEXTOOL PORTAVIBE® BACKPACK - FVE-BP

| Model  | Operating Weight<br>kg (lb) | Engine Make | Engine Model | Max Rated Power<br>(hp) | Fuel Type | Product Code  |
|--------|-----------------------------|-------------|--------------|-------------------------|-----------|---------------|
| FVE-BP | 7.7<br>(17)                 | Honda       | GX35         | 1.5                     |           | FT201857-UNIT |

FLEXTOOL PORTAVIBE® BACKPACK - FLEXSHAFTS

| Model  | Operating Weight<br>kg (lb) | Flexshaft Length<br>m (ft) | Coupling Type    | Product Code  |
|--------|-----------------------------|----------------------------|------------------|---------------|
| FVE-F2 | 3.9<br>(8.6)                | 2<br>(6.6)                 | Screw and Spline | FT201858-UNIT |
| FVE-F3 | 5.5<br>(12.1)               | 3<br>(9.8)                 | Screw and Spline | FT201859-UNIT |

FLEXTOOL PORTAVIBE® BACKPACK - VIBRATOR HEADS

| Model   | Operating Weight<br>kg (lb) | Vibrator Head Diameter<br>mm (in) | Nose Cap Type | Vibration Frequency<br>(vpm) | Vibration Frequency<br>(Hz) | Amplitude in Air<br>mm (in) | Product Code  |
|---------|-----------------------------|-----------------------------------|---------------|------------------------------|-----------------------------|-----------------------------|---------------|
| FVE-H34 | 2.3<br>(5.1)                | 34<br>(1.3)                       | Steel         | 9,000                        | 160                         | 1.5<br>(0.06)               | FT201860-UNIT |
| FVE-H44 | 3.2<br>(7.1)                | 44<br>(1.7)                       | Steel         | 9,000                        | 150                         | 2.8<br>(0.11)               | FT201861-UNIT |





Flextool PortaScreed®

Featuring high-frequency vibration across the entire width of the extrusion blade, the Flextool PortaScreed FPS-3 delivers accurate and high-quality screeding that is much faster than traditional screeding methods. The PortaScreed has been optimised to improve operator comfort and efficiency, incorporating handle vibration isolators for reduced vibration transfer to the operator, a fully adjustable twin-handle system for easy height adjustment and a sturdy spring-loaded kickstand for straightforward refuelling and storage.

This product is eligible for the Flextool Promise.

**Lightweight and portable design**  
For easy transport and onsite manoeuvrability

**Padded lifting handle**

- For optimised portability
- Provides additional engine protection

**Side exhaust Honda GX35 engine**

- Provides hassle free operation and low engine emissions
- Side exhaust directs engine fumes away from the operator

**High-frequency vibration**

- High-frequency vibration across the entire width of the extrusion blade for optimum efficiency
- Delivers fast, accurate and high-quality screeding

**Fully adjustable twin-handle system**

- For easy height adjustment
- No assembly required

**Spring-loaded heavy-duty kickstand**  
For easy refuelling and storage

**Quick-change extrusion blades**  
Efficient and fast blade changing (in approximately two minutes)

**Special blade extrusion profile**  
Cuts, folds and smooths concrete

**Handle vibration isolators**

- For reduced hand and arm vibration transfer to the operator
- For reduced operator fatigue

**Rounded extrusion blade ends**  
For easy navigation around obstacles



POWERED by HONDA

FLEXTOOL PORTASCREED® - FPS-3 (BODY)

| Model | Operating Weight kg (lb) | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|-------|--------------------------|-------------|--------------|----------------------|-----------|---------------|
| FPS-3 | 16 (35.3)                | Honda       | GX35         | 1.5                  | P         | FT201833-UNIT |



FLEXTOOL PORTASCREED® - EXTRUSION BLADES (sold separately)

| Length m (ft) | Weight kg (lb) | Product Code  |
|---------------|----------------|---------------|
| 1.22 (4)      | 2.9 (6.4)      | FT201811-UNIT |
| 2.44 (8)      | 5.8 (12.8)     | FT201812-UNIT |
| 3.05 (10)     | 7.3 (16.1)     | FT201813-UNIT |
| 3.66 (12)     | 8.7 (19.2)     | FT201814-UNIT |
| 4.88 (16)     | 10.2 (22.5)    | FT201815-UNIT |





MQ Whiteman DuoScreed (Special Order)

Generating high-frequency vibration, the MQ Whiteman DuoScreed is a versatile concrete power screed designed for optimised and efficient screeding. Suitable for both form-to-form and wet screeding applications, the MQ Whiteman DuoScreed's durable extruded aluminium alloy blades incorporate a unique blade profile that allows a single operator to quickly and accurately strike off concrete floors.

The fully adjustable eccentric weights allow the operator to finetune the vibration output to suit the blade length and concrete type. Operator comfort is further optimised with fully adjustable handles, a reliable Honda GX35 engine, and handle vibration isolators for reduced vibration transfer to the operator.

Extrusion blades are available in various lengths to suit any job requirement (sold separately).

This product is eligible for the Flextool Promise.

**Fully adjustable handle**

- For quick and easy adjustment of handle to suit operator and screeding application
- No tools required

**Support stand**

For easy start up, serviceability and storage

**Quick-change extrusion blades**

Fast, efficient and completely tool-free blade changeover

**High-strength blades**

Durable aluminium alloy blades transmit vibration to the slab for effective consolidation

**Honda GX35 engine**

Provides hassle free operation and low engine emissions

**Lifting bar**

- Integrated lifting bar for improved handling
- Provides additional engine protection

**Handle vibration isolators**

- For reduced hand and arm vibration transfer to the operator
- For reduced operator fatigue

**Adjustable high-frequency vibration**

- High-frequency vibration across the entire screed width for optimum efficiency
- Eccentric weights are fully adjustable to control vibration output to match small and large blades
- No tools required



DUOSCREED (BODY)



| Model   | Operating Weight<br>kg (lb) | Engine Make | Engine Model | Max Rated Power<br>hp | Fuel Type | Product Code  |
|---------|-----------------------------|-------------|--------------|-----------------------|-----------|---------------|
| DSGPULW | 14.5 (32)                   | Honda       | GX35         | 1.5                   |           | FT269064-UNIT |

MQ WHITEMAN DUOSCREED - EXTRUSION BLADES (sold separately)


| Length<br>m (ft) | Weight<br>kg (lb) | Product<br>Code |
|------------------|-------------------|-----------------|
| 1.83 (6)         | 6.35 (14)         | FT269059-UNIT   |
| 2.44 (8)         | 8.15 (18)         | FT269060-UNIT   |
| 3.05 (10)        | 10.45 (23)        | FT269061-UNIT   |
| 3.66 (12)        | 12.7 (28)         | FT269057-UNIT   |
| 4.27 (14)        | 14.5 (32)         | FT269062-UNIT   |
| 4.88 (16)        | 16.8 (37)         | FT269063-UNIT   |



Adjustable eccentric weights



Adjustable handle



Wet-screed edge

Form-to-form screed edge

Duoscreed cross-section




Flextool Double Beam Screed FDBS Series

Flextool Double Beam Screeds are an efficient means of levelling and compacting large areas of concrete. Increase placement rates as a vibrating screed strikes and compacts concrete in one pass. The vibratory motion of the beams imparts a self-propelling motion to the screed assisting it to travel over the concrete.

Pretensioned beams on both 6.5 m and 8.2 m models allow the surface flatness to be controlled by adjusting beam pretension and are recommended for precision finishing.

This product is covered by the Flextool Promise.

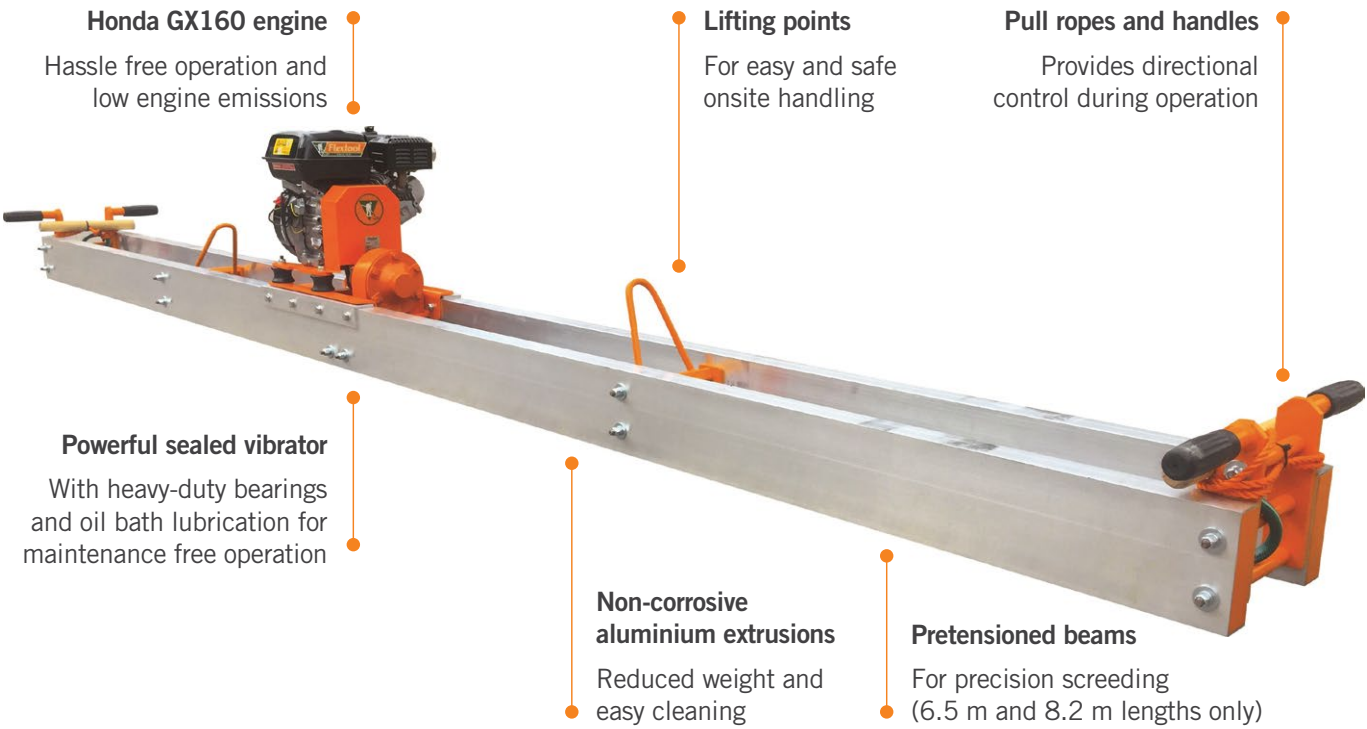

POWERED by  
**HONDA**

FLEXTOOL DOUBLE BEAM SCREED – ENGINE KIT

| Model   | Operating Weight (kg) | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|---------|-----------------------|-------------|--------------|----------------------|-----------|---------------|
| FDBS-EK | 37                    | Honda       | GX160        | 5.5                  | P         | FT202050-UNIT |



FLEXTOOL DOUBLE BEAM SCREED – BEAMS

| Weight (kg) | Length (m) | Pretensioned | Product Code  |
|-------------|------------|--------------|---------------|
| 45          | 4.1        | No           | FT201320-UNIT |
| 80          | 6.5        | Yes          | FT201532-UNIT |
| 94          | 8.2        | Yes          | FT201611-UNIT |






MQ Whiteman Truss Screed MSHE Series

The MQ Whiteman MSHE series Truss Screed is a superior truss screed for levelling pavement and industrial floors. Its modular design gives operators the ability to adapt the screed to meet their length requirements by adding or removing sections. Featuring durable steel construction, a powerful Honda engine and 10-gauge galvanised steel screed blades, this truss screed will provide dependable and maximum performance on every job.

This product is eligible for the Flextool Promise.

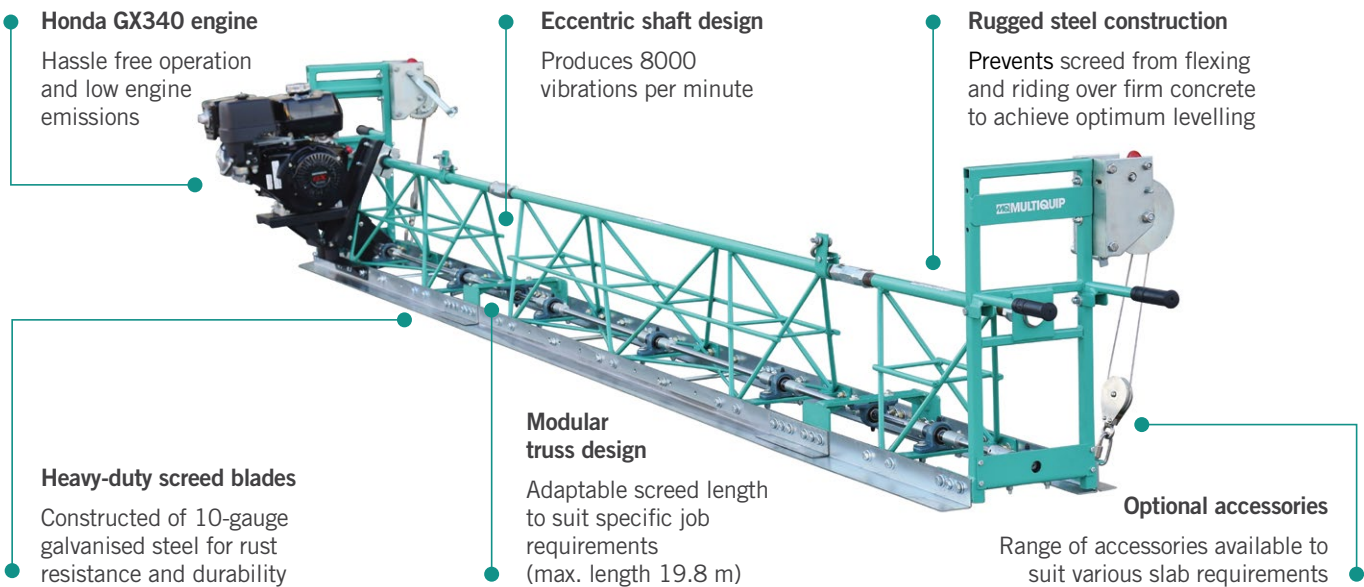

MQ WHITEMAN TRUSS SCREED – ENGINE KIT

| Model      | Operating Weight (kg) | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Required item* | Product Code  |
|------------|-----------------------|-------------|--------------|----------------------|-----------|----------------|---------------|
| MSHEKIT11H | 51                    | Honda       | GX340        | 11                   |           | Yes            | FT269045-UNIT |


MQ WHITEMAN TRUSS SCREED – SECTIONS

| Model  | Length (m) | Operating Weight (kg) | Required item* | Product Code  |
|--------|------------|-----------------------|----------------|---------------|
| MSHE25 | 0.76       | 26                    | Yes**          | FT269042-UNIT |
| MSHE50 | 1.5        | 43                    | Yes**          | FT269043-UNIT |
| MSHE75 | 2.3        | 62                    | Yes**          | FT269044-UNIT |

\* This information outlines whether an item is required when purchasing a new MQ Whiteman Truss Screed, or if it is an optional extra. Required items must be purchased in order to assemble a fully operational truss screed.  
\*\* Choose any configuration of truss screed sections to achieve required screed length.

MQ WHITEMAN TRUSS SCREED – COMPONENTS

| Model       | Product Description                                                            | Operating Weight (kg) | Required item* | Product Code  |
|-------------|--------------------------------------------------------------------------------|-----------------------|----------------|---------------|
| 1 MSHEH     | Truss screed end handle set (set of two)                                       | 27                    | Yes            | FT269046-UNIT |
| 2 WSHW      | Truss screed manual winches set (set of two)                                   | 19                    | Yes            | FT269047-UNIT |
| 3 WSHEKITUJ | Truss screed invert/crown kit (up to 1/4 inch)                                 | 10                    | Optional       | FT269048-UNIT |
| 4 WSHEIC    | Truss screed invert/crown kit (over 1/4 inch)                                  | 41                    | Optional       | FT269049-UNIT |
| 5 WSKITAEBR | Truss screed adjustable roller type end bracket set (set of two)               | 12                    | Optional       | FT269050-UNIT |
| 6 WSHEPW(L) | Truss screed powered winch kit - left (adds 0.76 metre to screed length)       | 48                    | Optional       | FT269051-UNIT |
| 7 WSHEPW(R) | Truss screed powered winch kit - right (adds 0.76 metre to screed length)      | 48                    | Optional       | FT269052-UNIT |
| 8 WSHRBE    | Truss screed reinforcing bracket (recommended for screeds exceeding 10 metres) | 2.7                   | Yes            | FT269053-UNIT |

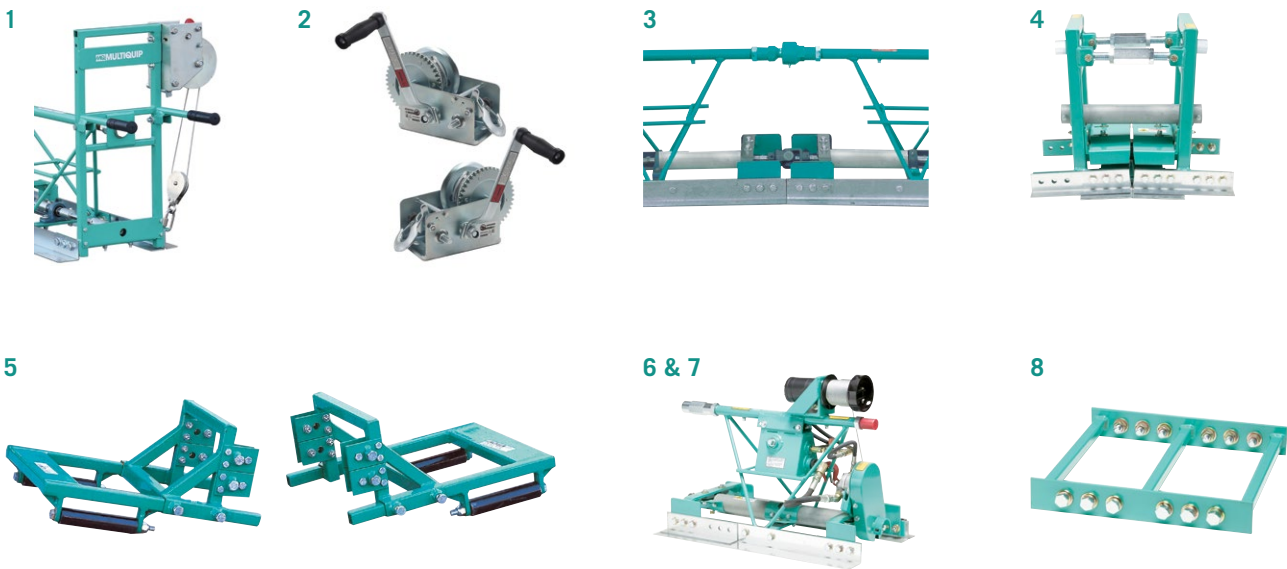

Flextool PortaTrowel®

The Flextool PortaTrowel’s lightweight design improves operator safety and allows for earlier commencement of concrete finishing when compared to heavier walk-behind machines. Matched with multi-use combination blades and a variable-length pole, this unit achieves optimum control from up to 6 metres away and allows the operator to complete finishing works without the need to step foot on the wet concrete.

This product is eligible for the Flextool Promise.



POWERED by HONDA

FLEXTOL PORTATROWEL®




The Flextool PortaTrowel is supplied **without** a handle. This should be ordered separately.

| Model | Trowel Diameter mm (in) | Operating Weight kg (lb) | Number of Blades | Speed Range rpm | Blade Pitch Max deg | Engine Make | Engine Model | Max Rated Power hp | Fuel Type | Product Code  |
|-------|-------------------------|--------------------------|------------------|-----------------|---------------------|-------------|--------------|--------------------|-----------|---------------|
| FPT30 | 760 (30)                | 20 (44)                  | 4                | 40-70           | 25                  | Honda       | GX35         | 1.5                |           | FT201898-UNIT |

FLEXTOL CLIP-TOGETHER HANDLE (Sold separately)

| Product Description                 | Maximum Number of Handles                                                                                                     | Product Code  |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------------|
| Clip-Together Handle 1.8 m (5.9 ft) | Maximum of 3 x handles to be used at one time. Additional handles will result in reduced control of the Flextool PortaTrowel. | FT4K0087-UNIT |



Only Clip-Together Handles can be used with the Flextool PortaTrowel FPT30 (Telescopic Handle does not fit)

FLEXTOL PORTATROWEL TROWEL BLADES

| Product Description                | Rotor Diameter mm (in) | Machine Model Compatibility | Blades Per Rotor | Size mm (in)         | Blade Weight kg (lb) | Blades Per Pack | Product Code  |
|------------------------------------|------------------------|-----------------------------|------------------|----------------------|----------------------|-----------------|---------------|
| Combination Trowel Blade 150 x 265 | 760 (30)               | Flextool PortaTrowel FPT30  | 4                | 150 x 265 (6 x 10.5) | 1.9 (4.2)            | 4               | FT201533-UNIT |





Flextool Walk-Behind Power Trowels

The Flextool Walk-Behind Power Trowels are available in a 34" and 40" working width. These robust, durable and reliable concrete power finishing units are ideal for residential and small commercial projects. Featuring a heavy-duty gearbox and spider, height adjustable and padded handlebar, and easy blade tilt system, they are designed for optimum performance and operator comfort.

This product is eligible for the Flextool Promise.

**Blade tilt system**  
Fast pitch mechanism for quick, on the fly adjustment of the blade angle

**Height-adjustable and padded handlebar**  
For superior ergonomics and operator comfort

**Lifting hook**  
Central lifting hook for easy and safe onsite handling

**Honda GX160 engine**  
Provides hassle free operation and low engine emissions

**Sealed clutch and belt guard**  
Protects against the ingress of unwanted materials that can prematurely wear out critical clutch components and V-belt

**Access panel**

- Easy blade replacement
- Offers convenient access to serviceable components

**Heavy-duty gearbox and spider**

- Robust and durable design for the toughest floating and finishing applications
- Reduced maintenance and extended service life



FT40-2



FLEXTOOL WALK-BEHIND POWER TROWELS



FT34-2

FT40-2

Flextool Walk-Behind Power Trowels are supplied **with** a handle.

| Model  | Trowel Diameter mm (in) | Operating Weight kg (lb) | Number of Blades | Rotor Speed Range rpm | Blade Pitch Max deg | Lifting Hook | Wheel Kit Compatibility | Engine Make | Engine Model | Max Rated Power hp | Fuel Type | Product Code  |
|--------|-------------------------|--------------------------|------------------|-----------------------|---------------------|--------------|-------------------------|-------------|--------------|--------------------|-----------|---------------|
| FT34-2 | 865 (34)                | 82 (180)                 | 4                | 70-150                | 28                  | Yes          | Yes                     | Honda       | GX160        | 5.5                | P         | FT201808-UNIT |
| FT40-2 | 1015 (40)               | 90 (198)                 | 4                | 70-150                | 28                  | Yes          | No                      | Honda       | GX160        | 5.5                | P         | FT201816-UNIT |

WHEEL KIT 34"

Suits FT34-2 only

| Model  | Operating Weight kg (lb) | Product Code  |
|--------|--------------------------|---------------|
| FTWK-2 | 7 (15)                   | FT201809-UNIT |



WALK-BEHIND POWER TROWEL ENGINE COVER

Suits all FP and FT series of Flextool Walk-Behind Power Trowels

| Description                                         | Product Code  |
|-----------------------------------------------------|---------------|
| High quality vinyl engine cover with tie down hooks | FT203433-UNIT |



TROWEL BLADES

| Suits Model | Combination Blade | Finishing Blade |
|-------------|-------------------|-----------------|
| FT34-2      | FT201821-UNIT     | FT201823-UNIT   |
| FT40-2      | FT201822-UNIT     | FT201824-UNIT   |



Combination Blade



Finishing Blade

\*See the Trowel Blades and Pan Floats selection guide on pages 70 - 71.

Flextool ProFinish® Walk-Behind Power Trowels

The Flextool ProFinish Walk-Behind Power Trowel FP436-2 is built for the professional contractor. Fitted with precision engineered components including durable spider plates, blade tilt levers and pressure plates, this machine ensures the best possible flat floor results are achieved on each and every slab.

Equipped with highly efficient gearboxes, maximum torque is transferred to the trowel rotors for superior performance at low, medium and high rpm.

Designed around operator experience, efficiency and durability, the Flextool ProFinish Series 2 provides optimum balance and smooth operation, making it ideal for residential and commercial projects.

This product is eligible for the Flextool Promise.

**Operator controls**

Centrally located on handle bar stem for quick and easy access with cables fully concealed to prevent damage

**Blade tilt system**

- Crank handle pitch mechanism for quick, on the fly adjustment of the blade angle
- Return spring keeps the blades flat when lifting the trowel on and off the job site

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Honda GX160 engine**

Provides hassle free operation and low engine emissions

**Height-adjustable and padded handlebar**

For superior ergonomics and operator comfort

**Bottle holder**

For easy storage and access to surface retardant or water bottle

**Sealed clutch and belt guard**

Protects against the ingress of unwanted materials that can prematurely wear out critical clutch components and V-belt

**Heavy-duty gearbox and spider**

- Robust and durable design for the toughest panning, floating and finishing applications
  - Reduced maintenance and extended service life
- Belt tension system to allow for quick and easy maintenance onsite



FP436-2



FLEXTOL PROFINISH® WALK-BEHIND POWER TROWELS



Flextool Walk-Behind Power Trowels are supplied **with** a handle.

| Model   | Trowel Diameter mm (in) | Operating Weight kg (lb) | Number of Blades | Rotor Speed Range rpm | Blade Pitch Max deg | Lifting Hook | Engine Make | Engine Model | Max Rated Power hp | Fuel Type | Product Code  |
|---------|-------------------------|--------------------------|------------------|-----------------------|---------------------|--------------|-------------|--------------|--------------------|-----------|---------------|
| FP424-2 | 600 (24)                | 63.5 (140)               | 4                | 75-140                | 25                  | Yes          | Honda       | GX160        | 5.5                | P         | FT220062-UNIT |
| FP436-2 | 920 (36)                | 82 (180)                 | 4                | 75-140                | 25                  | Yes          | Honda       | GX160        | 5.5                | P         | FT220063-UNIT |
| FP440-2 | 1015 (40)               | 92.5 (202)               | 4                | 75-140                | 25                  | Yes          | Honda       | GX270        | 9                  | P         | FT220065-UNIT |
| FP446-2 | 1160 (46)               | 112 (246)                | 4                | 75-140                | 25                  | Yes          | Honda       | GX390        | 13                 | P         | FT220066-UNIT |
| FP436D  | 915 (36)                | 94 (196)                 | 4                | 50-130                | 30                  | Yes          | Yanmar      | L48          | 4.7                | D         | FT23436D-UNIT |

WALK-BEHIND POWER TROWEL ENGINE COVER


Suits all FP and FT series of Flextool Walk-Behind Power Trowels

| Description                                         | Product Code  |
|-----------------------------------------------------|---------------|
| High quality vinyl engine cover with tie down hooks | FT203433-UNIT |



TROWEL BLADES AND PAN FLOATS

| Suits Model     | Combination Blade | Finishing Blade | Reversible Combination Wide Finishing Blade | Pan Float     |
|-----------------|-------------------|-----------------|---------------------------------------------|---------------|
| FP424-2         | N/A               | FT220455-UNIT   | N/A                                         | FT211766-UNIT |
| FP436-2, FP436D | FT220479-UNIT     | FT220414-UNIT   | N/A                                         | FT211691-UNIT |
| FP440-2         | FT220479-UNIT     | FT220414-UNIT   | N/A                                         | FT240PAN-UNIT |
| FP446-2         | FT220480-UNIT     | FT220410-UNIT   | FT2WX185-UNIT                               | FT211692-UNIT |

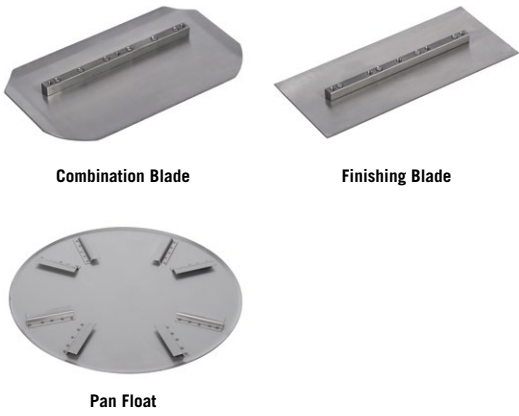

\*See the Trowel Blades and Pan Floats selection guide on pages 70 - 71.



MQ Whiteman Walk-Behind Power Trowels

The Edging Series of MQ Whiteman Walk-Behind Power Trowels are available in 24", 30" and 36" working widths. The quality J3036H55 enables the operator to finish tight to the wall without marking or marring and easily manoeuvre around obstacles.

The innovative and patented ABS plastic rotating ring resists concrete build and allows the operator to switch between 30" and 36" working widths, making this a truly versatile machine. Available with both standard knob style pitch or QuickPitch™ style controls for fast and precise blade adjustment.

This product is eligible for the Flextool Promise.

MORE POWER  
TO THE FLOOR

MQ WHITEMAN WALK-BEHIND  
POWER TROWELS

**Blade tilt system**

- Precise adjustment of blade
- Standard knob style pitch or QuickPitch™ (Standard knob style pitch featured in image)
- QuickPitch™ style control provides fast pitch mechanism for on the fly adjustment of blade angle

**Height adjustable padded handle**

Includes vibration dampening system for superior ergonomics and operator comfort  
(Handle ordered separately)

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Honda GX160 engine**

Provides hassle free operation and low engine emissions

**Sealed clutch and belt guard**

Protects against the ingress of unwanted materials that can prematurely wear out critical clutch components and V-belt

**Heavy-duty gearbox and spider**

- Robust and durable design for the toughest panning, floating and finishing applications
- Reduced maintenance and extended service life

**Convertible edge guard**

Change between 30" and 36" operating widths

J3036H55


POWERED by  
HONDA



MQ Whiteman Walk-Behind Power Trowels

The J and B Series of MQ Whiteman Walk-Behind Power Trowels are available in 36” and 46” working widths. Incorporating superior balance, durability, heavy-duty centrifugal clutch and your choice of standard knob style pitch or QuickPitch™ style control handles, this quality J36H90H provides contractors with the ideal machine for both residential and commercial construction work.

This product is eligible for the Flextool Promise.

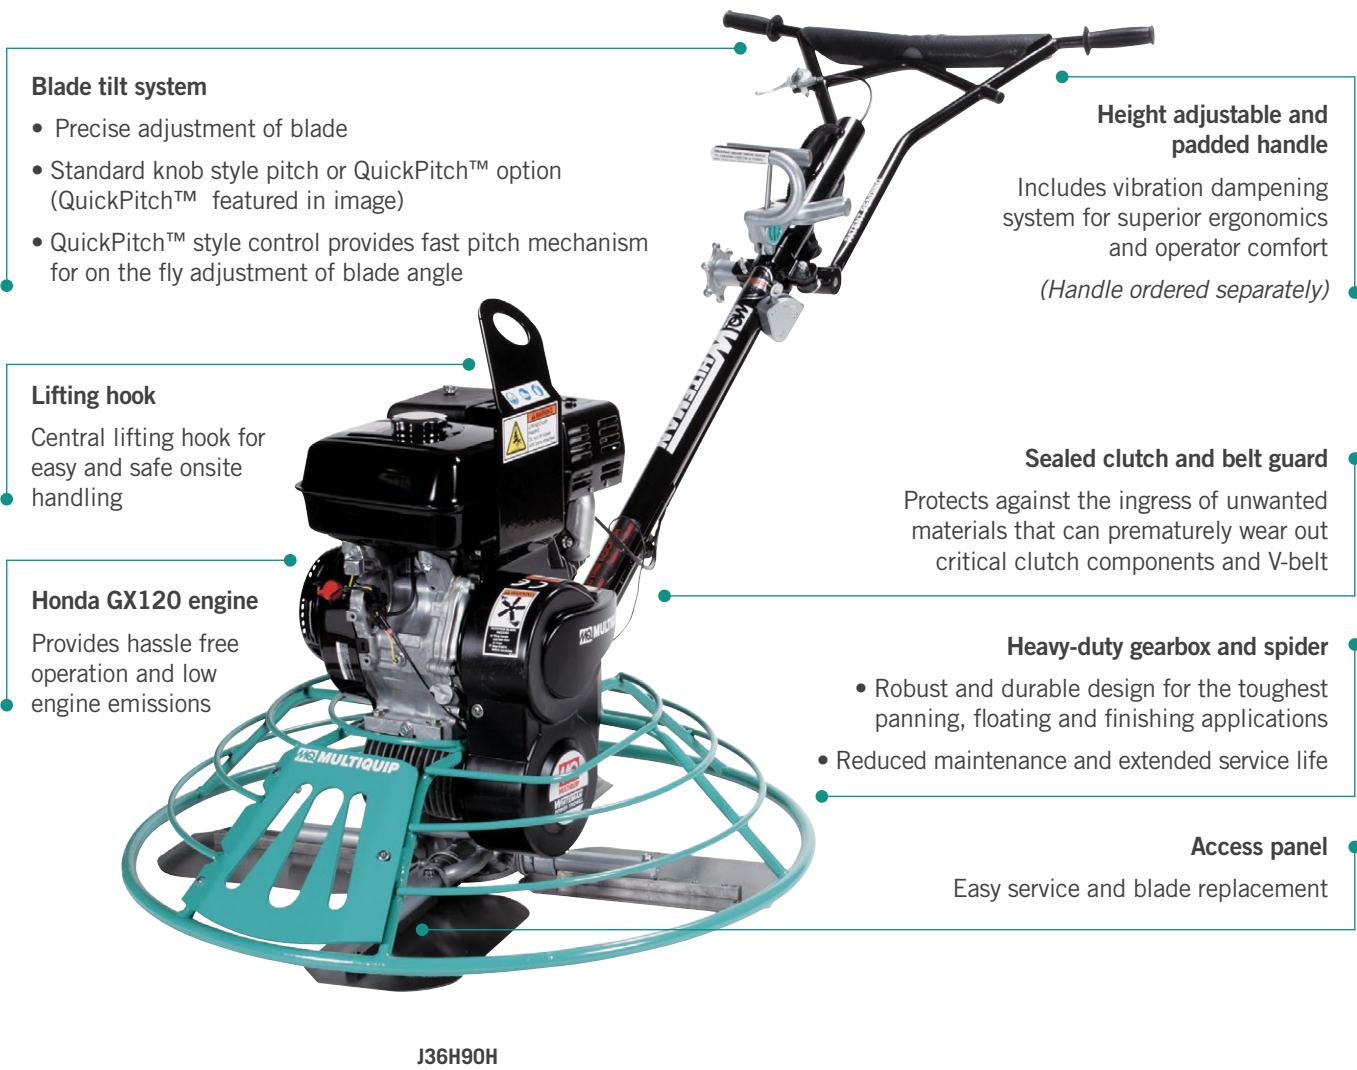

POWERED by  
**HONDA**

MQ WHITEMAN WALK-BEHIND POWER TROWELS



MQ Whiteman Walk-Behind Power Trowels are supplied **without** a handle and pan float. These should be ordered separately.

| Model     | Trowel Rotor Diameter mm (in) | Handle Type<br>(Handles ordered separately) | Operating Weight (kg) | Number of Blades | Speed Range (rpm) | Blade Pitch Max (deg) | Lifting Hook | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code<br>(Does not include handle) |
|-----------|-------------------------------|---------------------------------------------|-----------------------|------------------|-------------------|-----------------------|--------------|-------------|--------------|----------------------|-----------|-------------------------------------------|
| CA4HC     | 610 (24)                      | STHAC                                       | 65.50                 | 4                | 70-130            | 30                    | Yes          | Honda       | GX120        | 4                    | P         | FT269000-UNIT                             |
| J3036H55  | 760 (30)                      | SXH                                         | 76.25                 | 4                | 60-115            | 30                    | Yes          | Honda       | GX160        | 5.5                  | P         | FT269001-UNIT                             |
|           | 915 (36)                      | QXH                                         | 81.50                 |                  |                   |                       |              |             |              |                      |           |                                           |
| J36H55    | 915 (36)                      | SXH                                         | 83.00                 | 4                | 60-115            | 30                    | Yes          | Honda       | GX160        | 5.5                  | P         | FT269002-UNIT                             |
|           |                               | QXH                                         | 88.50                 |                  |                   |                       |              |             |              |                      |           |                                           |
| J36H90H   | 915 (36)                      | SXH                                         | 96.25                 | 4                | 90-155            | 30                    | Yes          | Honda       | GX270        | 9                    | P         | FT269003-UNIT                             |
|           |                               | QXH                                         | 101.50                |                  |                   |                       |              |             |              |                      |           |                                           |
| B46H11H   | 1165 (46)                     | SXH                                         | 120.25                | 4                | 90-155            | 30                    | Yes          | Honda       | GX340        | 11                   | P         | FT269004-UNIT                             |
|           |                               | QXH                                         | 124.75                |                  |                   |                       |              |             |              |                      |           |                                           |
| HDA48413H | 1220 (48)                     | QXHD                                        | 159.50                | 4                | 35-225            | 30                    | Yes          | Honda       | GX390        | 13                   | P         | FT269005-UNIT                             |

HANDLE OPTIONS (Sold separately)

| Model | Product Description                                          | Product Code  |
|-------|--------------------------------------------------------------|---------------|
| STHAC | Standard knob style pitch control for CA4HC                  | FT269006-UNIT |
| SXH   | Standard knob style pitch control for J and B Series trowels | FT269007-UNIT |
| QXH   | QuickPitch™ style control for J and B Series trowels         | FT269008-UNIT |
| QXHD  | QuickPitch™ style control for HDA48413H                      | FT269009-UNIT |



TROWEL BLADES AND PAN FLOATS

| Model                        | Combination Blade | Pan Float*    | Reversible Combination Wide Finishing Blade | Pan Float     |
|------------------------------|-------------------|---------------|---------------------------------------------|---------------|
| CA4HC                        | FT269020-UNIT     | FT269029-UNIT | N/A                                         | N/A           |
| J3036H55 (30" Configuration) | FT269021-UNIT     | FT269030-UNIT | N/A                                         | N/A           |
| J3036H55 (36" Configuration) | FT269022-UNIT     | FT269031-UNIT | N/A                                         | N/A           |
| J36H55                       | FT269023-UNIT     | FT269027-UNIT | FT269024-UNIT                               | FT269032-UNIT |
| J36H90H                      | FT269023-UNIT     | FT269027-UNIT | FT269024-UNIT                               | FT269032-UNIT |
| B46H11H                      | FT269025-UNIT     | FT269028-UNIT | FT269026-UNIT                               | FT269034-UNIT |
| HDA48413H                    | FT269025-UNIT     | FT269028-UNIT | FT269026-UNIT                               | FT269034-UNIT |

For further information and specifications please refer to the MQ Whiteman Trowel Blades and Pan Floats Technical Data Sheet.

\*See the Trowel Blades and Pan Floats selection guide on pages 72 - 73.

MQ Whiteman products are only available through authorised dealers in Australia. Go to [flextool.com.au/stockists](http://flextool.com.au/stockists) to find your nearest MQ Whiteman authorised dealer.



Flextool ProFinish®  
Ride-On Power Trowels

The Flextool ProFinish Ride-On Power Trowels are built for the professional contractor. Offering exceptional power-to-weight ratios, they are the ultimate force in tackling concrete pours of all sizes.

Fitted with precision engineered components including robust and durable spider plates, mechanical steering, and heavy-duty drive system, these machines ensure the perfect finish is achieved on each and every slab. Equipped with highly efficient gearboxes, maximum torque is transferred to the trowel rotors for superior performance at low, medium and high rpm.

Designed around operator experience, efficiency and durability, the Flextool ProFinish Ride-On Series 4 provides optimum balance and smooth operation, making it ideal for industrial and commercial projects.

This product is eligible for the Flextool Promise.

**Mechanical steering**

Twin-stick multi-directional levers provide improved feels and precise steering control

**Blade pitch degree gauge**

Visual gauge ensuring precise blade pitch degree on both rotors

**Vanguard 35 hp engine**

Reliable and high-performing to withstand the rigors and demands of panning, floating and finishing

**Front LED lights**

For low-light and indoor work

**Easy access frame design**

- Easy blade replacement
- Simplifies maintenance and offers convenient access to serviceable components

**Forklift pockets**

Integrated pockets for use with forklift

**High-back chair**

- Provides improved operator comfort
- Rear-mounted product manual holder
- Operator presence safety switch

**Double lifting points**

For easy, safe and balanced onsite handling

**Heavy-duty clutch and drive system**

Maintains optimum torque and speed during all phases of trowelling

**Tie-down points**

Four dedicated anchor points for enhanced safety during transport

**Heavy-duty gearbox and spider**

- Robust and durable design for the toughest panning, floating and finishing applications
- Reduced maintenance and extended service life



FP1046-4



FLEXTOOL PROFINISH® RIDE-ON POWER TROWELS



| Model    | Trowel Diameter mm (in) | Path width mm (in) | Operating Weight kg (lb) | Blades Per Rotor | Steering Type | Rotor Speed Range rpm | Blade Pitch Max deg | Fuel Tank Capacity L | Wheel Kit | Engine Make  | Engine Model | Max Rated Power hp | Fuel Type | Product Code  |
|----------|-------------------------|--------------------|--------------------------|------------------|---------------|-----------------------|---------------------|----------------------|-----------|--------------|--------------|--------------------|-----------|---------------|
| FP836-4  | 920 (36)                | 1910 (75)          | 292.5 (644)              | 4                | Mechanical    | 0-170                 | 25                  | 15                   | Yes       | Honda        | GX690        | 27                 | P         | FT220067-UNIT |
| FP1046-4 | 1160 (46)               | 2350 (92)          | 390.5 (861)              | 5                | Mechanical    | 0-170                 | 25                  | 19                   | Yes       | B&S Vanguard | 6134         | 35                 | P         | FT220068-UNIT |


WHEEL KIT (INCLUDED)

| Suits Model       | Description                                     | Product Code  |
|-------------------|-------------------------------------------------|---------------|
| FP836-4, FP1046-4 | Flextool Transport Wheel Assembly (Solid Wheel) | NPS02109-UNIT |
|                   | Flextool Transport Handle Assembly              | NPS02695-UNIT |



TROWEL BLADES AND PAN FLOATS

| Suits Model | Combination Blade | Finishing Blade | Reversible Combination Wide Finishing Blade | Pan Float     |
|-------------|-------------------|-----------------|---------------------------------------------|---------------|
| FP836-4     | FT220479-UNIT     | FT220414-UNIT   | N/A                                         | FT211691-UNIT |
| FP1046-4    | FT220480-UNIT     | FT220410-UNIT   | FT2WX185-UNIT                               | FT2H3505-UNIT |

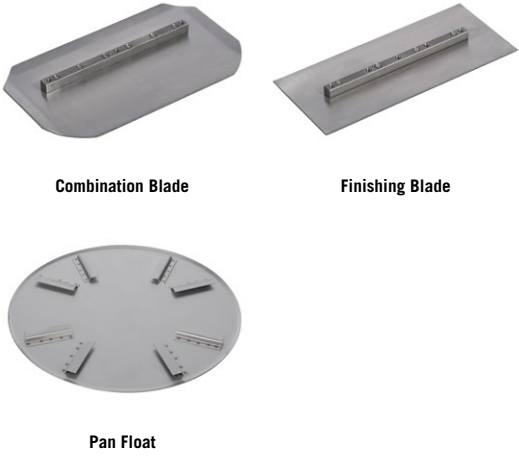

\*See the Trowel Blades and Pan Floats selection guide on pages 70-71.



# WHAT'S YOUR REPUTATION RIDING ON?

MQ WHITEMAN RIDE-ON  
POWER TROWELS





# MQ Whiteman Ride-On Power Trowels (Mechanical Drive)

The MQ Whiteman Mechanical Drive Ride-On Power Trowels are available in twin 36" and 46" models. Incorporating TwinPitch™ control, CVT drive system, durable gearboxes and constant-velocity joints, the Mechanical Drive Ride-On Power Trowels are designed to tackle a wide range of jobsite requirements and floor sizes.

This product is eligible for the Flextool Promise.

**Mechanical steering**  
Spring assisted for precise control and reduced fatigue

**B&S Vanguard 31 hp engine**  
High-performance to withstand the rigors of concrete finishing


**Heavy-duty CVT drive system**  
Constantly adjusts drive ratios to obtain torque and speed during all phases of operation

**LED lighting**  
For night-time and indoor work

**Mechanical gearboxes**  
Helical design for coolest running\*, trouble-free and superior operation

**Easy access frame design**  
Simplifies maintenance and offers convenient access to all serviceable components

**Heavy-duty spider plates**  
Features long-lasting wear plates and hubs that can be economically rebuilt

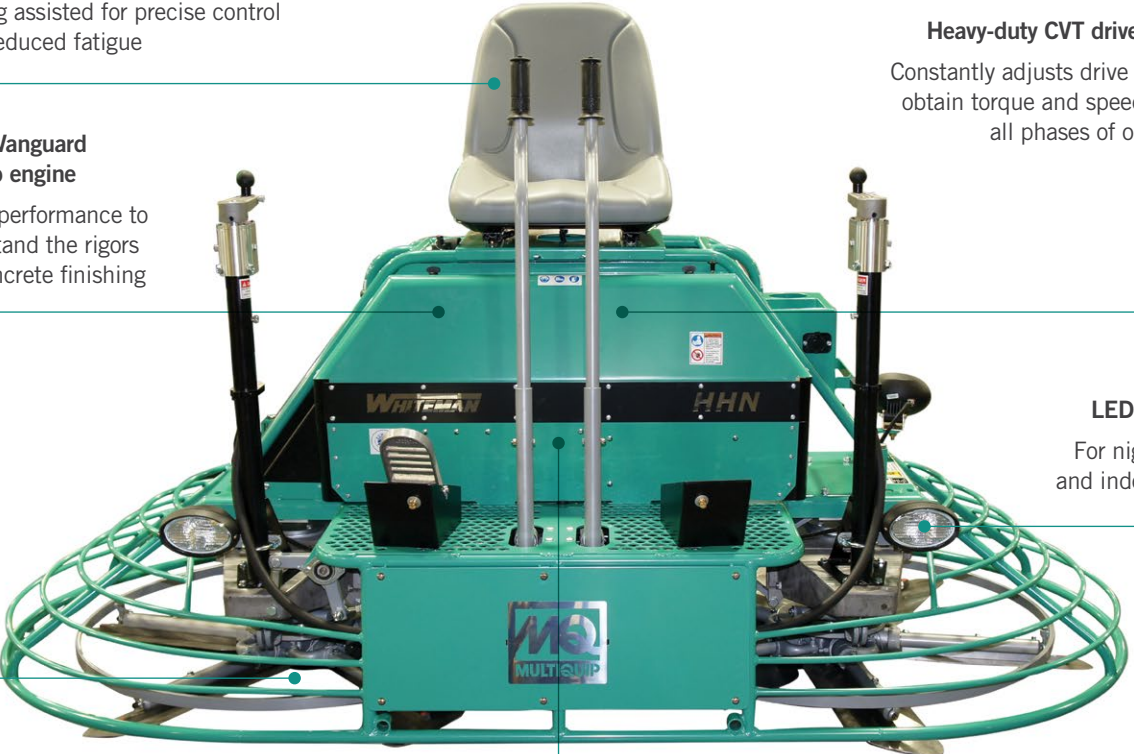

HHNG5



## MQ WHITEMAN RIDE-ON POWER TROWELS (MECHANICAL DRIVE)



|                                                |                                                 |
|------------------------------------------------|-------------------------------------------------|
| <b>JWN24HTCSL</b>                              | <b>HHNG5</b>                                    |
| <b>Trowel Rotor Diameter</b><br>915 mm (36 in) | <b>Trowel Rotor Diameter</b><br>1168 mm (46 in) |
| <b>Path Width</b><br>1905 mm (75 in)           | <b>Path Width</b><br>2335 mm (92 in)            |

| Model      | Operating Weight (kg) | Blades Per Rotor | Steering Type              | Speed Range (rpm) | Blade Pitch Max (deg) | Fuel Tank Capacity (L) | Wheel Kit Option | Engine Make & Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|------------|-----------------------|------------------|----------------------------|-------------------|-----------------------|------------------------|------------------|---------------------|----------------------|-----------|---------------|
| JWN24HTCSL | 355                   | 4                | Spring Assisted Mechanical | 40-180            | 30                    | 19                     | EMR2             | Honda GX690         | 24                   | P         | FT269011-UNIT |
| HHNG5      | 490                   | 5                | Spring Assisted Mechanical | 0-180             | 30                    | 26                     | EMR2 or EMR3     | B&S Vanguard 540000 | 35                   | P         | FT269012-UNIT |

### WHEEL KIT OPTIONS

| Model | Product Description                           | Product Code  |
|-------|-----------------------------------------------|---------------|
| EMR2  | Ride-on power trowel wheel transport kit EMR2 | FT269018-UNIT |
| EMR3  | Ride-on power trowel wheel transport kit EMR3 | FT269019-UNIT |



### TROWEL BLADES AND PAN FLOATS

| Model      | Combination Blade | Finishing Blade | Reversible Combination Wide Finishing Blade | Pan Float - Flat | Pan Float - Super Flat |
|------------|-------------------|-----------------|---------------------------------------------|------------------|------------------------|
| JWN24HTCSL | FT269023-UNIT     | FT269027-UNIT   | FT269024-UNIT                               | FT269032-UNIT    | FT269033-UNIT          |
| HHNG5      | FT269025-UNIT     | FT269028-UNIT   | FT269026-UNIT                               | FT269035-UNIT    | FT269036-UNIT          |


\*See the Trowel Blades and Pan Floats selection guide on pages 72 - 73.

MQ Whiteman products are only available through authorised dealers in Australia. Go to [flextool.com.au/stockists](http://flextool.com.au/stockists) to find your nearest MQ Whiteman authorised dealer.

# MQ Whiteman Ride-On Power Trowels (Hydrostatic Drive)

The MQ Whiteman MD82 is an 8-foot ride-on power trowel designed for performance with its powerful 57 hp Kubota dual-fuel (petrol/LPG) engine and hydrostatic drive. This next generation power trowel is robust in its design and downtime-reducing maintenance-friendly features, making it the ideal workhorse for contractors. With hydraulic steering, cruise control, and electric pitch adjustment, the MD82 ensures effortless operation and long-term durability. Maximum torque and lower PSI allow for earlier slab entry and extended finishing windows, providing greater flexibility and efficiency. Perfect for projects that demand high performance and minimal interruptions, the MD82 is built to exceed expectations on every job site.

This product is eligible for the Flextool Promise.

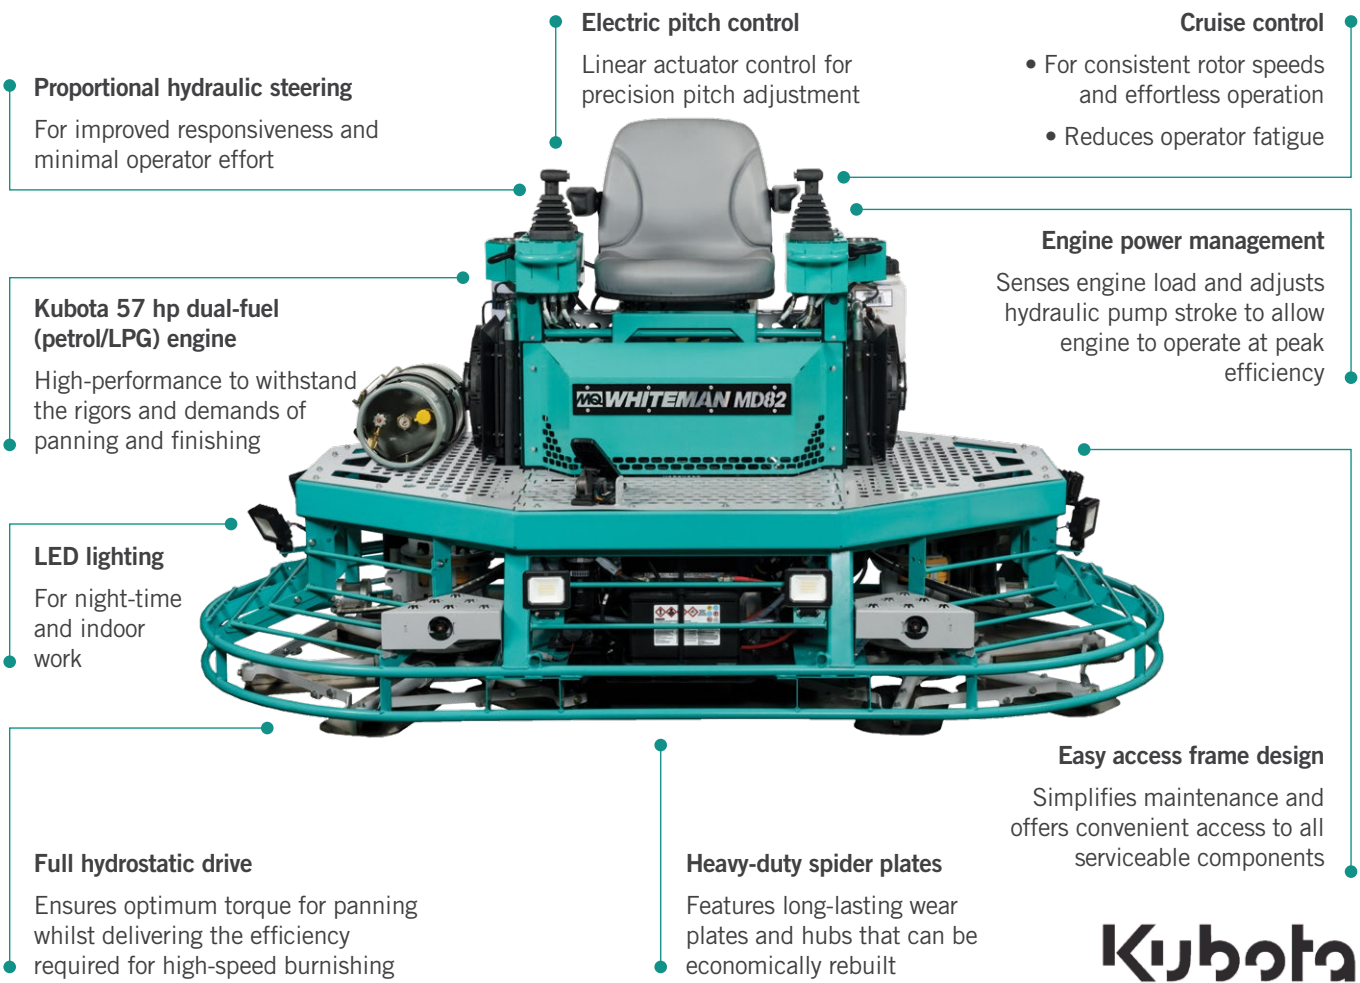


MD82



# MQ Whiteman Ride-On Power Trowels (Hydrostatic Drive)

The MQ Whiteman HTX6H is a heavy-duty, 8-foot ride-on power trowel designed to tackle the most demanding job sites. Featuring advanced joystick controls, a multi-function display screen, and proportional hydraulic steering, it offers operators unmatched precision and comfort. This model is built for durability and high-performance, with advanced power management ensuring exceptional floor flatness and productivity. Whether you're finishing large commercial projects or complex floors, the HTX6H is engineered to deliver outstanding results every time, making it a powerful choice for heavy-duty applications.

This product is eligible for the Flextool Promise.

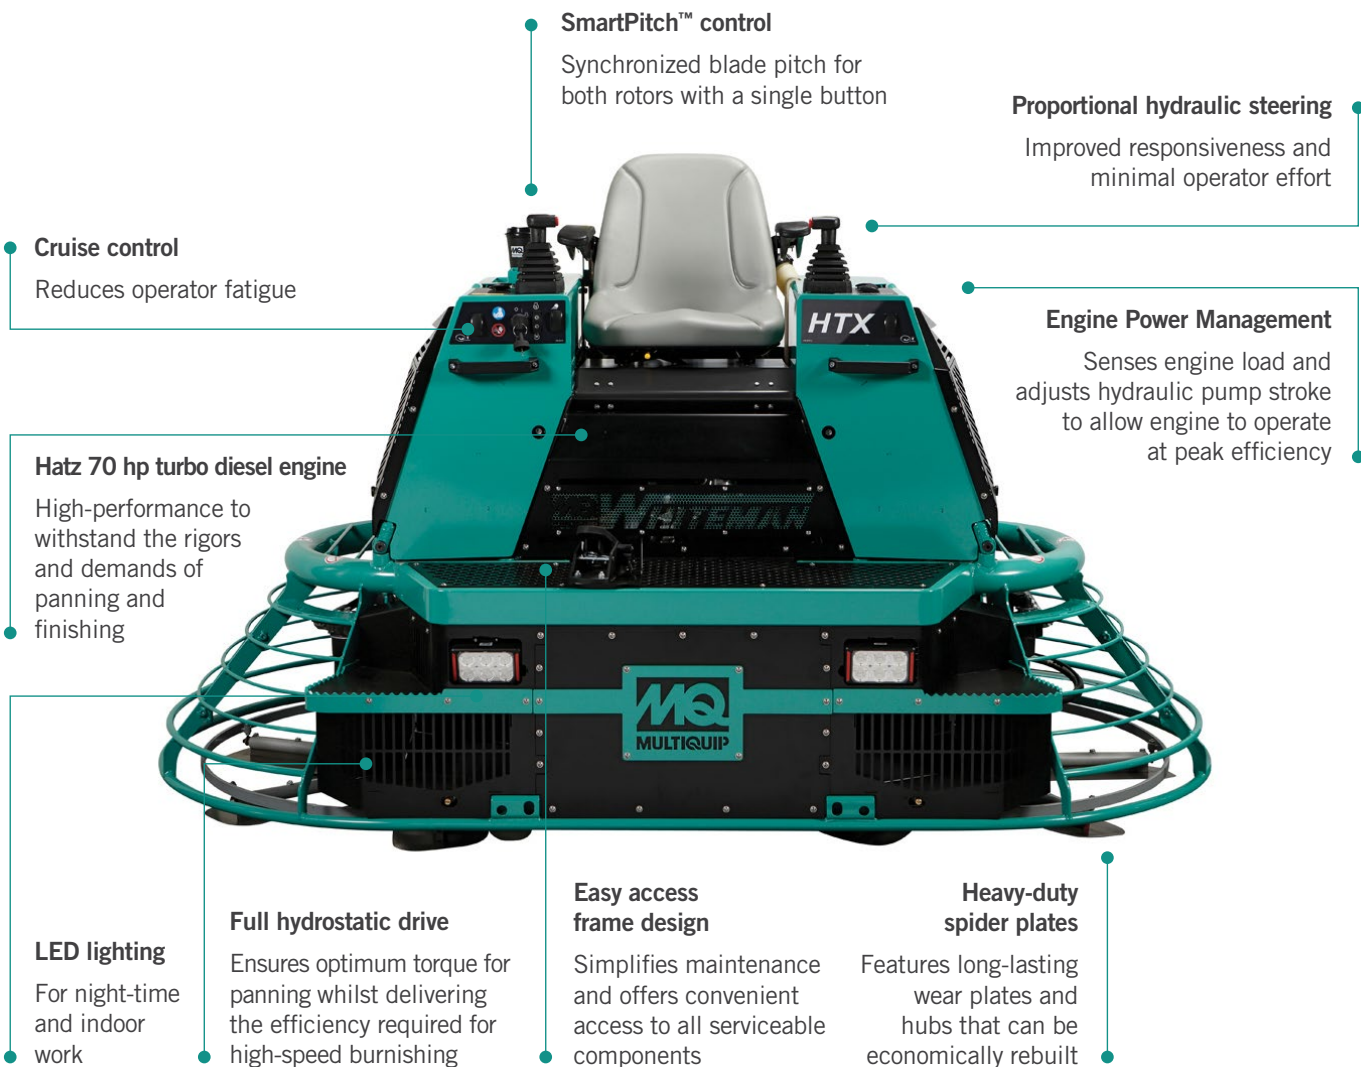

HTX6H





MQ WHITEMAN RIDE-ON POWER TROWELS (HYDROSTATIC DRIVE)



| Model | Trowel Rotor Diameter mm (in) | Path Width mm (in) | Operating Weight kg | Blades Per Rotor | Steering Type          | Speed Range rpm | Blade Pitch Max deg | Fuel Tank Capacity L | Wheel Kit Option | Engine Make  | Engine Model | Max Rated Power hp | Fuel Type | Product Code  |
|-------|-------------------------------|--------------------|---------------------|------------------|------------------------|-----------------|---------------------|----------------------|------------------|--------------|--------------|--------------------|-----------|---------------|
| LD60  | 915 (36)                      | 1905 (75)          | 386                 | 4                | Proportional Hydraulic | 0-140           | 30                  | 15                   | EMR2 or EMR3     | B&S Vanguard | 3864         | 23                 | P         | FT269067-UNIT |
| MD80  | 1168 (46)                     | 2310 (91)          | 690                 | 6                | Proportional Hydraulic | 0-160           | 30                  | 30                   | EMR3             | Vanguard     | 61G200       | 40                 | P         | FT269065-UNIT |
| MD82  | 1168 (46)                     | 2310 (91)          | 809                 | 6                | Proportional Hydraulic | 0-180           | 30                  | 34                   | EMR3             | Kubota       | WG1605       | 57                 | P / LPG   | FT269069-UNIT |
| MD105 | 1525 (60)                     | 2970 (117)         | 835                 | 6                | Proportional Hydraulic | 0-140           | 30                  | 76                   | EMR3             | Honda        | iGX800       | 2 x 25*            | P         | FT269066-UNIT |
| HTX6H | 1168 (46)                     | 2335 (92)          | 1020                | 6                | Proportional Hydraulic | 0-160           | 30                  | 37.85                | EMR3             | Hatz         | 4H50TIC      | 70                 | D         | FT269016-UNIT |
| STX6H | 1525 (60)                     | 2970 (117)         | 1135                | 6                | Proportional Hydraulic | 0-130           | 30                  | 75.75                | EMR3             | Hatz         | 4H50TIC      | 70                 | D         | FT269017-UNIT |

\*MD105 - Dual Engine power trowel

WHEEL KIT OPTIONS

| Model | Product Description                           | Product Code  |
|-------|-----------------------------------------------|---------------|
| EMR2  | Ride-on power trowel wheel transport kit EMR2 | FT269018-UNIT |
| EMR3  | Ride-on power trowel wheel transport kit EMR3 | FT269019-UNIT |



TROWEL BLADES AND PAN FLOATS

| Model | Combination Blade | Finishing Blade | Reversible Combination Wide Finishing Blade | Pan Float - Flat | Pan Float - Super Flat |
|-------|-------------------|-----------------|---------------------------------------------|------------------|------------------------|
| LD60  | FT269023-UNIT     | FT269027-UNIT   | FT269024-UNIT                               | FT269032-UNIT    | FT269033-UNIT          |
| MD80  | N/A               | N/A             | FT269058-UNIT                               | N/A              | FT269037-UNIT          |
| MD82  | N/A               | N/A             | FT269058-UNIT                               | N/A              | FT269037-UNIT          |
| MD105 | FT269054-UNIT     | FT269056-UNIT   | FT269055-UNIT                               | N/A              | FT269038-UNIT          |
| HTX6H | N/A               | N/A             | FT269058-UNIT                               | N/A              | FT269037-UNIT          |
| STX6H | FT269054-UNIT     | FT269056-UNIT   | FT269055-UNIT                               | N/A              | FT269038-UNIT          |

For further information and specifications please refer to the MQ Whiteman Trowel Blades and Pan Floats Technical Data Sheet.

\*See the Trowel Blades and Pan Floats selection guide on pages 72 - 73.

MQ Whiteman products are only available through authorised dealers in Australia. Go to [flextool.com.au/stockists](http://flextool.com.au/stockists) to find your nearest MQ Whiteman authorised dealer.

WHICH RIDER SUITS YOUR NEEDS BEST?



| Feature               | JWN24 Mechanical<br>Operating Weight: 355 kg<br>Rotor rpm: 40-180 | HHNG5 Mechanical<br>Operating Weight: 490 kg<br>Rotor rpm: 0-180 | LD60 Hydrostatic<br>Operating Weight: 386 kg<br>Rotor rpm: 0-140 | MD80 Hydrostatic<br>Operating Weight: 690 kg<br>Rotor rpm: 0-160 |
|-----------------------|-------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|
| Manoeuvrability       | • •                                                               | • •                                                              | • • •                                                            | • • •                                                            |
| Panning – Early Entry | •                                                                 | •                                                                | • • •                                                            | • • •                                                            |
| Panning – Tight/Black | •                                                                 | •                                                                | • •                                                              | • •                                                              |
| Blades – Combination  | • • •                                                             | • • •                                                            | • • •                                                            | • • •                                                            |
| Blades – Finish/Burn  | • • •                                                             | • • •                                                            | •                                                                | • •                                                              |
| Serviceability        | • •                                                               | • •                                                              | • • •                                                            | • • •                                                            |



| Feature               | MD82 Hydrostatic<br>Operating Weight: 809 kg<br>Rotor rpm: 0-180 | MD105 Hydrostatic<br>Operating Weight: 835 kg<br>Rotor rpm: 0-140 | HTX6H Hydrostatic<br>Operating Weight: 1020 kg<br>Rotor rpm: 0-160 | STX6H Hydrostatic<br>Operating Weight: 1135 kg<br>Rotor rpm: 0-130 |
|-----------------------|------------------------------------------------------------------|-------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Manoeuvrability       | • • •                                                            | • • •                                                             | • • •                                                              | • • •                                                              |
| Panning – Early Entry | • •                                                              | • • •                                                             | •                                                                  | •                                                                  |
| Panning – Tight/Black | • • •                                                            | • •                                                               | • • •                                                              | • • •                                                              |
| Blades – Combination  | • • •                                                            | • •                                                               | • • •                                                              | • •                                                                |
| Blades – Finish/Burn  | • • •                                                            | • •                                                               | • • •                                                              | • •                                                                |
| Serviceability        | • • •                                                            | • • •                                                             | •                                                                  | •                                                                  |

Key to understanding the comparison:

- (1 dot): **Good** – Suitable for lighter tasks and basic performance.
- • (2 dots): **Great** – Handles medium-duty tasks with more advanced features.
- • • (3 dots): **Best** – Ideal for heavy-duty applications with top-tier performance and minimal downtime.

# Flextool Series Trowel Blades and Pan Floats

## TROWEL BLADE AND PAN FLOAT SPECIFICATIONS FINISHING AND COMBINATION BLADES

Finishing blades are designed to produce a smooth and polished finish to the concrete surface. After the slab has firmed up, blade pitch is increased to a greater angle resulting in a smooth and polished finish.

Combination blades are designed for operators who wish to use one blade for both floating and finishing applications. During the initial stages of power trowelling the blade is set flat and is used for floating, as the slab firms up the blade pitch is increased to produce a smooth finish.



### TROWEL BLADES

| Machine Model Compatibility       | Rotor Diameter inch (mm) | Blades Per Rotor | Product Code  | Product Description                   | Blade Size (mm) | Blade Size (in) | Blade Weight (kg) | Blades Per Pack |  |  |
|-----------------------------------|--------------------------|------------------|---------------|---------------------------------------|-----------------|-----------------|-------------------|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| FP424-2                           | 24 (610)                 | 4                | FT220455-UNIT | Trowel Blade Finishing 120 x 230      | 120 x 230       | 4.75 x 9        | 2.20              | 4               | ✓                                                                                   | ✗                                                                                   |
| PortaTrowel FPT30                 | 30 (760)                 | 4                | FT201533-UNIT | Trowel Blade Combination 150 x 265    | 150 x 265       | 6 x 10.5        | 1.90              | 4               | ✓                                                                                   | ✗                                                                                   |
| FT34-2                            | 34 (865)                 | 4                | FT201823-UNIT | Trowel Blade Finishing 150 x 325      | 150 x 325       | 6 x 12.75       | 4.70              | 4               | ✓                                                                                   | ✗                                                                                   |
|                                   |                          | 4                | FT201821-UNIT | Trowel Blade Combination 185 x 322    | 185 x 322       | 7.25 x 12.50    | 7.20              | 4               | ✓                                                                                   | ✗                                                                                   |
| FP436-2, FP436D, FP440-2, FP836-4 | 36 (915)                 | 4                | FT220414-UNIT | Trowel Blade Finishing 152 x 355      | 152 x 355       | 6 x 14          | 4.80              | 4               | ✓                                                                                   | ✓                                                                                   |
|                                   |                          | 4                | FT220479-UNIT | Trowel Blade Combination 205 x 355    | 205 x 355       | 8 x 14          | 6.00              | 4               | ✓                                                                                   | ✓                                                                                   |
| FT40-2                            | 40 (1015)                | 4                | FT201824-UNIT | Trowel Blade Finishing 150 x 375      | 150 x 375       | 6x 14.75        | 5.90              | 4               | ✓                                                                                   | ✗                                                                                   |
|                                   |                          | 4                | FT201822-UNIT | Trowel Blade Combination 196 x 370    | 195 x 370       | 7.75 x 14.50    | 8.30              | 4               | ✓                                                                                   | ✗                                                                                   |
| FP446-2, FP1046-4                 | 46 (1165)                | 4                | FT220410-UNIT | Trowel Blade Finishing 152 x 460      | 152 x 460       | 6 x 8           | 6.20              | 4               | ✓                                                                                   | ✓                                                                                   |
|                                   |                          | 4                | FT220480-UNIT | Trowel Blade Combination 205 x 455    | 205 x 455       | 8 x 18          | 8.00              | 4               | ✓                                                                                   | ✓                                                                                   |
|                                   |                          | 5                | FT2WX185-UNIT | Trowel Blade Wide Finishing 210 x 460 | 210 x 460       | 8 x 18          | 12.75             | 5               | ✓                                                                                   | ✓                                                                                   |

### PAN FLOATS

Flextool Pan Floats are designed to clip onto both finishing or combination blades. Pan floats, with their large surface area, achieve flatter floors than traditional float blades as they are more efficient in removing imperfections, bumps and voids.



| Machine Model Compatibility | Rotor Diameter inch (mm) | Blades Per Rotor | Product Code  | Product Description                   | Pan Float Size (mm) | Pan Float Size (in) | Pan Float Weight (kg) |  |  |
|-----------------------------|--------------------------|------------------|---------------|---------------------------------------|---------------------|---------------------|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| FP424-2                     | 24 (610)                 | 4                | FT211766-UNIT | Pan Float Standard (24") 4 Blade Clip | 605                 | 24                  | 5.00                  | ✓                                                                                   | ✗                                                                                   |
| FP436-2, FP436D, FP836-4    | 36 (915)                 | 4                | FT211691-UNIT | Pan Float Standard (37") 4 Blade Clip | 940                 | 37                  | 17.60                 | ✓                                                                                   | ✓                                                                                   |
| FP440-2                     | 40 (1015)                | 4                | FT240PAN-UNIT | Pan Float Standard (41") 4 Blade Clip | 1050                | 41.25               | 23.30                 | ✓                                                                                   | ✗                                                                                   |
| FP446-2                     | 46 (1165)                | 4                | FT211692-UNIT | Pan Float Standard (48") 4 Blade Clip | 1230                | 48.5                | 29.40                 | ✓                                                                                   | ✓                                                                                   |
| FP1046-4                    | 46 (1165)                | 5                | FT2H3505-UNIT | Pan Float Standard (46") 5 Blade Pin  | 1175                | 46.25               | 30.00                 | ✗                                                                                   | ✓                                                                                   |
|                             |                          | 5                | FT25FLAT-UNIT | Pan Float Flat (46") 5 Blade Pin      | 1175                | 46.25               | 30.00                 | ✗                                                                                   | ✓                                                                                   |

# Kraft Tool Co. Series Trowel Blades



## ORANGE THUNDER TROWEL BLADES

Kraft Tool Co Orange Thunder Trowel Blades are designed for finishing concrete projects with walk-behind power trowel machines. Made from advanced, lightweight KO-20™ technology, these blades provide even coverage and do not leave burnish marks. The KO-20™ material is impact resistant for extended wear and the blade won't absorb liquids preventing corrosion and rust, and making them easy to clean. Suitable for use with various brand's walk-behind power trowels, these blades are a popular choice for polished and decorative concrete.

| Machine Model Compatibility                                            | Blade Model Number | Product Description                     | Blade Size (mm) | Blade Size (in) | Blade Weight (kg) | Blades Per Pack |  |  | Product Code  |
|------------------------------------------------------------------------|--------------------|-----------------------------------------|-----------------|-----------------|-------------------|-----------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|
| Flextool<br>FP436-2, FP436D, FP440-2<br>MQ Whiteman<br>J36H55, J36H90H | SK100-OT           | Orange Thunder Trowel Blade - Finishing | 355 x 150       | 14 x 6          | 4.0               | 4               | ✓                                                                                     | ✗                                                                                     | FT4K0113-UNIT |
| Flextool<br>FP446-2<br>MQ Whiteman<br>B46H11H, HDA48413H               | SK214-OT           | Orange Thunder Trowel Blade - Finishing | 455 x 150       | 18 x 6          | 5.28              | 4               | ✓                                                                                     | ✗                                                                                     | FT4K0114-UNIT |



# MQ Whiteman Series Trowel Blades and Pan Floats

## TROWEL BLADE AND PAN FLOAT SPECIFICATIONS FINISHING AND COMBINATION BLADES

MQ Whiteman Trowel Blades are manufactured to the highest standard with premium quality materials for optimum trowelling results.

The MQ Whiteman steel trowel blades feature a superior torque flex steel, providing the most wear-resistant, high-performance trowel blades. These trowel blades are extremely hard wearing and durable, resulting in longer operating life and less blade-change downtime.

Finishing blades are designed to produce a smooth and polished finish to the concrete surface. After the slab has firmed up, blade pitch is increased to a greater angle resulting in a smooth and polished finish.

Combination blades are designed for operators who wish to use one blade for both floating and finishing applications. During the initial stages of power trowelling the blade is set flat and is used for floating, as the slab firms up the blade pitch is increased to produce a smooth finish.

| Machine Model Compatibility         | Blade Model Number | Product Description                                               | Blade Size (mm) | Blade Size (in) | Blade Weight (kg) | Blades Per Pack |  |  | Product Code  |
|-------------------------------------|--------------------|-------------------------------------------------------------------|-----------------|-----------------|-------------------|-----------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| CA4HC                               | C244               | Trowel Blade Combination 5 x 9.25 (24") Edger                     | 125 x 235       | 5 x 9.25        | 3                 | 4               | ✓                                                                                   | ✗                                                                                   | FT269020-UNIT |
| J3036H55                            | 30698              | Trowel Blade Combination 8 x 10.5 (30") Edger                     | 205 x 265       | 8 x 10.5        | 4.5               | 4               | ✓                                                                                   | ✗                                                                                   | FT269021-UNIT |
|                                     | 30699              | Trowel Blade Combination 8 x 14 (36") Edger                       | 205 x 355       | 8 x 14          | 6                 | 4               |                                                                                     |                                                                                     | FT269022-UNIT |
| J36H55, J36H90H<br>JWN24HTCSL, LD60 | C844               | Trowel Blade Combination 8 x 14 (36")                             | 205 x 355       | 8 x 14          | 6.25              | 4               | ✓                                                                                   | ✓                                                                                   | FT269023-UNIT |
|                                     | RC814              | Trowel Blade Combination 8 x 14 (36") Reversible (Wide Finishing) | 205 x 355       | 8 x 14          | 7.5               | 4               |                                                                                     |                                                                                     | FT269024-UNIT |
|                                     | F900               | Trowel Blade Finishing 6 x 14 (36")                               | 152 x 355       | 6 x 14          | 5.2               | 4               |                                                                                     |                                                                                     | FT269027-UNIT |
| B46H11H,<br>HDA48413H<br>HHNG5      | C464               | Trowel Blade Combination 8 x 18 (46")                             | 205 x 455       | 8 x 18          | 8.25              | 4               | ✓                                                                                   | ✓                                                                                   | FT269025-UNIT |
|                                     | RC818              | Trowel Blade Combination 8 x 18 (46") Reversible (Wide Finishing) | 205 x 455       | 8 x 18          | 9.5               | 4               |                                                                                     |                                                                                     | FT269026-UNIT |
|                                     | F400               | Trowel Blade Finishing 6 x 18 (46")                               | 152 x 455       | 6 x 18          | 6.75              | 4               |                                                                                     |                                                                                     | FT269028-UNIT |
| MD80, MD82,<br>HTX6H                | C8160              | Trowel Blade Combination 8 x 16 (46") Reversible (Wide Finishing) | 205 x 405       | 8 x 16          | 8.45              | 4               | ✗                                                                                   | ✓                                                                                   | FT269058-UNIT |
| MD105, STX6H                        | C11997             | Trowel Blade Combination 8 x 23 (60")                             | 205 x 585       | 8 x 23          | 10.55             | 4               | ✗                                                                                   | ✓                                                                                   | FT269054-UNIT |
|                                     | RC823              | Trowel Blade Combination 8 x 23 (60") Reversible (Wide Finishing) | 205 x 585       | 8 x 23          | 12.25             | 4               |                                                                                     |                                                                                     | FT269055-UNIT |
|                                     | F11990             | Trowel Blade Finishing 6 x 23 (60")                               | 152 x 585       | 6 x 23          | 8.75              | 4               |                                                                                     |                                                                                     | FT269056-UNIT |

MQ Whiteman products are only available through authorised dealers in Australia. Go to [flextool.com.au/stockists](https://flextool.com.au/stockists) to find your nearest MQ Whiteman authorised dealer.



## PAN FLOATS

MQ Whiteman Pan Floats are manufactured to the highest standard with premium quality materials for optimum floating results.

The MQ Whiteman Pan Floats feature a superior steel, providing the most wear-resistant, high-performance pan floats. These pan floats are extremely hard wearing and durable, resulting in longer operating life. MQ Whiteman Pan Floats attach onto both finishing and combination blades to create a larger surface area to flatten floors more efficiently, removing any imperfections, bumps and voids.

They are available in two different styles; Flat configuration for use on Walk-Behind Power Trowels and Super Flat for use on Ride-On Power Trowels.

| Machine Model Compatibility         | Pan Float Model Number | Product Description                    | Pan Float Size (mm) | Pan Float Size (in) | Pan Float Weight (kg) |  |  | Product Code  |
|-------------------------------------|------------------------|----------------------------------------|---------------------|---------------------|-----------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| CA4HC                               | 21550                  | Pan Float Flat (24") Edger 4-Blade     | 610                 | 24                  | 5                     | ✓                                                                                   | ✗                                                                                   | FT269029-UNIT |
| J3036H55                            | 30696                  | Pan Float Flat (30") Edger 4-Blade     | 765                 | 30                  | 13.5                  | ✓                                                                                   | ✗                                                                                   | FT269030-UNIT |
|                                     | 30697                  | Pan Float Flat (36") Edger 4-Blade     | 915                 | 36                  | 19                    |                                                                                     |                                                                                     | FT269031-UNIT |
| J36H55, J36H90H<br>JWN24HTCSL, LD60 | 2870                   | Pan Float Flat (36") Pin 4-Blade       | 915                 | 36                  | 19                    | ✓                                                                                   | ✓                                                                                   | FT269032-UNIT |
| JWN24HTCSL, LD60                    | 11032                  | Pan Float Super Flat (36") Pin 4-Blade | 915                 | 36                  | 19                    | ✗                                                                                   | ✓                                                                                   | FT269033-UNIT |
| B46H11H,<br>HDA48413H               | 12271                  | Pan Float Flat (46") Pin 4-Blade       | 1170                | 46                  | 28.5                  | ✓                                                                                   | ✗                                                                                   | FT269034-UNIT |
| HHNG5                               | 12272                  | Pan Float Flat (46") Pin 5-Blade       | 1170                | 46                  | 29                    | ✗                                                                                   | ✓                                                                                   | FT269035-UNIT |
|                                     | 12093W                 | Pan Float Super Flat (46") Pin 5-Blade | 1170                | 46                  | 30.25                 |                                                                                     |                                                                                     | FT269036-UNIT |
| MD80, MD82,<br>HTX6H                | 32608W                 | Pan Float Super Flat (46") Pin 6-Blade | 1170                | 46                  | 28                    | ✗                                                                                   | ✓                                                                                   | FT269037-UNIT |
| MD105, STX6H                        | 11979E                 | Pan Float Super Flat (60") Pin 6-Blade | 1525                | 60                  | 52.25                 | ✗                                                                                   | ✓                                                                                   | FT269038-UNIT |



# CONCRETE HAND TOOLS

## MARBLE SHEEN (POOL) TROWELS

Marble Sheen trowels offer maximum blade flexibility due to their short blade support spine, developed initially for finishing swimming pools these tools can be used in a wide range of applications where a curved finish is required. Constructed using super flexible high carbon steel and available with ProSoft rubber handle for user comfort.

| Description                                   | Width mm | Length mm | Spine Length mm | Pack Qty | Product Code  |
|-----------------------------------------------|----------|-----------|-----------------|----------|---------------|
| Flextool Marble Sheen Trowel - ProSoft Handle | 100      | 350       | 160             | 6        | FT4P1021-UNIT |
| Flextool Marble Sheen Trowel - ProSoft Handle | 100      | 450       | 160             | 6        | FT4P1022-UNIT |



## SQUARE TROWELS

Square trowels are used where pointed trowels are not suitable and for general concrete work. Suitable for use on concrete stairs and other vertical applications. Flextool square trowels are produced using high carbon steel to optimise blade flexibility and durability. Flextool square trowels are also fitted with a single piece forged aluminium spine for extra strength and blade support. Available with ProSoft rubber grip handles in both closed and open style configurations.

| Description                             | Width mm | Length mm | Pack Qty | Product Code  |
|-----------------------------------------|----------|-----------|----------|---------------|
| Flextool Square Trowel - ProSoft Handle | 120      | 280       | 6        | FT4P1002-UNIT |
| Flextool Square Trowel - ProSoft Handle | 115      | 405       | 6        | FT4P1081-UNIT |



|                                              |     |     |   |               |
|----------------------------------------------|-----|-----|---|---------------|
| Flextool Square Trowel - ProSoft Open Handle | 120 | 280 | 6 | FT410020-UNIT |
| Flextool Square Trowel - ProSoft Open Handle | 115 | 405 | 6 | FT410810-UNIT |

## POINTED TROWELS

Pointed trowels are used for trowelling concrete floors and other general concrete work. The pointed nose of the trowel provides flexibility when trowelling around corners and protrusions in the concrete whilst also reducing marks left in the concrete. Flextool pointed trowels are produced using high carbon steel to optimise blade flexibility and durability. Flextool pointed trowels are also fitted with a single piece forged aluminium spine for extra strength and blade support. Available in both ProSoft rubber grip and solid moulded plastic handles.

| Description                              | Width mm | Length mm | Pack Qty | Product Code  |
|------------------------------------------|----------|-----------|----------|---------------|
| Flextool Pointed Trowel - Plastic Handle | 100      | 355       | 6        | FT4P1009-UNIT |
| Flextool Pointed Trowel - Plastic Handle | 120      | 365       | 6        | FT4P1001-UNIT |
| Flextool Pointed Trowel - Plastic Handle | 115      | 405       | 6        | FT4P1091-UNIT |
| Flextool Pointed Trowel - Plastic Handle | 115      | 450       | 6        | FT4P1092-UNIT |
| Flextool Pointed Trowel - Plastic Handle | 115      | 500       | 6        | FT4P1093-UNIT |
| Flextool Pointed Trowel - Plastic Handle | 100      | 355       | 6        | FT41009P-UNIT |
| Flextool Pointed Trowel - Plastic Handle | 115      | 405       | 6        | FT41091P-UNIT |



## STEEL FLOATS

Steel Floats or “Sides Up” trowels as they are sometimes referred to are used for creating a non-slip finish on the concrete surface, also known as a stippled or coved finish. They are also used for trowelling dry shake materials into the top surface of the concrete. Steel floats produce a finer texture to wood floats and are more durable and longer wearing due to their solid steel blade. Available with ProSoft rubber handle for user comfort.

| Description                                     | Width mm | Length mm | Pack Qty | Product Code  |
|-------------------------------------------------|----------|-----------|----------|---------------|
| Flextool Stainless Steel Float - ProSoft Handle | 160      | 210       | 6        | FT42009S-UNIT |
| Flextool Stainless Steel Float - ProSoft Handle | 100      | 290       | 6        | FT42029S-UNIT |
| Flextool Stainless Steel Float - ProSoft Handle | 150      | 380       | 6        | FT42019S-UNIT |





WOOD FLOATS

Wood Floats are used for creating a rough non-slip or textured finish on the concrete surface. Used predominately for outdoor areas such as footpaths and other pedestrian traffic applications. Available with ProSoft rubber handle for user comfort.

| Description                          | Width mm | Length mm | Pack Qty | Product Code  |
|--------------------------------------|----------|-----------|----------|---------------|
| Flextool Wood Float - ProSoft Handle | 65       | 600       | 6        | FT4P8024-UNIT |

MAGNESIUM FLOATS

Magnesium Floats are used in the early stages of concrete placement for working the concrete and bringing moisture to the surface. They can also be used again in the late stages of concrete finishing to create a fine textured finish similar to a steel or wood float. All Flextool magnesium floats are produced with a broken-in or curved blade and come standard with a ProSoft rubber grip for user comfort.

| Description                               | Width mm | Length mm | Pack Qty | Product Code  |
|-------------------------------------------|----------|-----------|----------|---------------|
| Flextool Magnesium Float - ProSoft Handle | 80       | 405       | 6        | FT4P2051-UNIT |
| Flextool Magnesium Float - ProSoft Handle | 80       | 510       | 6        | FT4P2052-UNIT |

VEE JOINTERS - STEEL

Vee Jointer steel trowels are used to control shrinking and cracking of concrete by inducing cracks to occur at the desired position and in a straight line. Available in ProSoft handle for user comfort.

| Description                           | Width mm | Length mm | Depth mm | Pack Qty | Product Code  |
|---------------------------------------|----------|-----------|----------|----------|---------------|
| Flextool Vee Jointer - ProSoft Handle | 75       | 152       | 10       | 6        | FT43001S-UNIT |
| Flextool Vee Jointer - ProSoft Handle | 150      | 175       | 12       | 6        | FT43002S-UNIT |
| Flextool Vee Jointer - ProSoft Handle | 150      | 175       | 20       | 6        | FT43012S-UNIT |

CONCRETE EDGERS - BEVEL

Concrete Edger trowels are used to create a smooth finish to slab edges. Available with ProSoft handle for user comfort.

| Description                     | Width mm | Length mm | Angle | Bevel mm | Pack Qty | Product Code  |
|---------------------------------|----------|-----------|-------|----------|----------|---------------|
| Flextool Edger - ProSoft Handle | 100      | 150       | 45    | 25       | 6        | FT44013S-UNIT |

CONCRETE EDGERS - BULL NOSE

Concrete Edger Bull Nose trowels are used to create a smooth finish to slab edges. They produce a curved profile finish on the concrete edge to prevent chipping and damage to the concrete. Available with ProSoft handle for user comfort.

| Description                     | Width mm | Length mm | Radius mm | Depth mm | Pack Qty | Product Code  |
|---------------------------------|----------|-----------|-----------|----------|----------|---------------|
| Flextool Edger - ProSoft Handle | 75       | 140       | 5         | 12       | 6        | FT44001S-UNIT |
| Flextool Edger - ProSoft Handle | 75       | 140       | 6         | 12       | 6        | FT44002S-UNIT |
| Flextool Edger - ProSoft Handle | 75       | 140       | 10        | 19       | 6        | FT44003S-UNIT |
| Flextool Edger - ProSoft Handle | 75       | 140       | 19        | 19       | 6        | FT44008S-UNIT |
| Flextool Edger - ProSoft Handle | 100      | 150       | 6         | 14       | 6        | FT44006S-UNIT |
| Flextool Edger - ProSoft Handle | 105      | 150       | 10        | 14       | 6        | FT47006S-UNIT |
| Flextool Edger - ProSoft Handle | 112      | 175       | 12        | 22       | 6        | FT47002S-UNIT |
| Flextool Edger - ProSoft Handle | 112      | 175       | 25        | 19       | 6        | FT47003S-UNIT |
| Flextool Edger - ProSoft Handle | 140      | 200       | 20        | 19       | 6        | FT47008S-UNIT |
| Flextool Edger - ProSoft Handle | 150      | 230       | 25        | 24       | 6        | FT47001S-UNIT |



CONCRETE SCREED WITH LEVEL VIAL

Flextool Concrete Screeds are made from durable yet lightweight aluminium extrusions. Concrete screeds are used to level the concrete after it has been placed. Flextool screeds are designed with dual cutting edges and clamped handles allowing the screed to be reversed for use on the other side. These screeds are fitted with a level vial to assist with accurate and level screeding, and they are also fitted with plastic end caps and are powder coated for easy cleaning.

| Description                        | Length mm | Pack Qty | Product Code  |
|------------------------------------|-----------|----------|---------------|
| Flextool Aluminium Concrete Screed | 1200      | 4        | FT401807-UNIT |
| Flextool Aluminium Concrete Screed | 1500      | 4        | FT401808-UNIT |
| Flextool Aluminium Concrete Screed | 1800      | 4        | FT401809-UNIT |
| Flextool Aluminium Concrete Screed | 2100      | 4        | FT401810-UNIT |
| Flextool Aluminium Concrete Screed | 2400      | 4        | FT401811-UNIT |
| Flextool Aluminium Concrete Screed | 2700      | 4        | FT401812-UNIT |
| Flextool Aluminium Concrete Screed | 3000      | 4        | FT401813-UNIT |
| Flextool Aluminium Concrete Screed | 3600      | 4        | FT401814-UNIT |
| Flextool Aluminium Concrete Screed | 4200      | 4        | FT401815-UNIT |



WALKING TOOLS

Flextool Walking Tools range include Steel Float, Edger and Vee Jointer.

Flextool Steel Float is designed to create a non-slip finish on the concrete surface, also known as a stippled or coved finish, which is common in outdoor paving. It produces a finer texture than wood floats, and is more durable and longer wearing due to its stainless-steel blade. A steel float is sometimes referred to as a 'Sides Up' trowel, due to the steel blade that is turned up all round the edges. Flextool Steel Float can also be used for trowelling dry shake materials into the top surface of the concrete. Flextool Walking Tool Steel Float should be used with Telescopic Extension or Clip-Together Handle.

Flextool Walking Tool Concrete Edger is designed to easily create a smooth finish to the edges of a concrete slab. Used on patios, kerbs, pavements and driveways, it will produce a tighter, cleaner, curved profile finish on the concrete edge to prevent future chipping and damage. Flextool Walking Tool Concrete Edger is made of stainless steel and should be used with Telescopic Extension or Clip-Together Handle.

Flextool Walking Tool Vee Jointer is a stainless-steel trowel used to control shrinking and cracking of concrete. It allows the user to induce cracks or 'dummy joints' to occur at the desired position, and in a straight line. Flextool Walking Tool Vee Jointer should be used with Telescopic Extension or Clip-Together Handle.

| Description                         | Width mm | Length mm | Radius mm | Depth mm | Pack Qty | Product Code  |
|-------------------------------------|----------|-----------|-----------|----------|----------|---------------|
| Flextool Walking Tool – Steel Float | 160      | 210       | N/A       | N/A      | 6        | FT4009SW-UNIT |
| Flextool Walking Tool – Steel Float | 150      | 380       | N/A       | N/A      | 6        | FT4019SW-UNIT |
| Flextool Walking Tool – Edger       | 112      | 175       | 12        | 22       | 6        | FT4002SW-UNIT |
| Flextool Walking Tool – Vee Jointer | 150      | 175       | N/A       | 12       | 6        | FT4702SW-UNIT |



BULLFLOATS

Flextool Aluminium Bullfloats are used for smoothing the surface of concrete prior to it setting. These bullfloats to be used with Flextool Telescopic or Clip-Together Handles.

| Description                  | Width mm | Length mm | Pack Qty | Product Code  |
|------------------------------|----------|-----------|----------|---------------|
| Flextool Aluminium Bullfloat | 150      | 600       | 4        | FT401801-UNIT |
| Flextool Aluminium Bullfloat | 150      | 900       | 4        | FT401802-UNIT |
| Flextool Aluminium Bullfloat | 150      | 1200      | 6        | FT401803-UNIT |
| Flextool Aluminium Bullfloat | 150      | 1800      | 4        | FT401804-UNIT |



FRESNO TROWELS

Flextool Fresno Trowels enable the operator to trowel concrete from a standing position. They have a tilt mechanism which allows easy push and pull motion. Flextool Fresno Trowels should be used with Telescopic Extension or Clip-Together Handle.

| Description            | Width mm | Length mm | Pack Qty | Product Code  |
|------------------------|----------|-----------|----------|---------------|
| Flextool Fresno Trowel | 115      | 600       | 6        | FT4FF607-UNIT |
| Flextool Fresno Trowel | 115      | 900       | 6        | FT4FF609-UNIT |



WALKING TROWELS

Flextool Walking Trowel Round Ends enable the operator to trowel concrete in a standing position. Made from strong but lightweight steel, the hinged connection allows for the free movement of the blade angle during use. Flextool Walking Trowels should be used with Telescopic Extension or Clip-Together Handle.

| Description                                            | Width (mm) | Length (mm) | Pack Qty | Product Code  |
|--------------------------------------------------------|------------|-------------|----------|---------------|
| Flextool Walking Trowel - Round Ends - Carbon Steel    | 120        | 600         | 6        | FT4FW555-UNIT |
| Flextool Walking Trowel - Round Ends - Stainless Steel | 120        | 600         | 6        | FT4FW557-UNIT |



BOLT CUTTERS

Flextool Bolt Cutters feature hardened steel cutting jaws for extended life, and a self-aligning cam mechanism to maintain precise cutter alignment. These long-handled bolt cutters cut down on the need for repeated bending. The soft ergonomic grips and tubular handles give optimum cutting leverage with maximum comfort.

| Description           | Length mm | Pack Qty | Product Code  |
|-----------------------|-----------|----------|---------------|
| Flextool Bolt Cutters | 750       | 5        | FT4RW094-UNIT |
| Flextool Bolt Cutters | 900       | 5        | FT4RW095-UNIT |



CONCRETE SHOVELS

The Flextool D-Handle Concrete Shovel is designed for moving, loading, mixing and spreading concrete. Made from strong but lightweight steel, the D-Handle grip design eases the load when dragging and spreading concrete.

| Description                               | Length mm | Pack Qty | Product Code  |
|-------------------------------------------|-----------|----------|---------------|
| Flextool Steel D - Handle Concrete Shovel | 1050      | 6        | FT4HGT75-UNIT |
| Flextool Steel D - Handle Concrete Shovel | 1150      | 6        | FT4RW025-UNIT |



KNEELING BOARD

Kneeling boards are for multipurpose use by concreters and flooring contractors and provide comfortable and soft support. They are constructed using dense polyurethane foam and heavy duty polypropylene tray for improved strength.

| Description                      | Width mm | Length mm | Pack Qty | Product Code  |
|----------------------------------|----------|-----------|----------|---------------|
| Flextool Concrete Kneeling Board | 350      | 490       | 6        | FT410209-UNIT |



STANDING BRACKET

The Flextool standing bracket offers a versatile solution for transforming nearly any concrete hand tool into an efficient walking tool. This bracket clamps around the tool's handle and then attaches to an extension handle, allowing for upright operation. For added flexibility, the adaptor's angle can be adjusted as well as be relocated to the opposite end if required.

| Description               | Pack Qty | Product Code  |
|---------------------------|----------|---------------|
| Flextool Standing Bracket | 1        | FT40FPSB-UNIT |



HANDLES AND ADAPTORS

The Flextool handles and adaptors are compatible with a range of tools, and are easy replaced when required.

| Description                                             | Pack Qty | Product Code  |
|---------------------------------------------------------|----------|---------------|
| Flextool Telescopic Extension Handle                    | 4        | FT401805-UNIT |
| Flextool Telescopic Handle Adaptor 25-32 mm             | 50       | FT401800-UNIT |
| Flextool Clip-Together Handle 1.8 m                     | 4        | FT401806-UNIT |
| Flextool Replacement Handle - Magnesium and Wood Floats | 6        | FT42051H-UNIT |



FINISHING BROOMS

The Flextool Finishing Broom is designed to create a non-slip finish on the concrete surface. With the medium fibre bristle, it produces a rough broom surface texture which is suitable for use on footpaths and driveways. Flextool Finishing Broom should be used with Telescopic Extension or Clip-Together Handle.

| Description              | Length mm | Bristle Type | Pack Qty | Product Code  |
|--------------------------|-----------|--------------|----------|---------------|
| Flextool Finishing Broom | 750       | Medium       | 10       | FT4B1573-UNIT |
| Flextool Finishing Broom | 900       | Medium       | 10       | FT4B1574-UNIT |



CONCRETE PLACING RAKES

Flextool lightweight Concrete Placing Rakes are ideal for spreading and placing concrete and any other soft landscaping mediums. Fitted with angled blade for push and pull operation.

| Description                                        | Blade Width mm | Length (mm) | Pack Qty | Product Code  |
|----------------------------------------------------|----------------|-------------|----------|---------------|
| Flextool Concrete Placing Rake – Pull Style        | 500            | 1650        | 6        | FT4CC011-UNIT |
| Flextool Concrete Placing Rake – Push / Pull Style | 500            | 1650        | 6        | FT4CC013-UNIT |







Elite Series™

POOL TROWELS

The Kraft Tool Co and Kraft Tool Co Elite Series Pool Trowels are designed for the smooth finishing of concrete in swimming pools and other curved surfaces. The high-flex blade offers durability and flexibility, with rounded ends to prevent gouging for a smooth finish. Available in both a short and long shank.

| Description                                                         | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|---------------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Short Shank | 14 (355)            | 4 (100)            | FT4K0024-UNIT |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Short Shank | 16 (405)            | 4 (100)            | FT4K0025-UNIT |

|                                                                   |          |         |               |
|-------------------------------------------------------------------|----------|---------|---------------|
| Kraft Tool Co Pool Trowel Blue Steel - ProForm Handle Short Shank | 14 (355) | 3 (75)  | FT4K0171-UNIT |
| Kraft Tool Co Pool Trowel Blue Steel - ProForm Handle Short Shank | 14 (355) | 4 (100) | FT4K0172-UNIT |

|                                                                             |          |         |               |
|-----------------------------------------------------------------------------|----------|---------|---------------|
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Short Shank | 14 (355) | 4 (100) | FT4K0026-UNIT |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Short Shank | 16 (405) | 4 (100) | FT4K0027-UNIT |

|                                                                    |          |         |               |
|--------------------------------------------------------------------|----------|---------|---------------|
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Long Shank | 14 (355) | 4 (100) | FT4K0028-UNIT |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Long Shank | 16 (405) | 4 (100) | FT4K0029-UNIT |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Long Shank | 18 (455) | 4 (100) | FT4K0030-UNIT |

|                                                                            |          |         |               |
|----------------------------------------------------------------------------|----------|---------|---------------|
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Long Shank | 14 (355) | 4 (100) | FT4K0031-UNIT |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Long Shank | 16 (405) | 4 (100) | FT4K0032-UNIT |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Long Shank | 18 (455) | 4 (100) | FT4K0033-UNIT |



SQUARE TROWELS

The Kraft Tool Co and Kraft Tool Co Elite Series Square Trowels are a general-purpose trowel designed for the smooth finishing of concrete and cement render. Suitable for use on concrete stairs and other vertical applications, it is the trowel for the job where a pointed trowel is not suitable. The high-flex blade offers durability and flexibility, its square ends allow you to finish all the way to the corners.

| Description                                               | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle | 14 (355)            | 4 (100)            | FT4K0016-UNIT |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle | 16 (405)            | 4 (100)            | FT4K0017-UNIT |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle | 18 (455)            | 4 (100)            | FT4K0018-UNIT |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle | 20 (510)            | 5 (125)            | FT4K0019-UNIT |

|                                                                   |          |         |               |
|-------------------------------------------------------------------|----------|---------|---------------|
| Kraft Tool Co Elite Series Square Trowel Blue Steel - Cork Handle | 14 (355) | 4 (100) | FT4K0020-UNIT |
| Kraft Tool Co Elite Series Square Trowel Blue Steel - Cork Handle | 16 (405) | 4 (100) | FT4K0021-UNIT |
| Kraft Tool Co Elite Series Square Trowel Blue Steel - Cork Handle | 18 (455) | 4 (100) | FT4K0022-UNIT |







POINTED TROWELS

The Kraft Tool Co and Kraft Tool Co Elite Series Pointed Trowels are designed for trowelling concrete floors and other general concrete work. The high-flex blade offers durability and flexibility, with a pointed front for corners and angles and a square back for finishing along edges and corners.

| Description                                                | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle | 14 (355)            | 4 (100)            | FT4K0008-UNIT |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle | 16 (405)            | 4-1/2 (115)        | FT4K0009-UNIT |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle | 18 (455)            | 4-1/2 (115)        | FT4K0010-UNIT |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle | 20 (510)            | 4-1/2 (115)        | FT4K0011-UNIT |

|                                                                    |          |             |               |
|--------------------------------------------------------------------|----------|-------------|---------------|
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle | 14 (355) | 4 (100)     | FT4K0012-UNIT |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle | 16 (405) | 4-1/2 (115) | FT4K0013-UNIT |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle | 18 (455) | 4-1/2 (115) | FT4K0014-UNIT |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle | 20 (510) | 4-1/2 (115) | FT4K0015-UNIT |

ROUNDED TROWELS

The Kraft Tool Co and Kraft Tool Co Elite Series Rounded Trowels are designed for trowelling concrete floors and other general concrete work. The high-flex blade offers durability and flexibility, with a rounded front to prevent gouging and a square back for clean finishing along edges and corners.

| Description                                                | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle | 14 (355)            | 4 (100)            | FT4K0001-UNIT |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle | 16 (405)            | 4 (100)            | FT4K0002-UNIT |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle | 18 (455)            | 4 (100)            | FT4K0003-UNIT |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle | 20 (510)            | 5 (125)            | FT4K0004-UNIT |

|                                                                    |          |         |               |
|--------------------------------------------------------------------|----------|---------|---------------|
| Kraft Tool Co Elite Series Rounded Trowel Blue Steel - Cork Handle | 14 (355) | 4 (100) | FT4K0005-UNIT |
| Kraft Tool Co Elite Series Rounded Trowel Blue Steel - Cork Handle | 16 (405) | 4 (100) | FT4K0006-UNIT |
| Kraft Tool Co Elite Series Rounded Trowel Blue Steel - Cork Handle | 18 (455) | 4 (100) | FT4K0007-UNIT |

MIDGET TROWELS

The Kraft Tool Co Midget Trowel is designed for trowelling concrete in tight spaces like windowsills and small areas. The high-flex blade offers durability and flexibility, with square ends that finish all the way to corners.

| Description                                               | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Midget Trowel Carbon Steel - ProForm Handle | 8 (205)             | 3 (75)             | FT4K0023-UNIT |



MAGNESIUM HAND FLOATS

The Kraft Tool Co and Kraft Tool Co Elite Series Magnesium Hand Floats are designed to create a non-slip finish on concrete surfaces, commonly used in outdoor paving. The magnesium blade offers superb floating action with bevelled edges and smooth rounded corners for a “broken-in” feel. The square ends float all the way to the edges and corners, ensuring a smooth and level finish.

| Description                                                     | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Mini Magnesium Hand Float Square - ProForm Handle | 7-1/4 (185)         | 3-1/4 (80)         | FT4K0036-UNIT |

|                                                            |          |            |               |
|------------------------------------------------------------|----------|------------|---------------|
| Kraft Tool Co Magnesium Hand Float Square - ProForm Handle | 12 (305) | 3-1/4 (80) | FT4K0037-UNIT |
| Kraft Tool Co Magnesium Hand Float Square - ProForm Handle | 16 (405) | 3-1/4 (80) | FT4K0038-UNIT |
| Kraft Tool Co Magnesium Hand Float Square - ProForm Handle | 20 (510) | 3-1/4 (80) | FT4K0039-UNIT |
| Kraft Tool Co Magnesium Hand Float Round - ProForm Handle  | 16 (405) | 3-1/4 (80) | FT4K0040-UNIT |

|                                                                      |          |            |               |
|----------------------------------------------------------------------|----------|------------|---------------|
| Kraft Tool Co Elite Series Magnesium Hand Float Square - Cork Handle | 16 (405) | 3-1/4 (80) | FT4K0041-UNIT |
| Kraft Tool Co Elite Series Magnesium Hand Float Square - Cork Handle | 20 (510) | 3-1/4 (80) | FT4K0042-UNIT |

ORANGE THUNDER HAND FLOATS

The Kraft Tool Co Orange Thunder Hand Floats are designed to create a non-slip finish on concrete surfaces. The advanced, lightweight KO-20™ technology allows for seamless motions to quickly bring up bleed water to open up the surface as it levels and smooths. The KO-20™ material is impact resistant for extended wear and the blade won't absorb liquids preventing corrosion and rust, and making them easy to clean.

| Description                                                     | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Orange Thunder Hand Float Square - ProForm Handle | 16 (405)            | 3 (75)             | FT4K0034-UNIT |
| Kraft Tool Co Orange Thunder Hand Float Square - ProForm Handle | 20 (510)            | 3 (75)             | FT4K0035-UNIT |

RESIN HAND FLOATS

The Kraft Tool Co Resin Hand Float is designed to create a rough texture on concrete surfaces, making it ideal for use with colour hardeners and other decorative concrete applications. The dense, laminated canvas-resin blade wears like magnesium for an extremely long life. The square ends float to edges and corners, ensuring a smooth and level finish.

| Description                                     | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Resin Hand Float - Proform Handle | 16 (405)            | 3-1/4 (80)         | FT4K0043-UNIT |

HAND GROOVERS

The Kraft Tool Co and Kraft Tool Co Elite Series Hand Groovers are designed for controlling shrinking and cracking of concrete. The blade moves smoothly through concrete, creating grooves for a safety tread effect on high traffic areas such as driveways, sidewalks and stairs.

| Description                                                   | Length<br>inch (mm) | Width<br>inch (mm) | Radius<br>inch (mm) | Depth<br>inch (mm) | Product Code  |
|---------------------------------------------------------------|---------------------|--------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Safety Groover Stainless Steel - ProForm Handle | 6 (150)             | 5-1/2 (140)        | N/A                 | 1/4 (6)            | FT4K0057-UNIT |

|                                                              |         |             |         |            |               |
|--------------------------------------------------------------|---------|-------------|---------|------------|---------------|
| Kraft Tool Co Elite Series Hand Groover Bronze - Cork Handle | 6 (150) | 4-1/2 (115) | 1/4 (6) | 1/2 (12.5) | FT4K0058-UNIT |
| Kraft Tool Co Elite Series Hand Groover Bronze - Cork Handle | 6 (150) | 4-1/2 (115) | 1/4 (6) | 3/4 (19)   | FT4K0059-UNIT |





BEVEL EDGERS

The Kraft Tool Co Bevel Edger is designed to easily create a smooth finish to the edges of a concrete slab. The edger creates a 45 degree radius on the edge of concrete slabs to prevent that edge from chipping with wear.

| Description                                                          | Length<br>inch (mm) | Width<br>inch (mm) | Angle<br>(degree) | Bevel<br>inch (mm) | Product Code  |
|----------------------------------------------------------------------|---------------------|--------------------|-------------------|--------------------|---------------|
| Kraft Tool Co 45 Degree Bevel Edger Stainless Steel - ProForm Handle | 6 (150)             | 4-3/4 (120)        | 45                | 1 (25)             | FT4K0056-UNIT |



EDGERS

The Kraft Tool Co and Kraft Tool Co Elite Series Edgers are designed for smooth edging on patios, kerbs, pavements and driveways. They produce a tighter, cleaner, curved profile finish on the concrete edge to prevent future chipping and damage.

| Description                                                   | Length<br>inch (mm) | Width<br>inch (mm) | Radius<br>inch (mm) | Depth<br>inch (mm) | Product Code  |
|---------------------------------------------------------------|---------------------|--------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 6 (150)             | 3 (75)             | 1/4 (6)             | 3/8 (9.5)          | FT4K0045-UNIT |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 6 (150)             | 3 (75)             | 3/8 (9.5)           | 1/2 (12.5)         | FT4K0046-UNIT |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 6 (150)             | 4 (100)            | 1/4 (6)             | 3/8 (9.5)          | FT4K0047-UNIT |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 6 (150)             | 4 (100)            | 3/8 (9.5)           | 1/2 (12.5)         | FT4K0048-UNIT |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 6 (150)             | 4 (100)            | 1/2 (12.5)          | 5/8 (16)           | FT4K0049-UNIT |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 8 (205)             | 6 (150)            | 1/4 (6)             | 3/8 (9.5)          | FT4K0050-UNIT |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle | 8 (205)             | 6 (150)            | 1/2 (12.5)          | 5/8 (16)           | FT4K0051-UNIT |



|                                                                  |         |           |            |          |               |
|------------------------------------------------------------------|---------|-----------|------------|----------|---------------|
| Kraft Tool Co Safety Step Edger Stainless Steel - ProForm Handle | 6 (150) | 4.5 (115) | 1/2 (12.5) | 5/8 (16) | FT4K0055-UNIT |
|------------------------------------------------------------------|---------|-----------|------------|----------|---------------|

|                                                                    |         |         |            |            |               |
|--------------------------------------------------------------------|---------|---------|------------|------------|---------------|
| Kraft Tool Co Elite Series Concrete Edger Blue Steel - Cork Handle | 6 (150) | 3 (75)  | 1/4 (6)    | 3/8 (9.5)  | FT4K0052-UNIT |
| Kraft Tool Co Elite Series Concrete Edger Blue Steel - Cork Handle | 6 (150) | 4 (100) | 3/8 (9.5)  | 1/2 (12.5) | FT4K0053-UNIT |
| Kraft Tool Co Elite Series Concrete Edger Blue Steel - Cork Handle | 6 (150) | 6 (150) | 1/2 (12.5) | 5/8 (16)   | FT4K0054-UNIT |

CORNER STEP TOOLS

The Kraft Tool Co Inside Corner Step Tools are designed to create smooth inside corners on concrete steps and edges. The stainless steel blade moves smoothly along the edge of concrete, ensuring even coverage and a professional finish.

| Description                                                            | Length<br>inch (mm) | Width<br>inch (mm) | Radius    | Depth<br>inch (mm) | Product Code  |
|------------------------------------------------------------------------|---------------------|--------------------|-----------|--------------------|---------------|
| Kraft Tool Co Inside Corner Step Tool Stainless Steel - ProForm Handle | 6 (150)             | 2-1/2 (65)         | 1/4 (6)   | 2-1/2 (65)         | FT4K0062-UNIT |
| Kraft Tool Co Inside Corner Step Tool Stainless Steel - ProForm Handle | 6 (150)             | 2-1/2 (65)         | 90 degree | 2-1/2 (65)         | FT4K0063-UNIT |



|                                                                         |         |            |           |            |               |
|-------------------------------------------------------------------------|---------|------------|-----------|------------|---------------|
| Kraft Tool Co Outside Corner Step Tool Stainless Steel - ProForm Handle | 6 (150) | 2-1/2 (65) | 1/4 (6)   | 2-1/2 (65) | FT4K0060-UNIT |
| Kraft Tool Co Outside Corner Step Tool Stainless Steel - ProForm Handle | 6 (150) | 2-1/2 (65) | 90 degree | 2-1/2 (65) | FT4K0061-UNIT |

CORNER TROWELS

The Kraft Tool Co Corner Trowels are designed to create smooth corners on concrete surfaces. The stainless steel blade moves smoothly along the edge of concrete, ensuring even coverage and a professional finish.

| Description                                                         | Length<br>inch (mm) | Width<br>inch (mm) | Radius    | Depth<br>inch (mm) | Product Code  |
|---------------------------------------------------------------------|---------------------|--------------------|-----------|--------------------|---------------|
| Kraft Tool Co Inside Corner Trowel Stainless Steel - ProForm Handle | 3-1/8 (80)          | 1 (25)             | 90 degree | 1 (25)             | FT4K0064-UNIT |
| Kraft Tool Co Inside Corner Trowel Stainless Steel - ProForm Handle | 4 (100)             | 2 (50)             | 90 degree | 2 (50)             | FT4K0065-UNIT |



|                                                                      |            |        |           |        |               |
|----------------------------------------------------------------------|------------|--------|-----------|--------|---------------|
| Kraft Tool Co Outside Corner Trowel Stainless Steel - ProForm Handle | 3-1/8 (80) | 1 (25) | 90 degree | 1 (25) | FT4K0066-UNIT |
| Kraft Tool Co Outside Corner Trowel Stainless Steel - ProForm Handle | 4 (100)    | 2 (50) | 90 degree | 2 (50) | FT4K0067-UNIT |

WALKING EDGERS

The Kraft Tool Co Walking Edgers are designed to create smooth, rounded edges on concrete surfaces, preventing chipping and ensuring a professional finish.

| Description                                 | Length<br>inch (mm) | Width<br>inch (mm) | Radius<br>inch (mm) | Depth<br>inch (mm) | Product Code  |
|---------------------------------------------|---------------------|--------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Walking Edger Stainless Steel | 8 (205)             | 6 (150)            | 1/4 (6)             | 3/8 (9.5)          | FT4K0081-UNIT |
| Kraft Tool Co Walking Edger Stainless Steel | 10 (255)            | 6 (150)            | 1/2 (12.5)          | 5/8 (16)           | FT4K0082-UNIT |



WALKING GROOVERS

The Kraft Tool Co Walking Groovers Bronze are designed to cut control joints in concrete, ensuring a smooth and professional finish.

| Description                          | Length<br>inch (mm) | Width<br>inch (mm) | Radius<br>inch (mm) | Depth<br>inch (mm) | Product Code  |
|--------------------------------------|---------------------|--------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Walking Groover Bronze | 6 (150)             | 4-1/2 (115)        | 1/4 (6)             | 1/2 (12.5)         | FT4K0079-UNIT |
| Kraft Tool Co Walking Groover Bronze | 6 (150)             | 4-1/2 (115)        | 1/4 (6)             | 3/4 (19)           | FT4K0080-UNIT |



MAGNESIUM BULL FLOATS

The Kraft Tool Co Magnesium Bull Floats are expertly engineered to level and smooth large concrete areas. As they open the surface, they release bleed water and embed the aggregate, ensuring a durable finish. The rounded ends prevent gouging, providing a flawless, professional result. These bull floats are compatible with various bracket and handle types.

| Description                                               | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Magnesium Bull Float Round End - Blade only | 36 (915)            | 8 (205)            | FT4K0070-UNIT |
| Kraft Tool Co Magnesium Bull Float Round End - Blade only | 48 (1220)           | 8 (205)            | FT4K0071-UNIT |



ORANGE THUNDER BULL FLOATS

The Kraft Tool Co Orange Thunder Bull Floats have advanced, lightweight KO-20™ technology that allows for seamless motions to quickly bring up bleed water to open up the surface as it levels and smooths. The KO-20™ material is impact resistant for extended wear and the blade won't absorb liquids preventing corrosion and rust, and making them easy to clean.

| Description                                                    | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|----------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Orange Thunder Bull Float Round End - Blade only | 36 (915)            | 8 (205)            | FT4K0072-UNIT |
| Kraft Tool Co Orange Thunder Bull Float Round End - Blade only | 48 (1220)           | 8 (205)            | FT4K0073-UNIT |



BIG D BLUE STEEL BULL FLOATS

The Kraft Tool Co Big D Blue Steel Bull Floats produce a super smooth finish without gouging. The heavy-duty anodized aluminium C-channel design provides extra rigidity and flatness.

| Description                                                      | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|------------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Big D Blue Steel Bull Float Round End - Blade only | 36 (915)            | 12 (305)           | FT4K0074-UNIT |
| Kraft Tool Co Big D Blue Steel Bull Float Round End - Blade only | 48 (1220)           | 12 (305)           | FT4K0075-UNIT |



WALKING TROWELS

The Kraft Tool Co Walking Trowels are designed for the smooth finishing of large concrete surfaces. The high-quality blade ensures a perfect finish, with round ends that eliminate gouging of concrete. These walking trowels are compatible with various adapters and handle types.

| Description                                                             | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-------------------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Walking Trowel Round End Carbon Steel - All-Angle Bracket | 25 (610)            | 5 (125)            | FT4K0068-UNIT |
| Kraft Tool Co Walking Trowel Round End Carbon Steel - All-Angle Bracket | 36 (915)            | 5 (125)            | FT4K0069-UNIT |





CONCRETE PLACING RAKES

The Kraft Tool Co Concrete Placing Rakes are designed to move concrete into place with ease.

| Description                                                          | Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|----------------------------------------------------------------------|---------------------|--------------------------|---------------|
| Kraft Tool Co Concrete Placing Rake All Aluminium - Foam Grip Handle | 60 (1525)           | 19-1/2 (495)             | FT4K0100-UNIT |
| Kraft Tool Co Concrete Placing Rake Steel Blade - Wood Handle        | 54 (1370)           | 22-1/2 (570)             | FT4K0101-UNIT |
| Kraft Tool Co Concrete Placing Rake Magnesium Blade - Wood Handle    | 54 (1370)           | 19-1/2 (495)             | FT4K0102-UNIT |
| Kraft Tool Co Concrete Placing Rake - Replacement Wood Handle        | 54 (1370)           | N/A                      | FT4K0103-UNIT |

FINISHING BROOMS

The Kraft Tool Co Finishing Brooms are designed for finishing sidewalks and driveways, providing a finish with traction. The broom head lays almost flat against the surface for a smooth finish. The broom can be used by hand or with a clevis handle or adapter.

| Description                                                            | Length<br>inch (mm) | Product Code  |
|------------------------------------------------------------------------|---------------------|---------------|
| Kraft Tool Co Finishing Broom Soft Nylon                               | 36 (915)            | FT4K0083-UNIT |
| Kraft Tool Co Finishing Broom Weigh-Lite Soft Poly                     | 36 (915)            | FT4K0084-UNIT |
| Kraft Tool Co Finishing Broom Weigh-Lite Soft Poly - Replacement Strip | 36 (915)            | FT4K0085-UNIT |

HANDLES AND ADAPTORS

The Kraft Tool Co Handles and Adaptors are designed for maximum versatility and durability. They are compatible with a wide range of concrete tools, providing a secure and comfortable grip.

| Description                             | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-----------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Anodized Aluminium Handle | 72 (1830)           | 1-3/4 (45)         | FT4K0087-UNIT |
| Kraft Tool Co Anodized Aluminium Handle | 72 (1830)           | 1-3/8 (35)         | FT4K0088-UNIT |

|                                        |           |     |               |
|----------------------------------------|-----------|-----|---------------|
| Kraft Tool Co Steel Clevis Wood Handle | 72 (1830) | N/A | FT4K0093-UNIT |
|----------------------------------------|-----------|-----|---------------|

|                                              |     |     |               |
|----------------------------------------------|-----|-----|---------------|
| Kraft Tool Co EZY-Tilt Button Handle Adapter | N/A | N/A | FT4K0094-UNIT |
|----------------------------------------------|-----|-----|---------------|

|                                            |          |            |               |
|--------------------------------------------|----------|------------|---------------|
| Kraft Tool Co Double Button Clip - 10 Pack | N/A      | N/A        | FT4K0091-UNIT |
| Kraft Tool Co Single Button Clip - 10 Pack | N/A      | N/A        | FT4K0092-UNIT |
| Kraft Tool Co Clevis Button Handle Adapter | 10 (255) | 1-3/4 (45) | FT4K0089-UNIT |
| Kraft Tool Co Clevis Button Handle Adapter | 8 (205)  | 1-3/8 (35) | FT4K0090-UNIT |

|                                                                 |     |     |               |
|-----------------------------------------------------------------|-----|-----|---------------|
| Kraft Tool Co Tilt Float Bracket Kuncklehead Aluminium - 6 hole | N/A | N/A | FT4K0077-UNIT |
| Kraft Tool Co Tilt Float Bracket EZY-Tilt Aluminium - 6 hole    | N/A | N/A | FT4K0078-UNIT |

|                                        |     |     |               |
|----------------------------------------|-----|-----|---------------|
| Kraft Tool Co All-Angle Fresno Bracket | N/A | N/A | FT4K0095-UNIT |
|----------------------------------------|-----|-----|---------------|

FLOAT AND TROWEL HOOKS

The Kraft Tool Co Float and Trowel Hook features strong plastic construction to keep your hand float within arm's reach. This hook attaches to your belt, pants, or back pocket, keeping your hands free while keeping your tools convenient. It can hold hand floats, edgers, groovers, trowels, or other tools needed around the job site.

| Description   | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|---------------|---------------------|--------------------|---------------|
| FT4K0043-UNIT | N/A                 | N/A                | FT4K0044-UNIT |

EZY-TOTE TOOL CARRIERS

The Kraft Tool Co EZY-Tote Tool Carrier is designed to carry all your finishing tools at once. The carrier features five exterior pockets and four interior pockets, including mesh and flap closure pockets, to organise your tools. It also includes a tape measure holder and straps for long items. The interior is designed to hold four bull float handles securely, with a cut-out opening for the bracket.

| Description                         | Product Code  |
|-------------------------------------|---------------|
| Kraft Tool Co EZY-Tote Tool Carrier | FT4K0076-UNIT |

ROLLER TAMPS

The Kraft Tool Co Roller Tamp is designed for preparing the surface of a slab for a smoother finish. The double rollers depress the aggregate and bring the fat to the surface uniformly, ensuring a quick and efficient leveling process. Additionally, it can create a non-skid surface when rolled over for a final finish.

| Description               | Length<br>inch (mm) | Diameter<br>inch (mm) | Product Code  |
|---------------------------|---------------------|-----------------------|---------------|
| Kraft Tool Co Roller Tamp | 36 (915)            | 5 (125)               | FT4K0086-UNIT |

FLOOR SCRAPERS

The Kraft Tool Co Floor Scrapers Steel are designed to shave all kinds of floor coverings on any type of floor. These strong, rugged, all-steel floor scrapers feature a T-handle for easy gripping, weighted base and an inward tapered blade which focuses the force transfer from the handle to the blade for superior power when scraping.

| Description                                           | Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|-------------------------------------------------------|---------------------|--------------------------|---------------|
| Kraft Tool Co Floor Scraper Steel - T-Handle          | 54 (1370)           | 7 (175)                  | FT4K0096-UNIT |
| Kraft Tool Co Floor Scraper Steel - T-Handle          | 54 (1370)           | 10 (255)                 | FT4K0097-UNIT |
| Kraft Tool Co Floor Scraper Steel - Replacement Blade | N/A                 | 7 (175)                  | FT4K0098-UNIT |
| Kraft Tool Co Floor Scraper Steel - Replacement Blade | N/A                 | 10 (255)                 | FT4K0099-UNIT |

HEAVY-DUTY PRY BARS

The Kraft Tool Co Heavy-Duty Pry Bars are designed for prying forms, demolition, and other construction jobs. The hardened steel claw features a specifically designed blade angle for easy prying, and the tubular handle provides strong leverage.

| Description                                  | Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|----------------------------------------------|---------------------|--------------------------|---------------|
| Kraft Tool Co Heavy-Duty Pry Bar Little John | 48 (1220)           | 3 (75)                   | FT4K0104-UNIT |
| Kraft Tool Co Heavy-Duty Pry Bar Big John    | 57 (1450)           | 3 (75)                   | FT4K0105-UNIT |







REBAR BENDERS

The Kraft Tool Co Rebar Bender is designed to be strong, lightweight, and simple to use. The welded steel construction ensures durability, and the configuration makes it easy to bend rebar.

| Description                | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|----------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Rebar Bender | 34 (865)            | 4 (100)            | FT4K0106-UNIT |



KNEE BOARDS

The Kraft Tool Co Concrete Knee Board Sliders are designed to provide comfort and protection while working on concrete surfaces. Made from tough, heavy-duty ABS plastic, the rounded edges prevent digging into concrete, and the plastic resists corrosion and provides easy cleanup. The knee pads are made of durable polyurethane and attach securely with adjustable web straps. The knee pads are removable and replaceable for extended use.

| Description                                                               | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|---------------------------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Concrete Knee Board Sliders Plastic                         | 30 (760)            | 10 (255)           | FT4K0107-UNIT |
| Kraft Tool Co Concrete Knee Board Sliders Plastic - Replacement Knee Pads | N/A                 | N/A                | FT4K0108-UNIT |



TIE WIRE TOOLS

The Kraft Tool Co Tie Wires are designed to be heavy-duty yet lightweight. The strong construction will not chip, crack, or break. The reel holds wire for twisting around rebar and features an easy-turn handle. It fits on any standard belt loop.

| Description                                  | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|----------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Tie Wire Reel Aluminium        | N/A                 | N/A                | FT4K0109-UNIT |
| Kraft Tool Co Tie Wire Twister - Wood Handle | N/A                 | N/A                | FT4K0110-UNIT |



RUBBING BLOCKS

The Kraft Tool Co Concrete Knee Board Sliders are designed to dress down concrete surfaces. The fluted silicon carbide rub brick is on a diagonal, providing sharp edges for stubborn materials and carries away debris. Creates a smooth professional finish on block walls, wet tile, and concrete, especially excess cement from forms.

| Description                                  | Length<br>inch (mm) | Width<br>inch (mm) | Block Height<br>inch (mm) | Grit | Product Code  |
|----------------------------------------------|---------------------|--------------------|---------------------------|------|---------------|
| Kraft Tool Co Rubbing Block - Plastic Handle | 6 (150)             | 3 (75)             | 1 (25)                    | 20   | FT4K0111-UNIT |
| Kraft Tool Co Rubbing Block - Plastic Handle | 6 (150)             | 3 (75)             | 1 (25)                    | 60   | FT4K0112-UNIT |



ORANGE THUNDER TROWEL BLADES

The Kraft Tool Co Orange Thunder Trowel Blades are designed for finishing concrete projects with walk-behind power trowel machines. Made from advanced, lightweight KO-20™ technology, these blades provide even coverage and do not leave burnish marks. The KO-20™ material is impact resistant for extended wear and the blade won't absorb liquids preventing corrosion and rust, and making them easy to clean.

| Description                                           | Blades<br>per pack | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-------------------------------------------------------|--------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Orange Thunder Trowel Blade - Finishing | 4                  | 14 (355)            | 6 (150)            | FT4K0113-UNIT |
| Kraft Tool Co Orange Thunder Trowel Blade - Finishing | 4                  | 18 (455)            | 6 (150)            | FT4K0114-UNIT |



MASONRY  
HAND TOOLS







FORGED STEEL

The blade and shank are forged from a single piece of uniquely formulated carbon steel for extra toughness.

FLEXIBILITY

W.Rose features a tapered ground blade for flexibility.

STRENGTH

The forged steel blade and shank offer strength and integrity with no internal voids. Forged steel will not weaken or crack.

HAND POLISHED

Each blade is carefully polished to keep mortar centered on the blade and resist sliding.



SHANK ANGLE

The standard shank angle is specifically balanced to reduce wrist fatigue.

INSPECTION

Every trowel is inspected, keeping in mind the high-quality standards of the W.Rose legacy. They also undergo testing for blade hardness and consistent size.

HANDLE STYLES

These are available in three handle styles: ProForm, Plastic, and Leather. All handles are specifically contoured for a comfortable grip.



PHILADELPHIA BRICK TROWELS

The W.Rose Philadelphia Brick Trowels are designed for holding the most mortar with their square heel, making them popular for use with block. Forged from a single piece of carbon steel, each blade is hand polished to keep mortar centred and resist sliding. The shank angle reduces wrist fatigue, and the tapered ground blade assists flexibility. Each blade is heat tempered for uniform hardness and inspected to meet high W.Rose quality standards.

| Description                                       | Blade Length<br>inch (mm) | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|---------------------------------------------------|---------------------------|----------------------------|--------------------------|---------------|
| W.Rose Philadelphia Brick Trowel - ProForm Handle | 12 (305)                  | 6 (150)                    | 5-9/16 (140)             | FT4K0118-UNIT |
| W.Rose Philadelphia Brick Trowel - Plastic Handle | 12 (305)                  | 5-1/4 (135)                | 5-9/16 (140)             | FT4K0120-UNIT |
| W.Rose Philadelphia Brick Trowel - Leather Handle | 12 (305)                  | 5-1/2 (140)                | 5-9/16 (140)             | FT4K0121-UNIT |



NARROW LONDON BRICK TROWELS

The W.Rose Narrow London Brick Trowels are designed to carry mortar towards the toe of the blade, away from the handle. The narrow diamond blade is perfect for brick and general masonry work. Forged from a single piece of carbon steel, each blade is hand polished to keep mortar centred and resist sliding. The shank angle reduces wrist fatigue, and the tapered ground blade assists flexibility. Each blade is heat tempered for uniform hardness and inspected to meet high W.Rose quality standards.

| Description                                        | Blade Length<br>inch (mm) | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|----------------------------------------------------|---------------------------|----------------------------|--------------------------|---------------|
| W.Rose Narrow London Brick Trowel - ProForm Handle | 13 (330)                  | 6 (150)                    | 5-3/8 (135)              | FT4K0127-UNIT |
| W.Rose Narrow London Brick Trowel - Plastic Handle | 13 (330)                  | 5-1/4 (135)                | 5-3/8 (135)              | FT4K0129-UNIT |
| W.Rose Narrow London Brick Trowel - Leather Handle | 13 (330)                  | 5-1/2 (140)                | 5-3/8 (135)              | FT4K0130-UNIT |



WIDE LONDON BRICK TROWELS

The W.Rose Wide London Brick Trowels are designed to carry mortar towards the toe of the blade, away from the handle. The wide blade holds more mortar, making it popular for stonework and block. Forged from a single piece of carbon steel, each blade is hand polished to keep mortar centred and resist sliding. The shank angle reduces wrist fatigue, and the tapered ground blade assists flexibility. Each blade is heat tempered for uniform hardness and inspected to meet high W.Rose quality standards.

| Description                                      | Blade Length<br>inch (mm) | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|--------------------------------------------------|---------------------------|----------------------------|--------------------------|---------------|
| W.Rose Wide London Brick Trowel - ProForm Handle | 12 (305)                  | 6 (150)                    | 5-13/16 (145)            | FT4K0123-UNIT |
| W.Rose Wide London Brick Trowel - Plastic Handle | 12 (305)                  | 5-1/4 (135)                | 5-13/16 (145)            | FT4K0125-UNIT |
| W.Rose Wide London Brick Trowel - Leather Handle | 12 (305)                  | 5-1/2 (140)                | 5-13/16 (145)            | FT4K0126-UNIT |



AVAILABLE IN THREE PREMIUM HANDLE OPTIONS.  
ALL STYLES ARE SPECIALLY CONTOURED FOR A COMFORTABLE GRIP.



ProForm Handle

Plastic Handle

Leather Handle





POINTING TROWELS

The Kraft Tool Co Pointing Trowel is designed for a wide range of masonry tasks, including scraping, digging, mixing, patching, and repair work.

| Description                                    | Blade Length<br>inch (mm) | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|------------------------------------------------|---------------------------|----------------------------|--------------------------|---------------|
| Kraft Tool Co Pointing Trowel - ProForm Handle | 5-1/2 (140)               | 4-1/2 (115)                | 2-1/2 (65)               | FT4K0131-UNIT |

MARGIN TROWELS

The Kraft Tool Co Margin Trowel is designed for precision in a variety of masonry tasks, including scraping, digging, mixing, patching, and repair work.

| Description                                  | Blade Length<br>inch (mm) | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|----------------------------------------------|---------------------------|----------------------------|--------------------------|---------------|
| Kraft Tool Co Margin Trowel - ProForm Handle | 5 (125)                   | 4-1/2 (115)                | 2 (50)                   | FT4K0132-UNIT |

GAUGING TROWELS

The Kraft Tool Co Gauging Trowel is designed for mixing and applying mortar with precision.

| Description                                               | Blade Length<br>inch (mm) | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------------|---------------------------|----------------------------|--------------------------|---------------|
| Kraft Tool Co Gauging Trowel Steel Blade - ProForm Handle | 7 (180)                   | 5-1/8 (130)                | 3-1/4 (80)               | FT4K0133-UNIT |

CAULKING TROWELS

The Kraft Tool Co Caulking Trowel is designed for tuckpointing, caulking, and other fine masonry tasks.

| Description                                    | Blade Length<br>inch (mm) | Width<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|------------------------------------------------|---------------------------|--------------------|--------------------------|---------------|
| Kraft Tool Co Caulking Trowel - ProForm Handle | 6-5/8 (170)               | 4-1/2 (115)        | 1/4 (6)                  | FT4K0134-UNIT |
| Kraft Tool Co Caulking Trowel - ProForm Handle | 6-5/8 (170)               | 4-1/2 (115)        | 1/2 (12.5)               | FT4K0135-UNIT |
| Kraft Tool Co Caulking Trowel - ProForm Handle | 6-5/8 (170)               | 4-1/2 (115)        | 3/4 (19)                 | FT4K0136-UNIT |

BRICK JOINTERS

The Kraft Tool Co Brick Jointers are designed to create the most popular masonry joint. The shape of the tool provides knuckle clearance as you move along the joints.

| Description                            | Length<br>inch (mm) | Jointer Sizes<br>inch (mm) | Product Code  |
|----------------------------------------|---------------------|----------------------------|---------------|
| Kraft Tool Co Brick Jointer 1/2 x 5/8" | 10-1/2 (265)        | 1/2 (12.5)<br>5/8 (16)     | FT4K0137-UNIT |
| Kraft Tool Co Brick Jointer 5/8 x 3/4  | 10-1/2 (265)        | 5/8 (16)<br>3/4 (19)       | FT4K0138-UNIT |

HUBBARD BRICK JOINTERS

The Kraft Tool Co Hubbard Brick Jointer is designed to create four different joint sizes with one tool. The jointer features a tubular steel blade that can be rotated for even wear.

| Description                                       | Length<br>inch (mm) | Jointer Sizes<br>inch (mm)                     | Product Code  |
|---------------------------------------------------|---------------------|------------------------------------------------|---------------|
| Kraft Tool Co Hubbard Brick Jointer               | 8-1/2 (215)         | 1/2 (12.5)<br>5/8 (16)<br>3/4 (19)<br>7/8 (22) | FT4K0139-UNIT |
| Kraft Tool Co Hubbard Jointer - Replacement Blade | 3-1/8 (80)          | 1/2 (12.5)                                     | FT4K0140-UNIT |
| Kraft Tool Co Hubbard Jointer - Replacement Blade | 3-1/8 (80)          | 5/8 (16)                                       | FT4K0141-UNIT |
| Kraft Tool Co Hubbard Jointer - Replacement Blade | 3-1/8 (80)          | 3/4 (19)                                       | FT4K0142-UNIT |
| Kraft Tool Co Hubbard Jointer - Replacement Blade | 3-1/8 (80)          | 7/8 (22)                                       | FT4K0143-UNIT |



SLED RUNNERS

The Kraft Tool Co Half Round Sled Runner is designed for creating smooth, rounded joints in masonry work.

| Description                                           | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-------------------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Half Round Sled Runner - ProForm Handle | 14 (355)            | 5/8 (16)           | FT4K0144-UNIT |



CHISELS

The Kraft Tool Co Tooth Stone Mason's Chisels and Plugging Chisel are designed for cutting through soft stone.

| Description                              | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|------------------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Tooth Stone Mason's Chisel | 8-3/4 (220)         | 1-3/4 (35)         | FT4K0145-UNIT |
| Kraft Tool Co Tooth Stone Mason's Chisel | 8-3/4 (220)         | 2-1/4 (55)         | FT4K0146-UNIT |
| Kraft Tool Co Tooth Stone Mason's Chisel | 8-7/8 (225)         | 2-3/4 (70)         | FT4K0147-UNIT |



PLUGGING CHISELS

The Kraft Tool Co Plugging Chisel is designed for strength and durability. Forged from well-tempered tool steel, the tapered blade cuts through mortar to clean out joints for tuckpointing and repair work.

| Description                   | Length<br>inch (mm) | Width<br>inch (mm) | Product Code  |
|-------------------------------|---------------------|--------------------|---------------|
| Kraft Tool Co Plugging Chisel | 10 (255)            | N/A                | FT4K0148-UNIT |



UTILITY BRUSHES

The Kraft Tool Co Jumbo Utility Brushes are designed for use on masonry, brick, tile, stone, and more.

| Description                                         | Length<br>inch (mm) | Bristle Width<br>inch (mm) | Product Code  |
|-----------------------------------------------------|---------------------|----------------------------|---------------|
| Kraft Tool Co Jumbo Utility Brush - Red Wood Handle | 11-1/2 (290)        | 6-1/2 (165)                | FT4K0149-UNIT |
| Kraft Tool Co Plastic Acid Brush - Wood Handle      | 8-1/2 (215)         | 3 (75)                     | FT4K0150-UNIT |



MORTAR HOES

The Kraft Tool Co Mortar Hoe is designed to quickly mix up mortar for brick, block, or stonework. The unique design features holes in the blade to help mortar flow and mix for better consistency.

| Description                            | Handle Length<br>inch (mm) | Blade Width<br>inch (mm) | Product Code  |
|----------------------------------------|----------------------------|--------------------------|---------------|
| Kraft Tool Co Mortar Hoe - Wood Handle | 21 (535)                   | 6-1/2 (165)              | FT4K0152-UNIT |



SKATE WHEEL JOINT RAKERS

The Kraft Tool Co Joint Raker is designed for quickly raking out mortar joints for restoration and repair. The adjustable hardened nail can be moved for the desired depth of joint. The large wheels provide smooth movements along brick and block.

| Description                                     | Length<br>inch (mm) | Product Code  |
|-------------------------------------------------|---------------------|---------------|
| Kraft Tool Co Skate Wheel Joint Raker Aluminium | 9-1/8 (230)         | FT4K0153-UNIT |



BRICKLAYER'S HAMMERS

The Kraft Tool Co Bricklayer's Hammer is designed for chipping away at brick, stone, or tile.

| Description                       | Length<br>inch (mm) | Product Code  |
|-----------------------------------|---------------------|---------------|
| Kraft Tool Co Bricklayer's Hammer | 11-1/4 (285)        | FT4K0154-UNIT |







LINE LEVELS

The Kraft Tool Co Aluminium Line Level is designed for precision leveling in masonry and construction work.

| Description                        | Length<br>inch (mm) | Product Code  |
|------------------------------------|---------------------|---------------|
| Kraft Tool Co Aluminium Line Level | 3 (75)              | FT4K0155-UNIT |



GROUT BAGS

The Kraft Tool Co Poly-Lined Grout Bag is designed for easy flow of material, ensuring a consistent application. This reusable, easy to clean bag comes ready to use with a moulded tip. This grout bag is excellent for grouting masonry or tile joints, providing a professional finish.

| Description                        | Length<br>inch (mm) | Width<br>inch (mm) | Capacity<br>L (gal) | Product Code  |
|------------------------------------|---------------------|--------------------|---------------------|---------------|
| Kraft Tool Co Poly-Lined Grout Bag | 23 (584)            | 13 (330)           | 4.73 (1.25)         | FT4K0151-UNIT |



KRAFT TOOL CO AND W.ROSE PRODUCT REGISTER LIST

| Product Name                                                                | Kraft Tool Co Product Code | Flextool Product Code |
|-----------------------------------------------------------------------------|----------------------------|-----------------------|
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Short Shank         | CF437PF                    | FT4K0024-UNIT         |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Short Shank         | CF438PF                    | FT4K0025-UNIT         |
| Kraft Tool Co Pool Trowel Blue Steel - ProForm Handle Short Shank           | CF272BPF                   | FT4K0171-UNIT         |
| Kraft Tool Co Pool Trowel Blue Steel - ProForm Handle Short Shank           | CF277BPF                   | FT4K0172-UNIT         |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Long Shank          | CF446PF                    | FT4K0028-UNIT         |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Long Shank          | CF447PF                    | FT4K0029-UNIT         |
| Kraft Tool Co Pool Trowel Carbon Steel - ProForm Handle Long Shank          | CF448PF                    | FT4K0030-UNIT         |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Short Shank | CFE277BK                   | FT4K0026-UNIT         |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Short Shank | CFE279BK                   | FT4K0027-UNIT         |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Long Shank  | CFE736BK                   | FT4K0031-UNIT         |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Long Shank  | CFE737BK                   | FT4K0032-UNIT         |
| Kraft Tool Co Elite Series Pool Trowel Blue Steel - Cork Handle Long Shank  | CFE738BK                   | FT4K0033-UNIT         |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle                   | CF217PF                    | FT4K0016-UNIT         |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle                   | CF222PF                    | FT4K0017-UNIT         |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle                   | CF227PF                    | FT4K0018-UNIT         |
| Kraft Tool Co Square Trowel Carbon Steel - ProForm Handle                   | CF232PF                    | FT4K0019-UNIT         |
| Kraft Tool Co Elite Series Square Trowel Blue Steel - Cork Handle           | CFE731BK                   | FT4K0020-UNIT         |
| Kraft Tool Co Elite Series Square Trowel Blue Steel - Cork Handle           | CFE732BK                   | FT4K0021-UNIT         |
| Kraft Tool Co Elite Series Square Trowel Blue Steel - Cork Handle           | CFE729BK                   | FT4K0022-UNIT         |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle                  | CF701PF                    | FT4K0008-UNIT         |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle                  | CF702PF                    | FT4K0009-UNIT         |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle                  | CF703PF                    | FT4K0010-UNIT         |
| Kraft Tool Co Pointed Trowel Carbon Steel - ProForm Handle                  | CF704PF                    | FT4K0011-UNIT         |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle          | CFE701BK                   | FT4K0012-UNIT         |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle          | CFE702BK                   | FT4K0013-UNIT         |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle          | CFE703BK                   | FT4K0014-UNIT         |
| Kraft Tool Co Elite Series Pointed Trowel Blue Steel - Cork Handle          | CFE704BK                   | FT4K0015-UNIT         |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle                  | CF284PF                    | FT4K0001-UNIT         |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle                  | CF285PF                    | FT4K0002-UNIT         |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle                  | CF286PF                    | FT4K0003-UNIT         |
| Kraft Tool Co Rounded Trowel Carbon Steel - ProForm Handle                  | CF288PF                    | FT4K0004-UNIT         |
| Kraft Tool Co Elite Series Rounded Trowel Blue Steel - Cork Handle          | CFE284BK                   | FT4K0005-UNIT         |
| Kraft Tool Co Elite Series Rounded Trowel Blue Steel - Cork Handle          | CFE285BK                   | FT4K0006-UNIT         |
| Kraft Tool Co Elite Series Rounded Trowel Blue Steel - Cork Handle          | CFE286BK                   | FT4K0007-UNIT         |
| Kraft Tool Co Midget Trowel Carbon Steel - ProForm Handle                   | PL407PF                    | FT4K0023-UNIT         |
| Kraft Tool Co Magnesium Hand Float Square - ProForm Handle                  | CF012PF                    | FT4K0037-UNIT         |
| Kraft Tool Co Magnesium Hand Float Square - ProForm Handle                  | CF016PF                    | FT4K0038-UNIT         |
| Kraft Tool Co Magnesium Hand Float Square - ProForm Handle                  | CF020PF                    | FT4K0039-UNIT         |





| Product Name                                                            | Kraft Tool Co Product Code | Flextool Product Code |
|-------------------------------------------------------------------------|----------------------------|-----------------------|
| Kraft Tool Co Magnesium Hand Float Round - ProForm Handle               | CF076PF                    | FT4K0040-UNIT         |
| Kraft Tool Co Elite Series Magnesium Hand Float Square - Cork Handle    | CFE016K                    | FT4K0041-UNIT         |
| Kraft Tool Co Elite Series Magnesium Hand Float Square - Cork Handle    | CFE020K                    | FT4K0042-UNIT         |
| Kraft Tool Co Mini Magnesium Hand Float Square - ProForm Handle         | CF663PF                    | FT4K0036-UNIT         |
| Kraft Tool Co Orange Thunder Hand Float Square - ProForm Handle         | CF2016PF                   | FT4K0034-UNIT         |
| Kraft Tool Co Orange Thunder Hand Float Square - ProForm Handle         | CF2020PF                   | FT4K0035-UNIT         |
| Kraft Tool Co Resin Hand Float - Proform Handle                         | CF505PF                    | FT4K0043-UNIT         |
| Kraft Tool Co Safety Groover Stainless Steel - ProForm Handle           | CF1131PF                   | FT4K0057-UNIT         |
| Kraft Tool Co Elite Series Hand Groover Bronze - Cork Handle            | CFE303K                    | FT4K0058-UNIT         |
| Kraft Tool Co Elite Series Hand Groover Bronze - Cork Handle            | CFE305K                    | FT4K0059-UNIT         |
| Kraft Tool Co 45 Degree Bevel Edger Stainless Steel - ProForm Handle    | CF192PF                    | FT4K0056-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF163PF                    | FT4K0045-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF092PF                    | FT4K0046-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF172PF                    | FT4K0047-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF173PF                    | FT4K0048-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF165PF                    | FT4K0049-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF101PF                    | FT4K0050-UNIT         |
| Kraft Tool Co Concrete Edger Stainless Steel - ProForm Handle           | CF103PF                    | FT4K0051-UNIT         |
| Kraft Tool Co Safety Step Edger Stainless Steel - ProForm Handle        | CF112PF                    | FT4K0055-UNIT         |
| Kraft Tool Co Elite Series Concrete Edger Blue Steel - Cork Handle      | CFE568K                    | FT4K0052-UNIT         |
| Kraft Tool Co Elite Series Concrete Edger Blue Steel - Cork Handle      | CFE573K                    | FT4K0053-UNIT         |
| Kraft Tool Co Elite Series Concrete Edger Blue Steel - Cork Handle      | CFE577K                    | FT4K0054-UNIT         |
| Kraft Tool Co Inside Corner Step Tool Stainless Steel - ProForm Handle  | CF126PF                    | FT4K0062-UNIT         |
| Kraft Tool Co Inside Corner Step Tool Stainless Steel - ProForm Handle  | CF122PF                    | FT4K0063-UNIT         |
| Kraft Tool Co Outside Corner Step Tool Stainless Steel - ProForm Handle | CF125PF                    | FT4K0060-UNIT         |
| Kraft Tool Co Outside Corner Step Tool Stainless Steel - ProForm Handle | CF121PF                    | FT4K0061-UNIT         |
| Kraft Tool Co Inside Corner Trowel Stainless Steel - ProForm Handle     | PL582PF                    | FT4K0064-UNIT         |
| Kraft Tool Co Inside Corner Trowel Stainless Steel - ProForm Handle     | PL584PF                    | FT4K0065-UNIT         |
| Kraft Tool Co Outside Corner Trowel Stainless Steel - ProForm Handle    | PL592PF                    | FT4K0066-UNIT         |
| Kraft Tool Co Outside Corner Trowel Stainless Steel - ProForm Handle    | PL594PF                    | FT4K0067-UNIT         |
| Kraft Tool Co Walking Edger Stainless Steel                             | CC101-01                   | FT4K0081-UNIT         |
| Kraft Tool Co Walking Edger Stainless Steel                             | CC125-01                   | FT4K0082-UNIT         |
| Kraft Tool Co Walking Groover Bronze                                    | CC303-01                   | FT4K0079-UNIT         |
| Kraft Tool Co Walking Groover Bronze                                    | CC305-01                   | FT4K0080-UNIT         |
| Kraft Tool Co Magnesium Bull Float Round End - Blade only               | CC736-01                   | FT4K0070-UNIT         |
| Kraft Tool Co Magnesium Bull Float Round End - Blade only               | CC803-01                   | FT4K0071-UNIT         |
| Kraft Tool Co Orange Thunder Bull Float Round End - Blade only          | CC2020RE                   | FT4K0072-UNIT         |
| Kraft Tool Co Orange Thunder Bull Float Round End - Blade only          | CC2021RE                   | FT4K0073-UNIT         |

| Product Name                                                              | Kraft Tool Co Product Code | Flextool Product Code |
|---------------------------------------------------------------------------|----------------------------|-----------------------|
| Kraft Tool Co Big D Blue Steel Bull Float Round End - Blade only          | CC748-01                   | FT4K0074-UNIT         |
| Kraft Tool Co Big D Blue Steel Bull Float Round End - Blade only          | CC750-01                   | FT4K0075-UNIT         |
| Kraft Tool Co Walking Trowel Round End Carbon Steel - All-Angle Bracket   | CC849                      | FT4K0068-UNIT         |
| Kraft Tool Co Walking Trowel Round End Carbon Steel - All-Angle Bracket   | CC851                      | FT4K0069-UNIT         |
| Kraft Tool Co Concrete Placing Rake All Aluminium - Foam Grip Handle      | CC964                      | FT4K0100-UNIT         |
| Kraft Tool Co Concrete Placing Rake Steel Blade - Wood Handle             | CC010                      | FT4K0101-UNIT         |
| Kraft Tool Co Concrete Placing Rake Magnesium Blade - Wood Handle         | CC113                      | FT4K0102-UNIT         |
| Kraft Tool Co Concrete Placing Rake - Replacement Wood Handle             | CC107                      | FT4K0103-UNIT         |
| Kraft Tool Co Finishing Broom Soft Nylon                                  | CC457                      | FT4K0083-UNIT         |
| Kraft Tool Co Finishing Broom Weigh-Lite Soft Poly                        | CC156                      | FT4K0084-UNIT         |
| Kraft Tool Co Finishing Broom Weigh-Lite Soft Poly - Replacement Strip    | CC157                      | FT4K0085-UNIT         |
| Kraft Tool Co Anodised Aluminium Handle                                   | CC289SB                    | FT4K0087-UNIT         |
| Kraft Tool Co Anodised Aluminium Handle                                   | CC336B                     | FT4K0088-UNIT         |
| Kraft Tool Co EZY-Tilt Button Handle Adapter                              | CC295                      | FT4K0094-UNIT         |
| Kraft Tool Co Clevis Button Handle Adapter                                | CC284                      | FT4K0089-UNIT         |
| Kraft Tool Co Clevis Button Handle Adapter                                | CC332                      | FT4K0090-UNIT         |
| Kraft Tool Co Double Button Clip - 10 Pack                                | CC289-01                   | FT4K0091-UNIT         |
| Kraft Tool Co Single Button Clip - 10 Pack                                | CC336-01                   | FT4K0092-UNIT         |
| Kraft Tool Co Tilt Float Bracket Kuncklehead Aluminium - 6 hole           | CC296                      | FT4K0077-UNIT         |
| Kraft Tool Co Tilt Float Bracket EZY-Tilt Aluminium - 6 hole              | CC294                      | FT4K0078-UNIT         |
| Kraft Tool Co All-Angle Fresno Bracket                                    | CC298                      | FT4K0095-UNIT         |
| Kraft Tool Co Steel Clevis Wood Handle                                    | CC266                      | FT4K0093-UNIT         |
| Kraft Tool Co Float and Trowel Hook                                       | CF011                      | FT4K0044-UNIT         |
| Kraft Tool Co EZY-Tote Tool Carrier                                       | CC1001                     | FT4K0076-UNIT         |
| Kraft Tool Co Roller Tamp                                                 | CC952B                     | FT4K0086-UNIT         |
| Kraft Tool Co Floor Scraper Steel - T-Handle                              | GG393                      | FT4K0096-UNIT         |
| Kraft Tool Co Floor Scraper Steel - T-Handle                              | GG397                      | FT4K0097-UNIT         |
| Kraft Tool Co Floor Scraper Steel - Replacement Blade                     | GG394                      | FT4K0098-UNIT         |
| Kraft Tool Co Floor Scraper Steel - Replacement Blade                     | GG395                      | FT4K0099-UNIT         |
| Kraft Tool Co Heavy-Duty Pry Bar Little John                              | GG631                      | FT4K0104-UNIT         |
| Kraft Tool Co Heavy-Duty Pry Bar Big John                                 | GG630                      | FT4K0105-UNIT         |
| Kraft Tool Co Rebar Bender                                                | GG629                      | FT4K0106-UNIT         |
| Kraft Tool Co Concrete Knee Board Sliders Plastic                         | CC153                      | FT4K0107-UNIT         |
| Kraft Tool Co Concrete Knee Board Sliders Plastic - Replacement Knee Pads | WL080                      | FT4K0108-UNIT         |
| Kraft Tool Co Tie Wire Reel Aluminium                                     | GG311                      | FT4K0109-UNIT         |
| Kraft Tool Co Tie Wire Twister - Wood Handle                              | GG310                      | FT4K0110-UNIT         |
| Kraft Tool Co Rubbing Block - Plastic Handle                              | CF283                      | FT4K0111-UNIT         |
| Kraft Tool Co Rubbing Block - Plastic Handle                              | CF282                      | FT4K0112-UNIT         |



| Product Name                                              | Kraft Tool Co and W.Rose Product Code | Flextool Product Code |
|-----------------------------------------------------------|---------------------------------------|-----------------------|
| Kraft Tool Co Orange Thunder Trowel Blade - Finishing     | SK100-OT                              | FT4K0113-UNIT         |
| Kraft Tool Co Orange Thunder Trowel Blade - Finishing     | SK214-OT                              | FT4K0114-UNIT         |
| W.Rose Philadelphia Brick Trowel - ProForm Handle         | R0110-12SH                            | FT4K0118-UNIT         |
| W.Rose Philadelphia Brick Trowel - Plastic Handle         | R01410-12                             | FT4K0120-UNIT         |
| W.Rose Philadelphia Brick Trowel - Leather Handle         | R0310-12                              | FT4K0121-UNIT         |
| W.Rose Wide London Brick Trowel - ProForm Handle          | R0112-12SH                            | FT4K0123-UNIT         |
| W.Rose Wide London Brick Trowel - Plastic Handle          | R01412-12                             | FT4K0125-UNIT         |
| W.Rose Wide London Brick Trowel - Leather Handle          | R0312-12                              | FT4K0126-UNIT         |
| W.Rose Narrow London Brick Trowel - ProForm Handle        | R0116-13SH                            | FT4K0127-UNIT         |
| W.Rose Narrow London Brick Trowel - Plastic Handle        | R01416-13                             | FT4K0129-UNIT         |
| W.Rose Narrow London Brick Trowel - Leather Handle        | R0316-13                              | FT4K0130-UNIT         |
| Kraft Tool Co Pointing Trowel - ProForm Handle            | GG422PF                               | FT4K0131-UNIT         |
| Kraft Tool Co Margin Trowel - ProForm Handle              | GG432PF                               | FT4K0132-UNIT         |
| Kraft Tool Co Gauging Trowel Steel Blade - ProForm Handle | GG443PF                               | FT4K0133-UNIT         |
| Kraft Tool Co Caulking Trowel - ProForm Handle            | BL762PF                               | FT4K0134-UNIT         |
| Kraft Tool Co Caulking Trowel - ProForm Handle            | BL764PF                               | FT4K0135-UNIT         |
| Kraft Tool Co Caulking Trowel - ProForm Handle            | BL766PF                               | FT4K0136-UNIT         |
| Kraft Tool Co Brick Jointer 1/2" x 5/8"                   | BL261                                 | FT4K0137-UNIT         |
| Kraft Tool Co Brick Jointer 5/8" x 3/4"                   | BL262                                 | FT4K0138-UNIT         |
| Kraft Tool Co Hubbard Brick Jointer                       | BL280                                 | FT4K0139-UNIT         |
| Kraft Tool Co Hubbard Jointer - Replacement Blade         | BL281                                 | FT4K0140-UNIT         |
| Kraft Tool Co Hubbard Jointer - Replacement Blade         | BL282                                 | FT4K0141-UNIT         |
| Kraft Tool Co Hubbard Jointer - Replacement Blade         | BL283                                 | FT4K0142-UNIT         |
| Kraft Tool Co Hubbard Jointer - Replacement Blade         | BL284                                 | FT4K0143-UNIT         |
| Kraft Tool Co Half Round Sled Runner - ProForm Handle     | BL216PF                               | FT4K0144-UNIT         |
| Kraft Tool Co Tooth Stone Mason's Chisel                  | BL413                                 | FT4K0145-UNIT         |
| Kraft Tool Co Tooth Stone Mason's Chisel                  | BL414                                 | FT4K0146-UNIT         |
| Kraft Tool Co Tooth Stone Mason's Chisel                  | BL415                                 | FT4K0147-UNIT         |
| Kraft Tool Co Plugging Chisel                             | BL576                                 | FT4K0148-UNIT         |
| Kraft Tool Co Jumbo Utility Brush - Red Wood Handle       | BL526                                 | FT4K0149-UNIT         |
| Kraft Tool Co Plastic Acid Brush - Wood Handle            | BL119                                 | FT4K0150-UNIT         |
| Kraft Tool Co Mortar Hoe - Wood Handle                    | BC229                                 | FT4K0152-UNIT         |
| Kraft Tool Co Skate Wheel Joint Raker Aluminium           | BL210                                 | FT4K0153-UNIT         |
| Kraft Tool Co Bricklayer's Hammer                         | BL256                                 | FT4K0154-UNIT         |
| Kraft Tool Co Aluminium Line Level                        | SLSC55                                | FT4K0155-UNIT         |
| Kraft Tool Co Poly-Lined Grout Bag                        | WL010                                 | FT4K0151-UNIT         |

Flextool Brick and Masonry Saw

The Flextool Brick and Masonry Saw FBS-36E offers high precision cutting of bricks and building blocks. A mitre guide and locking mechanism allows for customised and precise cutting on a wide range of angles. Designed with a trolley equipped with pneumatic wheels and handles for easy set up and manoeuvrability. User safety is at the core of its design with debris and blade guards and water flow control system for dust suppression.

This product is eligible for the Flextool Promise.



Blades sold separately.

| Model   | Max Blade Size mm (in) | Max Cutting Depth mm (in) | Max Cutting Length mm (in) | Operating Weight kg (lb) | Lifting Hook | Voltage V/Hz | Max Current A | Power Output kW | Power Output hp | Product Code  |
|---------|------------------------|---------------------------|----------------------------|--------------------------|--------------|--------------|---------------|-----------------|-----------------|---------------|
| FBS-36E | 350 (14)               | 125 (5)                   | 500 (19.7)                 | 110 (330)                | Yes          | 240 50/60    | 10            | 1.7             | 2.3             | FT109503-UNIT |





# Mikasa Floor and Road Saw

The Mikasa Floor and Road Saw MCD-T18H-PLUS sets the standard in precision cutting. Featuring a Honda GX390 engine with cyclonic air filtration system and anti-vibration adjustable handle, it ensures optimum performance and operator comfort. The uniquely designed water pump injection system prevents loss of water pressure and provides consistent water flow for effective dust suppression, while a cutting depth gauge and superior power transmission enhance cutting accuracy. This saw is ideal for a variety of cutting applications in concrete and asphalt.

This product is eligible for the Flextool Promise.

**Anti-vibration and adjustable handle**

- Low vibration handle for reduced hand and arm vibration transfer to the operator
- Height-adjustable handle for improved operator comfort

**Cutting depth gauge with lock**

Equipped with depth control cutting gauge and locking mechanism to ensure precise and accurate cutting and enhance operator safety

**Lifting hook**

Central lifting hook for easy and safe onsite handling

**Cyclonic air filtration system**

For superior air filtration to lengthen service intervals and improve engine protection

**Engine hour meter and tachometer**

Efficiently manage service intervals

**50 Litre integrated water tank**

Large integrated water tank for extended operation

**Safety brake**

Easy to operate foot brake to prevent unwanted movement during operation and transport

**Water pump injection system**

Uniquely designed water injection system which provides consistent water application, ensuring no loss of water pressure throughout the entire cutting process for superior dust suppression

**Blade guard**

Fully removable, ultra-lightweight aluminium blade guard for quick and easy access when changing blades

**Honda GX390 engine**

Provides hassle free operation and low engine emissions

**Superior power transmission**

Special wide profile banded drive belt for maximum power transfer to the cutting blade

**Sealed pulley and belt guard**

Protects against the ingress of dust and other unwanted materials that can prematurely wear out pulley and drive belt components



**POWERED by HONDA**

Blades sold separately.


| Model         | Operating Weight (kg) | Blade Size mm (in) | Max Cutting Depth (mm) | Lifting Hook | Water Tank Capacity (L) | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|---------------|-----------------------|--------------------|------------------------|--------------|-------------------------|-------------|--------------|----------------------|-----------|---------------|
| MCD-T18H-PLUS | 133                   | 460 (18")          | 170                    | Yes          | 50                      | Honda       | GX390        | 13                   |           | FT201693-UNIT |





Flextool BladeTec® Diamond Blades

The Flextool BladeTec Diamond Blade range is designed to the highest standards and for the rigors of commercial and contractor use. The diamond blade range is suitable for a wide range of construction conditions and have been manufactured to endure even the most demanding cutting applications. The Flextool BladeTec Diamond Blade range features high grade steel cores for distortion prevention, high diamond concentration for faster cutting and large segment profiles for longer-lasting performance.

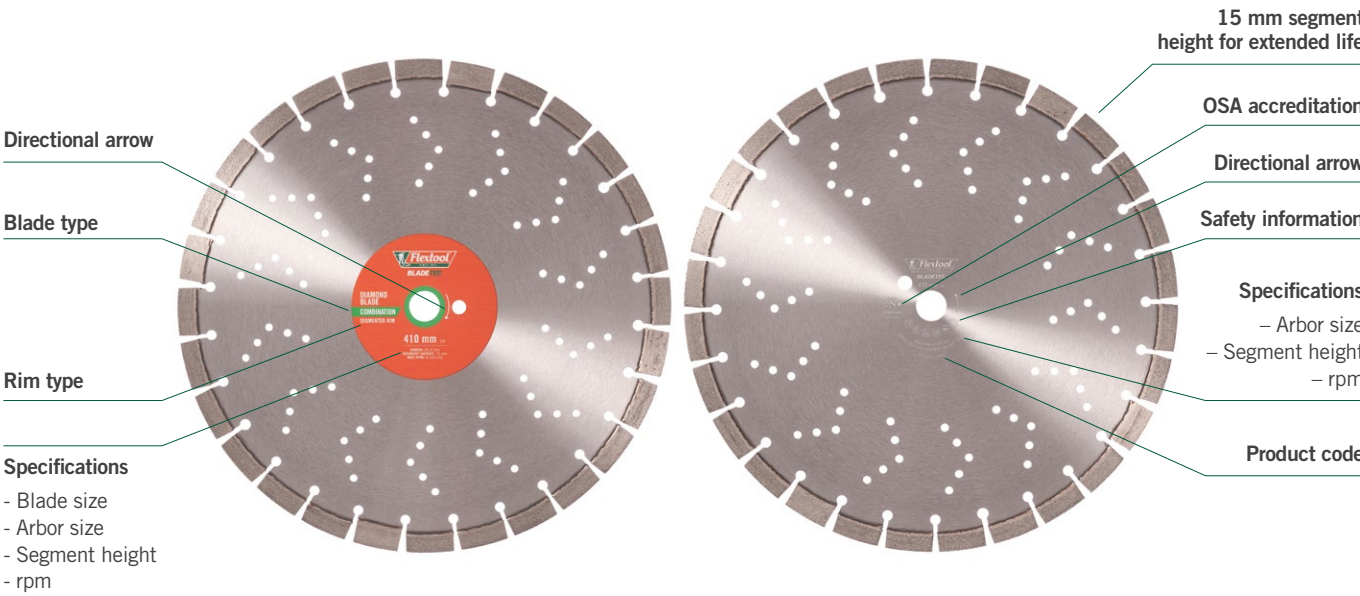

COLOUR GUIDE

- |                              |                      |              |
|------------------------------|----------------------|--------------|
| COMBINATION SEGMENTED RIM    | ALL CUT              | V-SEGMENT    |
| CONCRETE SEGMENTED TURBO RIM | TURBO RIM            | TUCK SEGMENT |
| ASPHALT SEGMENTED TURBO RIM  | TURBO RIM - ABRASIVE | EARLY CUT    |
| BRICK SEGMENTED TURBO RIM    | CONTINUOUS RIM       | BLADE SPACER |

SUITABILITY GUIDE



Flextool BladeTec Diamond Blade Selection Guide

The table below can be used as a guide to select the appropriate blade for the various applications.

| Blade Type          | Asphalt | Turbo Abrasive | Early Cut | Combination | Concrete | Turbo | Brick | All Cut | V-Segment | Tuck Segment | Continuous |
|---------------------|---------|----------------|-----------|-------------|----------|-------|-------|---------|-----------|--------------|------------|
| Segment Type        |         |                |           |             |          |       |       |         |           |              |            |
| Hard Bonds          |         |                |           |             |          |       |       |         |           |              |            |
| Materials           |         |                |           |             |          |       |       |         |           |              |            |
| Abrasive Materials  |         |                |           |             |          |       |       |         |           |              |            |
| Asphalt             | ✓✓      | ✓✓             |           | ✓✓          |          |       |       | ✓       |           |              |            |
| Green concrete      | ✓✓      | ✓✓             | ✓✓        | ✓✓          |          |       |       | ✓       |           |              |            |
| Concrete pavers     | ✓       | ✓✓             |           | ✓✓          |          | ✓     |       | ✓       |           |              |            |
| Sandstone           | ✓       | ✓              |           | ✓✓          |          | ✓✓    |       | ✓       |           |              |            |
| Limestone           |         |                |           | ✓           | ✓        | ✓✓    |       | ✓       |           |              |            |
| Reinforced concrete |         |                |           | ✓           | ✓✓       | ✓✓    |       | ✓       | ✓✓        | ✓✓           |            |
| Slate               |         |                |           |             | ✓        | ✓     | ✓     | ✓       |           |              |            |
| Clay brick          |         |                |           |             |          | ✓✓    | ✓✓    | ✓       |           |              | ✓          |
| Ceramic             |         |                |           |             |          | ✓     |       |         |           |              | ✓✓         |
| Marble              |         |                |           |             |          |       |       |         |           |              | ✓✓         |
| Hard Materials      |         |                |           |             |          |       |       |         |           |              | ✓✓         |
| Granite             |         |                |           |             |          |       |       |         |           |              | ✓✓         |

Most Suited ✓✓ Suited ✓



## COMBINATION SEGMENTED RIM

**Faster cutting** – High diamond concentration  
 “Pattern Segment”  
**Longer-lasting** – Extra segment height  
**Distortion prevention** – High grade steel core  
**Debris clearing** – Key hole gullets  
**Enhanced durability** – Undercut protection segment

**Suitable for**

- Concrete Pavers
- Reinforced Concrete
- Green Concrete
- Asphalt

**Compatible with**

- Brick Saw
- Handheld Saw
- Floor Saw

**Environment**



WET USE



| Description                                                   | Blade Diameter mm (in) | Arbour Size mm (in) | Segment Height mm (in) | Max rpm |  |  |  | Product Code  |
|---------------------------------------------------------------|------------------------|---------------------|------------------------|---------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Combination – Segmented Rim | 320 (12)               | 25.4 (1)            | 15 (0.590)             | 6,300   | ✓                                                                                 | ✓                                                                                 | ✓                                                                                 | FT102309-UNIT |
| Flextool BladeTec Diamond Blade – Combination – Segmented Rim | 360 (14)               | 25.4 (1)            | 15 (0.590)             | 5,460   | ✓                                                                                 | ✓                                                                                 | ✓                                                                                 | FT102310-UNIT |
| Flextool BladeTec Diamond Blade – Combination – Segmented Rim | 410 (16)               | 25.4 (1)            | 15 (0.590)             | 4,725   |                                                                                   | ✓                                                                                 | ✓                                                                                 | FT102311-UNIT |
| Flextool BladeTec Diamond Blade – Combination – Segmented Rim | 460 (18)               | 25.4 (1)            | 15 (0.590)             | 3,395   |                                                                                   |                                                                                   | ✓                                                                                 | FT102312-UNIT |
| Flextool BladeTec Diamond Blade – Combination – Segmented Rim | 520 (20)               | 25.4 (1)            | 15 (0.590)             | 3,055   |                                                                                   |                                                                                   | ✓                                                                                 | FT102313-UNIT |

## CONCRETE SEGMENTED TURBO RIM

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Distortion prevention** – High grade steel core  
**Debris clearing** – Keyhole gullets

**Suitable for**

- Reinforced Concrete
- Concrete Pavers

**Compatible with**

- Brick Saw
- Handheld Saw
- Floor Saw

**Environment**



WET USE



| Description                                                      | Blade Diameter mm (in) | Arbour Size mm (in) | Segment Height mm (in) | Max rpm |  |  |  | Product Code  |
|------------------------------------------------------------------|------------------------|---------------------|------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Concrete – Segmented Turbo Rim | 350 (14)               | 25.4 (1)            | 15 (0.590)             | 5,460   | ✓                                                                                   | ✓                                                                                   | ✓                                                                                   | FT102306-UNIT |
| Flextool BladeTec Diamond Blade – Concrete – Segmented Turbo Rim | 415 (16)               | 25.4 (1)            | 15 (0.590)             | 4,725   |                                                                                     | ✓                                                                                   | ✓                                                                                   | FT102307-UNIT |
| Flextool BladeTec Diamond Blade – Concrete – Segmented Turbo Rim | 450 (18)               | 25.4 (1)            | 15 (0.590)             | 3,395   |                                                                                     |                                                                                     | ✓                                                                                   | FT102308-UNIT |

## ASPHALT SEGMENTED TURBO RIM

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Distortion prevention** – High grade steel core  
**Debris clearing** – Keyhole gullets  
**Enhanced durability** – Undercut protection

**Suitable for**

- Asphalt
- Green Concrete
- Concrete Pavers

**Compatible with**

- Brick Saw
- Handheld Saw
- Floor Saw

**Environment**



WET USE



| Description                                                     | Blade Diameter mm (in) | Arbour Size mm (in) | Segment Height mm (in) | Max rpm |  |  |  | Product Code  |
|-----------------------------------------------------------------|------------------------|---------------------|------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Asphalt – Segmented Turbo Rim | 350 (14)               | 25.4 (1)            | 15 (0.590)             | 5,460   | ✓                                                                                   | ✓                                                                                   | ✓                                                                                   | FT102314-UNIT |
| Flextool BladeTec Diamond Blade – Asphalt – Segmented Turbo Rim | 400 (16)               | 25.4 (1)            | 15 (0.590)             | 4,725   |                                                                                     | ✓                                                                                   | ✓                                                                                   | FT102315-UNIT |
| Flextool BladeTec Diamond Blade – Asphalt – Segmented Turbo Rim | 450 (18)               | 25.4 (1)            | 15 (0.590)             | 3,395   |                                                                                     |                                                                                     | ✓                                                                                   | FT102316-UNIT |

## BRICK SEGMENTED TURBO RIM

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Distortion prevention** – High grade steel core  
**Debris clearing** – Keyhole gullets

**Suitable for**

- Brick
- Reinforced Concrete
- Limestone
- Slate
- Sandstone

**Compatible with**

- Brick Saw
- Handheld Saw

**Environment**



WET USE



| Description                                                            | Blade Diameter mm (in) | Arbour Size mm (in) | Segment Height mm (in) | Max rpm |  |  | Product Code  |
|------------------------------------------------------------------------|------------------------|---------------------|------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Brick – Segmented Turbo Rim          | 350 (14)               | 25.4 (1)            | 15 (0.590)             | 5,460   | ✓                                                                                   | ✓                                                                                   | FT102304-UNIT |
| Flextool BladeTec Diamond Blade – Brick (Silent) – Segmented Turbo Rim | 350 (14)               | 25.4 (1)            | 15 (0.590)             | 5,460   | ✓                                                                                   |                                                                                     | FT102305-UNIT |

## ALL CUT

**Multi-purpose cutting**  
**Superior heat resistance** – Vacuum bonded diamonds  
**Distortion prevention** – High grade steel core

**Suitable for**

- Concrete
- Masonry
- Wood
- Plastic
- PVC
- Steel

**Compatible with**

- Handheld Saw

**Other materials:**

- Copper
- Brick
- Cement sheet
- Asphalt

**Environment**



WET USE



| Description                               | Blade Diameter mm (in) | Arbour Size mm (in) | Segment Height mm (in) | Max rpm |  | Product Code  |
|-------------------------------------------|------------------------|---------------------|------------------------|---------|---------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – All Cut | 355 (14)               | 25.4 (1)            | 12 (0.472)             | 5,460   | ✓                                                                                     | FT102317-UNIT |

## TURBO RIM

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Distortion prevention** – High grade steel core  
**Debris clearing** – Keyhole gullets  
**Enhanced durability** – Undercut protection

**Suitable for**

- Concrete
- Asphalt
- Brick
- Limestone
- Slate
- Sandstone

**Compatible with**

- Angle Grinder
- Tile Saw

**Environment**



WET OR DRY USE



| Description                                 | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  |  | Product Code  |
|---------------------------------------------|------------------------|-----------------------------|------------------------|---------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Turbo Rim | 105 (4)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 15,000  | ✓                                                                                     |                                                                                       | FT102324-UNIT |
| Flextool BladeTec Diamond Blade – Turbo Rim | 125 (5)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 12,000  | ✓                                                                                     |                                                                                       | FT102325-UNIT |
| Flextool BladeTec Diamond Blade – Turbo Rim | 180 (7)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 8,730   | ✓                                                                                     | ✓                                                                                     | FT102326-UNIT |
| Flextool BladeTec Diamond Blade – Turbo Rim | 230 (9)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 6,790   | ✓                                                                                     | ✓                                                                                     | FT102327-UNIT |

### TURBO RIM - ABRASIVE

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Abrasive materials** – Segmented turbo rim  
**Undercut protection** – Extended side segment

**Suitable for**

- Concrete Pavers
- Green Concrete
- Asphalt
- Sandstone

**Compatible with**

- Angle Grinder
- Early Entry Concrete Saw

| Description                                            | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  |  | Product Code  |
|--------------------------------------------------------|------------------------|-----------------------------|------------------------|---------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Turbo Rim – Abrasive | 230 (9)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 6,790   | ✓                                                                                 | ✓                                                                                 | FT102322-UNIT |

Environment



DRY USE



### CONTINUOUS RIM

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Precision cutting** – Reduced chipping

**Suitable for**

- Ceramic Tiles
- Marble
- Granite
- Terracotta

**Compatible with**

- Angle Grinder
- Tile Saw

| Description                                      | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  |  | Product Code  |
|--------------------------------------------------|------------------------|-----------------------------|------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Continuous Rim | 105 (4)                | 22.2 - 15.9 (0.874 - 0.625) | 7 (0.275)              | 5,460   | ✓                                                                                   |                                                                                     | FT102319-UNIT |
| Flextool BladeTec Diamond Blade – Continuous Rim | 125 (5)                | 22.2 - 15.9 (0.874 - 0.625) | 7 (0.275)              | 4,725   | ✓                                                                                   |                                                                                     | FT102320-UNIT |
| Flextool BladeTec Diamond Blade – Continuous Rim | 180 (7)                | 22.2 - 15.9 (0.874 - 0.625) | 7 (0.275)              | 3,395   | ✓                                                                                   | ✓                                                                                   | FT102321-UNIT |

Environment



WET OR DRY USE



### TURBO RIM - ABRASIVE

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Abrasive materials** – Segmented turbo rim  
**Undercut protection** – Extended side segment

**Suitable for**

- Concrete Pavers
- Green Concrete
- Asphalt
- Sandstone

**Compatible with**

- Angle Grinder
- Early Entry Concrete Saw

| Description                                            | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  |  | Product Code  |
|--------------------------------------------------------|------------------------|-----------------------------|------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Turbo Rim – Abrasive | 230 (9)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 6,790   | ✓                                                                                   | ✓                                                                                   | FT102322-UNIT |

Environment



DRY USE



### CONTINUOUS RIM

**Faster cutting** – High diamond concentration  
**Longer-lasting** – Extra segment height  
**Precision cutting** – Reduced chipping

**Suitable for**

- Ceramic Tiles
- Marble
- Granite
- Terracotta

**Compatible with**

- Angle Grinder
- Tile Saw

| Description                                      | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  |  | Product Code  |
|--------------------------------------------------|------------------------|-----------------------------|------------------------|---------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Continuous Rim | 105 (4)                | 22.2 - 15.9 (0.874 - 0.625) | 7 (0.275)              | 5,460   | ✓                                                                                   |                                                                                     | FT102319-UNIT |
| Flextool BladeTec Diamond Blade – Continuous Rim | 125 (5)                | 22.2 - 15.9 (0.874 - 0.625) | 7 (0.275)              | 4,725   | ✓                                                                                   |                                                                                     | FT102320-UNIT |
| Flextool BladeTec Diamond Blade – Continuous Rim | 180 (7)                | 22.2 - 15.9 (0.874 - 0.625) | 7 (0.275)              | 3,395   | ✓                                                                                   | ✓                                                                                   | FT102321-UNIT |

Environment



WET OR DRY USE



### V-SEGMENT

**Crack chasing** – V-segment  
**Longer-lasting** – Larger segment profile  
**Superior durability** – Thick steel core

**Suitable for**

- Crack Chasing

**Compatible with**

- Angle Grinder

| Description                                 | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  | Product Code  |
|---------------------------------------------|------------------------|-----------------------------|------------------------|---------|---------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – V-Segment | 100 (4)                | 22.2 - 15.9 (0.874 - 0.625) | 12 (0.472)             | 15,000  | ✓                                                                                     | FT102328-UNIT |
| Flextool BladeTec Diamond Blade – V-Segment | 125 (5)                | 22.2 - 15.9 (0.874 - 0.625) | 12 (0.472)             | 12,000  | ✓                                                                                     | FT102329-UNIT |
| Flextool BladeTec Diamond Blade – V-Segment | 180 (7)                | 22.2 - 15.9 (0.874 - 0.625) | 12 (0.472)             | 8,730   | ✓                                                                                     | FT102330-UNIT |

Environment



DRY USE



### TUCK SEGMENT

**Joint cleaning** – Super-wide segment  
**Longer-lasting** – Larger segment profile  
**Superior durability** – Thick steel

**Suitable for**

- Mortar Joints

**Compatible with**

- Angle Grinder

| Description                                    | Blade Diameter mm (in) | Arbour Size mm (in)         | Segment Height mm (in) | Max rpm |  | Product Code  |
|------------------------------------------------|------------------------|-----------------------------|------------------------|---------|---------------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Tuck Segment | 105 (4)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 15,000  | ✓                                                                                     | FT102331-UNIT |
| Flextool BladeTec Diamond Blade – Tuck Segment | 125 (5)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 12,000  | ✓                                                                                     | FT102332-UNIT |
| Flextool BladeTec Diamond Blade – Tuck Segment | 180 (7)                | 22.2 - 15.9 (0.874 - 0.625) | 10 (0.393)             | 8,730   | ✓                                                                                     | FT102333-UNIT |

Environment



DRY USE





EARLY CUT

Same day cutting – Green concrete  
Superior durability – Hard bond segment  
Precision cutting – Reduced chipping

Suitable for  
• Green Concrete

Compatible with  
• Early Entry  
Concrete Saw

Environment  
  
DRY USE

| Description                                                                              | Blade Diameter mm (in) | Segment Height mm (in) | Max rpm |  | Product Code  |
|------------------------------------------------------------------------------------------|------------------------|------------------------|---------|-----------------------------------------------------------------------------------|---------------|
| Flextool BladeTec Diamond Blade – Early Cut<br>Anti-ravel skid plate included with blade | 150 (6)                | 12 (0.472)             | 10,185  |  | FT102323-UNIT |



BLADE SPACER

Reduce bore size – to suit 20 mm blade spindles

| Description                                   | Blade Diameter mm (in) | Product Code  |
|-----------------------------------------------|------------------------|---------------|
| Flextool BladeTec Diamond Blade– Blade Spacer | 25.4 -20 (1 - 0.787)   | FT102318-UNIT |



# Smith Performance Sprayers Multi-Use Handheld Sprayer

The Smith Performance Sprayers Multi-Use Handheld Sprayer SMU-1.5 has been built with ease of use and durability at its core. This handheld sprayer is fitted with adjustable brass nozzle, chemical resistant seals and pressure release valve, for reliable continuous spraying. The weighted pick-up hose assures even the last drops of liquid in the tank are used, at every angle.

This small but powerful little unit is extremely versatile and a must-have in every household and trades repertoire. The heavy-duty components make this sprayer suitable for use with a wide range of chemicals commonly used in industries such as cleaning, construction, turf and agriculture, pest control and many more.



# Smith Performance Sprayers Multi-Use Sprayer

The Smith Performance Sprayers Multi-Use Sprayer SMU-8 is a professional grade sprayer built to handle a wide range of spraying applications.

This general-purpose sprayer is fitted with chemical resistant seals and heavy-duty components making it suitable for use with a wide range of chemicals commonly used in industries such as cleaning, construction, turf and agriculture, pest control and many more.



# Smith Performance Sprayers Industrial Concrete Sprayer

The Smith Performance Sprayers Industrial Concrete Sprayer S103E is built to withstand harsh chemicals and is targeted towards contractor or construction work with ease of use and durability at its core. This stainless steel sprayer is fitted with chemical resistant seals and brass components specially designed for contact with acetone, xylene, bond breakers, curing compounds and other concrete chemicals.





# Smith Performance Sprayers Heavy-Duty Backpack Sprayer

The Smith Performance Sprayers Heavy-Duty Backpack Sprayer is a multi-use professional sprayer that combines versatility and performance. Equipped with an 18 V lithium-ion battery and FLOIQ™ variable flow technology, this powerful unit can pump up to 190 Litres of liquid per charge whilst maintaining consistency throughout each application.

With ease of use and durability at its core, this sprayer includes a heavy-duty, kink-resistant hose, poly-lined stainless steel wand and ergonomic padded harness. Its triple filtration system will reduce potential clogging, allowing for continuous operation.

This backpack sprayer is fitted with chemical resistant seals and heavy-duty components making it suitable for use with a wide range of chemicals commonly used in industries such as cleaning, construction, turf and agriculture, pest control and many more.

**Viton seals**

Chemical resistant seals for extended operating life

**Heavy-duty hose system**

1.25 metre heavy-duty reinforced hose with brass swivel connections to prevent kinking

**Sealed battery compartment**

- Provides water resistance and protection for critical components
- Standard charger included

**FLOIQ™ variable flow technology**

- Adjustable flow rate for consistent and repeatable application of a wide range of liquids
- 15 litre tank capacity



**Deluxe padded harness and waist belt**

Provides user comfort for all day use

**Poly-lined stainless steel wand**

- Durable and corrosion resistant
- Equipped with a range of nozzles

**Battery and pump operated**

- 18 V lithium-ion battery and pump system provides consistent spraying pressure
- Pumps up to 190 litres of liquid per charge

S3E-V

## SMITH PERFORMANCE SPRAYER RANGE



Multi-Use Handheld Sprayer SMU-1.5



Multi-Use Sprayer SMU-8



Industrial Concrete Sprayer S103E



Heavy-Duty Backpack Sprayer S3E-V


| Model                              | Tank Capacity L | Hose / Wand Length mm | Seals | Nozzle Type                                                                                         | Weight kg | Operation             | Product Code  |
|------------------------------------|-----------------|-----------------------|-------|-----------------------------------------------------------------------------------------------------|-----------|-----------------------|---------------|
| Multi-Use Handheld Sprayer SMU-1.5 | 1.5             | N/A                   | Viton | Brass Adjustable                                                                                    | 0.5       | Manual hand pump      | FT211502-UNIT |
| Multi-Use Sprayer SMU-8            | 8               | 1250 / 600            | Viton | Brass Adjustable<br>Poly T-Jet Wide Fan<br>Poly T-Jet Narrow Fan<br>Poly Jet Stream<br>Poly Foaming | 1.9       | Manual hand pump      | FT211501-UNIT |
| Industrial Concrete Sprayer S103E  | 13.25           | 1250 / 600            | Viton | Brass T-Jet Wide Fan                                                                                | 6.1       | Manual hand pump      | NP700096-UNIT |
| Heavy-Duty Backpack Sprayer S3E-V  | 15              | 1250 / 600            | Viton | Brass Adjustable<br>Poly T-Jet Wide Fan<br>Poly T-Jet Narrow Fan<br>Poly Jet Stream<br>Poly Foaming | 7.9       | 18 V battery and pump | FT211500-UNIT |



Nozzle types



Deluxe padded harness



ADJUSTABLE BRASS    MAX VOLUME FAN (BROWN)    LOW VOLUME WIDE FAN (RED)    LOW VOLUME NARROW FAN (YELLOW)    JET STREAM    FOAMING    HIGH VOLUME FOAMING

# MQ Whiteman Chemical Spraying System (Mobile Cart)

The MQ Whiteman Chemical Spraying System WSC55 is a superior spraying system designed around mobility and efficiency. The durable cart allows for optimum onsite manoeuvrability whilst carrying up to 200 Litres of material. Featuring a powerful Honda GX160 engine, quick-connect hose fittings and sloped chemical platform, this unit offers various time and cost savings. A small built-in compressor allows the operator to clear and reuse the leftover product in the hose that would normally be discarded, greatly reducing maintenance and waste.

This product is eligible for the Flextool Promise.



| Model | Operating Weight (kg) | Litres Per Minute | PSI | Solids Capacity | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|-------|-----------------------|-------------------|-----|-----------------|-------------|--------------|----------------------|-----------|---------------|
| WSC55 | 131                   | 26.5              | 125 | 25%             | Honda       | GX160        | 5.5                  | P         | FT269039-UNIT |

## EXTENSION HOSE ASSEMBLY

| Model | Length (m) | Product Code  |
|-------|------------|---------------|
| SH150 | 45         | FT269041-UNIT |




WSC55  
Drum size variations

MQ Whiteman products are only available through authorised dealers in Australia. Go to [flextool.com.au/stockists](http://flextool.com.au/stockists) to find your nearest MQ Whiteman authorised dealer.

# MQ Whiteman Chemical Spraying System (Barrel Mount)

The MQ Whiteman Chemical Spraying System WSC55BM is a powerful spraying system designed to securely attach to a 200 Litre drum. It features a strong, lightweight frame design, Honda GX160 engine and heavy-duty pump. The quick-connect hose fittings allow for simple and fast set up and disassembly. Engineered around durability and efficiency, this unit is ideal for a wide range of industries and applications.

This product is eligible for the Flextool Promise.

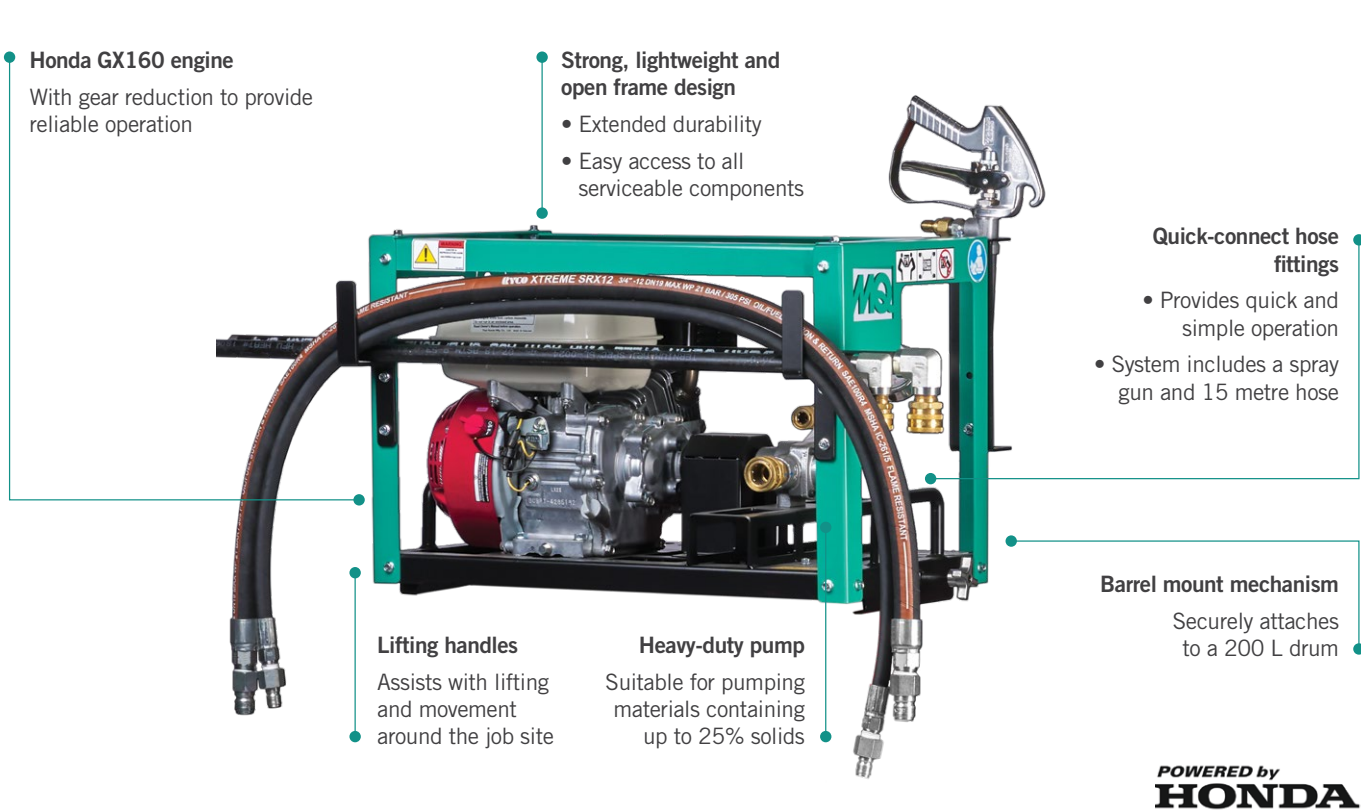

| Model   | Operating Weight (kg) | Litres Per Minute | PSI | Solids Capacity | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|---------|-----------------------|-------------------|-----|-----------------|-------------|--------------|----------------------|-----------|---------------|
| WSC55BM | 37                    | 26.5              | 125 | 25%             | Honda       | GX160        | 5.5                  | P         | FT269040-UNIT |

## EXTENSION HOSE ASSEMBLY

| Model | Length (m) | Product Code  |
|-------|------------|---------------|
| SH150 | 45         | FT269041-UNIT |



WSC55BM  
Barrel mounted



Flextool Pressure Cleaners

Flextool Pressure Cleaners are engineered for high-performance cleaning in demanding commercial environments. Featuring a robust, heavy-duty steel frame and quality Annovi Reverberi pump with solid brass head and ceramic pistons, the Flextool Pressure Cleaner range delivers reliable results across a range of applications and industries.

The flat-free, all-terrain wheels provide enhanced manoeuvrability and stability while the adjustable detergent injection system allows operators to shift from heavy degreasing to final rinse without slowing down.

The Flextool FPC-4000 is powered by a Honda GX390 for reliable operation, producing a powerful 4000 psi working pressure at 15 L/min, rapidly cutting through stubborn build-up while maintaining consistent output.

These products are eligible for the Flextool Promise.

**15 metre heavy-duty hose**

- 3/8" wire braided high-pressure hose with swivel and quick-release fittings
- Hose hook for easy transport and storage

**Easy access nozzle holder**

- Integrated spray nozzle holder for quick and convenient access
- Five spray nozzles included

**Heavy-duty spray gun and lance**

- Ergonomic design for user comfort
- Quick-release fittings for easy nozzle change over

**Honda GX390 engine**

Provides hassle free operation and low engine emissions

**Heavy-duty frame**

30 mm steel frame for durability and safe handling

**Flat-free all-terrain wheels**

- Puncture-proof, over-sized, solid treaded tires
- Enhanced manoeuvrability and stability

**Annovi Reverberi pump**

- Triplex oil bath piston plunger
- Solid brass head and ceramic pistons for long service life

**Fast flow rate**

4000 psi working pressure at 15 litres per minute for fast cleaning

**Detergent injection system**

Fully adjustable system for all cleaning requirements



FPC-4000

FLEXTOOL PRESSURE CLEANERS



| Model    | Operating Weight kg (lb) | Pump Pressure psi | Flow Rate lpm | Pump Speed rpm | Pump Type                          | Hose Length m | Nozzle Type   | Engine Make | Engine Model | Max Rated Power hp | Fuel Type | Product Code  |
|----------|--------------------------|-------------------|---------------|----------------|------------------------------------|---------------|---------------|-------------|--------------|--------------------|-----------|---------------|
| FPC-3000 | 38 (83.7)                | 3000              | 9.5           | 3400           | Annovi Reverberi RSV3G30 – Triplex | 15            | Snap-On 5 pcs | Honda       | GX200        | 6.5                |           | FT2HIJ01-UNIT |
| FPC-4000 | 63 (138.9)               | 4000              | 15            | 3400           | Annovi Reverberi RSV4G40 – Triplex | 15            | Snap-On 5 pcs | Honda       | GX390        | 13                 |           | FT2HIJ02-UNIT |

FLEXTOOL PRESSURE CLEANER ACCESSORIES

| Description                                         | Product Code  | Included with FPC-3000 Product Purchase | Included with FPC-4000 Product Purchase | Compatible with FPC-3000 | Compatible with FPC-4000 |
|-----------------------------------------------------|---------------|-----------------------------------------|-----------------------------------------|--------------------------|--------------------------|
| 1 FLEXTOOL PRESSURE CLEANER TRIGGER GUN             | FT2HIJ03-UNIT | ✓                                       | ✓                                       | ✓                        | ✓                        |
| 2 FLEXTOOL PRESSURE CLEANER LANCE ASSEMBLY          | FT2HIJ04-UNIT | ✓                                       | ✓                                       | ✓                        | ✓                        |
| 3 FLEXTOOL PRESSURE CLEANER HOSE ASSY 15 METRE      | FT2HIJ05-UNIT | ✓                                       | ✓                                       | ✓                        | ✓                        |
| 4 FLEXTOOL PRESSURE CLEANER NOZZLE KIT (3000 PSI)   | FT2HIJ06-UNIT | ✓                                       | ✗                                       | ✓                        | ✗                        |
| 5 FLEXTOOL PRESSURE CLEANER TURBO NOZZLE (3000 PSI) | FT2HIJ08-UNIT | ✗                                       | ✗                                       | ✓                        | ✗                        |
| 6 FLEXTOOL PRESSURE CLEANER ROTARY HEAD 450 MM      | FT2HIJ09-UNIT | ✗                                       | ✗                                       | ✓                        | ✓                        |
| 7 FLEXTOOL PRESSURE CLEANER NOZZLE KIT (4000 PSI)   | FT2HIJ10-UNIT | ✗                                       | ✓                                       | ✗                        | ✓                        |
| 8 FLEXTOOL PRESSURE CLEANER TURBO NOZZLE (4000 PSI) | FT2HIJ11-UNIT | ✗                                       | ✗                                       | ✗                        | ✓                        |









Flextool PortaGrind®

The Flextool PortaGrind FCG-125 is a compact and powerful handheld concrete grinder, purpose-built for edge work and tight access grinding applications. This portable unit is perfect for grinding along walls, slab edges, around columns, and in hard-to-reach spaces where larger machines can't go.

Fitted with a 1500 W electric motor featuring a soft start function, the Flextool PortaGrind delivers efficient, controlled grinding performance. The variable speed dial allows users to adjust grinding speed from 3000 to 8500 rpm, ensuring optimal results across a variety of surfaces and materials.

This product is eligible for the Flextool Promise.

**Powerful 1500 W motor**  
Provides efficient and consistent grinding performance, ideal for demanding edge and corner work

**Ergonomic D-handle design**  
Provides improved comfort, control, and stability – especially in tight or awkward spaces

**Variable speed control**

- Enables precise adjustment of the grinding speed to suit a wide range of materials and grinding applications
- 3000 to 8500 rpm

**Soft-start function**  
Reduces start-up torque for smoother operation and extended motor life

**Floating dust shroud with 32 mm vacuum outlet**  
Maintains close contact with the surface for effective dust extraction when connected to a dust collector

**Safety trigger system**  
Dual switch function provides enhanced safety preventing unwanted start-up

**Convertible dust shroud**  
Hinged shroud design enables precise edge grinding for clean, professional results

**Spindle lock mechanism**  
Quick and hassle-free cup wheel changes



| Model   | Grinding Width mm (in) | Operating Weight kg (lb) | Voltage V/Hz | Power W | Grinding Speed rpm | Spindle / Arbor Size mm (in) | Dust Outlet mm (in) | Power Cord Length m (ft) | Product Code  |
|---------|------------------------|--------------------------|--------------|---------|--------------------|------------------------------|---------------------|--------------------------|---------------|
| FCG-125 | 125 (5)                | 3.85 (8.5)               | 240 50       | 1500    | 3000 to 8500       | 22.2 (0.87)                  | 32 (1.26)           | 2.5 (8.2)                | FT100509-UNIT |

Flextool Single Head Concrete Grinder

The Flextool Single Head Concrete Grinder FCG-250 is compact in design and delivers exceptional grinding capability. The combination of the direct drive system and the motor positioned directly over the grinding head, allow for efficient and aggressive grinding. Designed for professionals, the FCG-250 has a detachable grinding head for easier transportation, a folding handle with adjustable handlebar, easy access control panel and a central lifting hook.

The innovative floating grinding head with self-levelling pivot follows the floor profile, which promotes even wear of the grinding shoes. A floating dust shroud gives a tight seal, capturing harmful dust from escaping the grinding head.

Changing grinding shoes is fast and hassle-free with the Easy Lock tooling system. Compatible with the Redi Lock system, this machine comes standard with a grinding shoe adaptor plate.

This machine is ideal for small and medium domestic or commercial projects, where coating removal, levelling high spots, or general concrete grinding and surface preparation are needed.

This product is eligible for the Flextool Promise.

**Adjustable handlebar**  
Reversible with 3-way height adjustment for superior ergonomics

**Easy operator control**  
Control panel positioned within easy reach for optimised control and safety

**Folding handle**  
3 locking positions for transport and storage, changing of consumables and operation

**Detachable grinding head**  
Quickly and easily separate the grinding head and motor from the main chassis for easier handling, transportation and storage

**Easy Lock grinding shoe adaptor plate included**

- Fast and hassle-free changeover of grinding shoes
- Compatible with universal Redi Lock system
- Can also be operated with 250 mm (10 inch) grinding plates

**Dust management system**  
Equipped with dual shrouds (full seal and edge grinding), 50 mm vacuum port, and water inlet for ultimate dust control

**Single phase electric motor**  
1.8 kW electric motor for use with standard 10 amp power outlet

**Direct drive system**  
Delivers optimum grinding efficiency with full motor weight directly over the grinding head

**Floating head**  
Self-levelling pivot follows the floor profile promoting even wear of the grinding shoes and plates

**Lifting hook**  
Central lifting hook for easy and safe onsite handling

**Single Head GRINDER**



| Model   | Grinding Width mm (in) | Operating Weight kg (lb) | Voltage V/Hz | Max Current A | Power Output kW | Power Output hp | Grinding Speed rpm | IP Rating | Dust Outlet mm (in) | Lifting Hook | Grinding Shoes                    | Power Cord Length m (ft) | Product Code  |
|---------|------------------------|--------------------------|--------------|---------------|-----------------|-----------------|--------------------|-----------|---------------------|--------------|-----------------------------------|--------------------------|---------------|
| FCG-250 | 250 (10)               | 76 (167.5)               | 240 50/60    | 9.8           | 1.8             | 2.4             | 1400               | 55        | 50 (2)              | Yes          | Easy Lock (Redi Lock Compatible)* | 0.3 (1)                  | FT100601-UNIT |

The FCG-250 must be used with a heavy-duty extension lead with a minimum 3 x 1.5 mm2 cable which does not exceed 20 metre in length.

\* The FCG-250 comes standard with an adaptor plate.



# Flextool Planetary Concrete Grinder

The Flextool Planetary Concrete Grinder FCG-450 is compact in design and delivers exceptional grinding and polishing capability. Grinding efficiency is optimised through the placement of the motor directly above the grinding head, providing extra weight during operation. Additional weight can be added by moving adjustable head weights into position.

Featuring a height-adjustable handle, easy access control panel and central lifting hook, this machine is designed with the user in mind. The fully sealed aluminium gearbox provides enhanced durability and reduced maintenance. The floating dust shroud gives a tight seal, capturing harmful dust from escaping the grinding head.

This grinder is ideal for small to medium size projects on residential or custom commercial work.

This product is eligible for the Flextool Promise.



**PLANETARY GRINDER**

- Adjustable handlebar**  
Reversible with 3-way height adjustment for superior ergonomics
- Variable speed**  
Allows operator to adjust grinding speed from 300 to 1800 rpm
- Easy operator control**  
Control panel positioned within easy reach for optimised control and safety
- Folding handle**  
3 locking positions for transport and storage, changing of consumables and operation
- Adjustable grinding head weights**  
Two adjustable grinding head weights to increase pressure for improved grinding efficiency and performance
- Dust management system**  
Floating dust shroud gives a tight seal, capturing harmful dust from escaping the grinding head. Fitted with 50 mm outlet for connection to vacuum system
- Lifting hook**  
Central lifting hook for easy and safe onsite handling
- Electric motor and inverter**  
2.2 kW electric motor and inverter system for use with standard 10 amp power outlet
- Fully sealed aluminium gearbox**  
Provides enhanced durability and reduced maintenance (no drive belts)
- Detachable grinding head**  
Quickly and easily separate the grinding head and motor from the main chassis for easier handling, transportation and storage

| Model   | Grinding Width mm (in) | Operating Weight kg (lb) | Voltage V/Hz | Max Current A | Power Output kW | Power Output hp | Grinding Speed rpm | IP Rating | Dust Outlet mm (in) | Lifting Hook | Grinding Shoes                   | Power Cord Length m (ft) | Product Code  |
|---------|------------------------|--------------------------|--------------|---------------|-----------------|-----------------|--------------------|-----------|---------------------|--------------|----------------------------------|--------------------------|---------------|
| FCG-450 | 450 (18)               | 145 (320)                | 240 50/60    | 9.57          | 2.2             | 3               | 300 to 1800        | 55        | 50 (2)              | Yes          | Easy Lock (Redi-Lock Compatible) | 0.3 (1)                  | FT100600-UNIT |

The FCG-450 must be used with a heavy-duty extension lead with a minimum 3 x 1.5 mm<sup>2</sup> cable which does not exceed 20 metre in length.  
The FCG-450 comes standard with 9 resin adaptors.





Flextool BladeTec® Diamond Cup Wheels

The Flextool BladeTec Diamond Cup Wheel range is designed to the highest standards and for the rigors of commercial and contractor use. The Diamond Cup Wheel range is suitable for a wide range of construction conditions and have been manufactured to endure even the most demanding grinding applications. The Flextool BladeTec Diamond Cup Wheel range features a high diamond concentration for fast grinding and larger segment profiles for longer-lasting performance.



Suitability guide



ANGLE GRINDER

FLEXTOL BLADETEC DIAMOND CUP WHEEL – TURBO SEGMENT

The Flextool BladeTec Turbo Segment Diamond Cup Wheel is designed for removal of a wide range of construction materials and features a high diamond concentration and larger segment profiles, allowing for fast grinding and extended life. The coarse or fine grit diamonds provide aggressive removal of concrete and creates a smooth or extra smooth finish.

The Flextool BladeTec Turbo Segment Diamond Cup Wheel is suitable for angle grinders. This cup wheel can be used on materials such as concrete, bricks and asphalt.

| Description                                         | Grit Size | Cup Wheel Diameter<br>mm (in) | Arbour Size<br>mm | Pack Qty | Product Code  |
|-----------------------------------------------------|-----------|-------------------------------|-------------------|----------|---------------|
| Flextool BladeTec Diamond Cup Wheel – Turbo Segment | Course    | 100<br>(4)                    | 22.2/16           | 1        | FT102334-UNIT |
| Flextool BladeTec Diamond Cup Wheel – Turbo Segment | Fine      | 100<br>(4)                    | 22.2/16           | 1        | FT102335-UNIT |
| Flextool BladeTec Diamond Cup Wheel – Turbo Segment | Course    | 125<br>(5)                    | 22.2              | 1        | FT102336-UNIT |
| Flextool BladeTec Diamond Cup Wheel – Turbo Segment | Fine      | 125<br>(5)                    | 22.2              | 1        | FT102337-UNIT |
| Flextool BladeTec Diamond Cup Wheel – Turbo Segment | Course    | 180<br>(7)                    | 22.2              | 1        | FT102338-UNIT |
| Flextool BladeTec Diamond Cup Wheel – Turbo Segment | Fine      | 180<br>(7)                    | 22.2              | 1        | FT102339-UNIT |



FLEXTOL BLADETEC DIAMOND CUP WHEEL – SPIRAL SEGMENT

The Flextool BladeTec Spiral Segment Diamond Cup Wheel is designed for removal of a wide range of construction materials and features a high diamond concentration and larger segment profiles, allowing for super-fast grinding and extended life. The spiral segment design provides ultra-aggressive removal of concrete.

The Flextool BladeTec Spiral Segment Diamond Cup Wheel is suitable for angle grinders. This cup wheel can be used on materials such as concrete, bricks and asphalt.

| Description                                          | Cup Wheel Diameter<br>mm (in) | No. of<br>Segments | Arbour Size<br>mm | Pack Qty | Product Code  |
|------------------------------------------------------|-------------------------------|--------------------|-------------------|----------|---------------|
| Flextool BladeTec Diamond Cup Wheel - Spiral Segment | 100<br>(4)                    | 9                  | 22.2/16           | 1        | FT102340-UNIT |
| Flextool BladeTec Diamond Cup Wheel - Spiral Segment | 125<br>(5)                    | 9                  | 22.2              | 1        | FT102341-UNIT |
| Flextool BladeTec Diamond Cup Wheel - Spiral Segment | 180<br>(7)                    | 12                 | 22.2              | 1        | FT102342-UNIT |



FLEXTOL BLADETEC DIAMOND CUP WHEEL – PCD SEGMENT

The Flextool BladeTec Poly Crystalline Diamond (PCD) Cup Wheel is specifically designed for rapid removal of excessively built up glues and epoxies on concrete surfaces. The low heat generation design allows for quick and easy floor coating removal.

The Flextool BladeTec Poly Crystalline Diamond (PCD) Cup Wheel is suitable for angle grinders. This cup wheel can be used to remove materials such as epoxy, urethane, paints, glues, acrylics and waterproofing membranes.

| Description                               | Cup Wheel Diameter<br>mm (in) | No. of<br>Segments | Arbour Size<br>mm | Pack Qty | Product Code  |
|-------------------------------------------|-------------------------------|--------------------|-------------------|----------|---------------|
| Flextool BladeTec Diamond Cup Wheel – PCD | 125<br>(5)                    | 12                 | 22.2              | 1        | FT102343-UNIT |
| Flextool BladeTec Diamond Cup Wheel – PCD | 175<br>(7)                    | 24                 | 22.2              | 1        | FT102344-UNIT |



FLEXTOL BLADETEC EASY LOCK GRINDING SHOES

The Flextool BladeTec Easy Lock Grinding Shoes feature a high diamond concentration and large segment size for optimum grinding efficiency and durability. The Easy Lock system allows for quick and easy connection and is compatible with Redi Lock systems.

These grinding shoes are suitable for use on a range of concrete types including soft, medium, hard, and very hard. Depending on the grit size that is used, the grinding shoes can achieve both course and smooth finishes. PCD and Arrow segment shoes are also available for the removal of thick or thin surface coatings, such as glues or paints.

Compatible with a wide range of grinding equipment.


| Application                    | Colour | Bond Type      | Number of Segments | Diamond Grit Size | Pack Qty | Product Code  |
|--------------------------------|--------|----------------|--------------------|-------------------|----------|---------------|
| Soft Concrete                  | Black  | Hard Bond      | 2                  | 16 grit           | 3        | FT100473-UNIT |
|                                |        |                |                    | 40 grit           | 3        | FT100474-UNIT |
|                                |        |                |                    | 80 grit           | 3        | FT100475-UNIT |
|                                |        |                |                    | 100 grit          | 3        | FT100476-UNIT |
| Medium Hardness Concrete       | Silver | Medium Bond    | 2                  | 16 grit           | 3        | FT100477-UNIT |
|                                |        |                |                    | 40 grit           | 3        | FT100478-UNIT |
|                                |        |                |                    | 80 grit           | 3        | FT100479-UNIT |
|                                |        |                |                    | 100 grit          | 3        | FT100480-UNIT |
| Hard Concrete                  | White  | Soft Bond      | 2                  | 16 grit           | 3        | FT100481-UNIT |
|                                |        |                |                    | 40 grit           | 3        | FT100482-UNIT |
|                                |        |                |                    | 80 grit           | 3        | FT100483-UNIT |
|                                |        |                |                    | 100 grit          | 3        | FT100484-UNIT |
| Very Hard Concrete             | Gold   | Very Soft Bond | 1                  | 16 grit           | 3        | FT100485-UNIT |
|                                |        |                |                    | 40 grit           | 3        | FT100486-UNIT |
|                                |        |                |                    | 80 grit           | 3        | FT100487-UNIT |
|                                |        |                |                    | 100 grit          | 3        | FT100488-UNIT |
| Thick Coatings (Epoxy, Glue)   | Red    | PCD            | 3                  | N/A               | 3        | FT100489-UNIT |
| Thin Coatings (Paint, Sealant) |        | Soft Bond      | 2                  | 16 grit           | 3        | FT100490-UNIT |



FLEXTOL BLADETEC QUICK-FIT GRINDING SHOE

Flextool BladeTec Quick-Fit grinding shoes are available in a number of bond hardness for use on materials ranging from soft and porous surfaces such as rain damaged concrete and asphalt, super hard cured concrete and for the removal of epoxies and glues. Grit sizes from 16 through to 150 are available to achieve course surface finishes for overlay with thick epoxies, cement based floor coatings or for a non-slip finish through to fine finishes for semi-polished concrete or for thin floor coatings. Quick-Fit shoes provide super quick tool free knock-in and knock-out changeover of grinding shoes.

| Application                  | Colour | Number of Segments | Diamond Grit Size | Pack Qty | Product Code  |
|------------------------------|--------|--------------------|-------------------|----------|---------------|
| Hard, Cured Concrete Floors  | White  | 2                  | 20 grit           | 1        | FT1EHC20-UNIT |
| Hard, Cured Concrete Floors  | White  | 2                  | 30/40 grit        | 1        | FT124716-UNIT |
| Medium Hardness Concrete     | Grey   | 2                  | 30/40 grit        | 1        | FT124648-UNIT |
| Thick Coatings (Epoxy, Glue) | White  | 2                  | PCD               | 1        | FT1UBPCD-UNIT |




FLEXTOL BLADETEC EASY LOCK ADAPTOR PLATE - 250 MM

The Flextool BladeTec Adaptor Plate 250 mm is suitable for use with most 250 mm single head or cub style concrete grinders. Made from solid steel, this adaptor plate is zinc plated to protect against corrosion.

This adaptor plate holds six Flextool Easy Lock Grinding Shoes and is compatible with the Redi Lock system.

No special tooling required.

| Application                                | Diameter mm (in) | No. of shoes           | Compatibility                        | Pack Qty | Product Code  |
|--------------------------------------------|------------------|------------------------|--------------------------------------|----------|---------------|
| Adaptor plate for Easy Lock grinding shoes | 250 (10)         | Holds 6 grinding shoes | Easy Lock System<br>Redi Lock System | 1        | FT100602-UNIT |



FLEXTOL BLADETEC GRINDING PLATE - 250 MM

The Flextool BladeTec Grinding Plate features a high diamond concentration and large segment size for optimum grinding efficiency and durability. The soft bond arrow segments allow for aggressive grinding and make this plate suitable for a wide range of general purpose applications.

The Flextool BladeTec Grinding Plate is compatible with single head grinders.

| Application                       | Diameter mm (in) | Colour | Bond Type | Number of Segments | Diamond Grit Size | Pack Qty | Product Code  |
|-----------------------------------|------------------|--------|-----------|--------------------|-------------------|----------|---------------|
| General Purpose Concrete Grinding | 250 (10)         | White  | Soft Bond | 15                 | 30/40 grit        | 1        | FT100472-UNIT |



FLEXTOL BLADETEC DRY POLISHING RESINS

The Flextool BladeTec Dry Polishing Resins achieve optimum polishing efficiency and enhanced polishing clarity with minimal passes. These quality resins are highly durable and longer-lasting. Featuring velcro backing pads for easy connection, the Flextool BladeTec Polishing Resins are compatible with a wide range of equipment. These dry polishing resins are available in 50, 100, 200, 400, 800, 1500 and 3000 grit.


| Application        | Colour     | Size mm (in)            | Diamond Grit Size | Pack Qty | Product Code  |
|--------------------|------------|-------------------------|-------------------|----------|---------------|
| Concrete Polishing | Navy Blue  | 80 x 9<br>(3.14 x 0.35) | 50 grit           | 9        | FT100491-UNIT |
|                    | Yellow     |                         | 100 grit          | 9        | FT100492-UNIT |
|                    | Orange     |                         | 200 grit          | 9        | FT100493-UNIT |
|                    | Red        |                         | 400 grit          | 9        | FT100494-UNIT |
|                    | Green      |                         | 800 grit          | 9        | FT100495-UNIT |
|                    | Light Blue |                         | 1500 grit         | 9        | FT100496-UNIT |
|                    | Brown      |                         | 3000 grit         | 9        | FT100497-UNIT |



FLEXTOL BLADETEC GRINDING WEDGE BLOCK

Flextool BladeTec Grinding Wedge Blocks with four segments are available with two different bond types. White wedges are a medium bond suitable for general grinding of medium to hard concrete. Black Block Wedges are the hardest of the bonds suitable for freshly laid or abrasive concrete. Can be used wet or dry commonly on the Flextool terrazzo grinder.

| Description                                    | Specification    | Pack Qty | Product Code  |
|------------------------------------------------|------------------|----------|---------------|
| Flextool BladeTec Grinding Diamond Wedge White | 4 x 12 x 12 x 40 | 1        | FT10DWHC-UNIT |
| Flextool BladeTec Grinding Diamond Wedge Black | 4 x 12 x 12 x 40 | 1        | FT10DWHS-UNIT |





# Flextool PortaVac

The Flextool PortaVac FDC-1A1P is a lightweight, highly portable dust collector engineered for smaller surface preparation tasks and edge grinding. Featuring a powerful 1200 W motor for increased airflow and a high-quality H-Class HEPA filtration system for reliable and high-performing air filtration for a wide range of projects.

Designed to capture the finest concrete and silica dust particles, the Flextool PortaVac FDC-1A1P is an auto-pulsing dust collector, using patented auto-pulsing technology for 100% uninterrupted working and no manual filter cleaning. It comes standard with a range of accessories and filters.

Ideal for edge grinding, tight workspaces, continuous tool operation, and safe onsite dust management.

This product is eligible for the Flextool Promise.



**Lifting handle**  
Central lifting handle for easy and safe onsite handling

**Auto-pulsing technology**

- Provides reliable and efficient continuous filter cleaning during operation and ensures 100% uninterrupted working
- No manual cleaning

**38 Litre tank capacity**  
Portable and robust design with generous capacity for dust collecting and cleaning applications

**Solid and smooth wheels with brake system**

- High-quality wheels for easy manoeuvrability
- Brake system for safe, stable positioning during operation

**HEPA filtration system**

- Compliant with H-Class standards for optimum air filtration and capture of the finest concrete and silica dust particles
- Captures 99.97% of particles  $\geq 0.3$  microns

**Single Ametek motor**  
Delivers strong, continuous suction performance

FDC-1A1P

\* For dry use only, must not be used wet. If used wet, filters will need to be replaced.

# Flextool Dust Collector

Flextool Dust Collectors are specifically designed for the rigors of commercial and contractor use. Featuring powerful twin-motors for increased airflow, high-quality H-Class HEPA filtration systems and efficient continuous bagging systems, they provide reliable and high-performing air filtration for a wide range of projects.

The Flextool Dust Collector FDC-1A2 is a twin-motor, auto-pulsing dust collector, using patented auto-pulsing technology for 100% uninterrupted working and no manual filter cleaning. Designed to capture the finest concrete and silica dust particles, it offers exceptional performance capabilities and comes standard with a full suite of accessories.

This product is eligible for the Flextool Promise.



**Auto-pulsing technology**

- Provides reliable and efficient continuous filter cleaning during operation and ensures 100% uninterrupted working
- No manual cleaning

**Dust inlet port**  
Integrated closing mechanism prevents dust escape when hose is disconnected, ensuring a cleaner and safer work environment

**Continuous bagging system**  
Clean and efficient management, storage and disposal of captured material

**Solid and smooth wheels**  
Quality wheels with brake system for easy and safe manoeuvrability

**HEPA filtration system**

- Compliant with H-Class standards for optimum air filtration and capture of the finest concrete and silica dust particles
- Captures 99.99% of particles  $\geq 0.3$  microns

**Dual Ametek motor**

- Continuous high-performance operation
- Ideal for use with grinders with a working width of up to 600 mm

FDC-1A2

FLEXTOOL DUST COLLECTORS



FDC-1A1P

FDC-1A2

| Model    | Operating Weight kg (lb) | Voltage V/Hz | Motor W  | Current A | Air Flow m³/h (ft³/h) | Vacuum mbar | Vacuum Hose Diameter mm (in) | Pre Filter Type | Filtration Type | Filter Cleaning          | Dust Collection                     | Power Cord Length m (ft) | Product Code  |
|----------|--------------------------|--------------|----------|-----------|-----------------------|-------------|------------------------------|-----------------|-----------------|--------------------------|-------------------------------------|--------------------------|---------------|
| FDC-1A1P | 13.5 (29.8)              | 240 50/60    | 1 x 1200 | 5.2       | 262 (9252)            | 250         | 35 (1.4)                     | N/A             | 2 x H-Class H13 | Auto-pulsing (automatic) | Bagging system (Non-continuous)     | 8 (26.25)                | FT100500-UNIT |
| FDC-1A2  | 53 (116.8)               | 240 50/60    | 2 x 1200 | 9.6       | 400 (14,126)          | 240         | 50 (2)                       | 2 x H-Class H11 | 2 x H-Class H13 | Auto-pulsing (automatic) | Continuous drop-down bagging system | 8 (26.25)                | FT100463-UNIT |

\* FDC-1A2 previously known as FDC-1A

FLEXTOOL PORTAVAC COMPONENTS

| Description                                         | Product Code  | Included with FDC-1A1P |
|-----------------------------------------------------|---------------|------------------------|
| 1 FLEXTOOL PORTAVAC ALUMINIUM WAND 35 MM            | FT100501-UNIT | ✓                      |
| 2 FLEXTOOL PORTAVAC WAND BEND 35 MM                 | FT100502-UNIT | ✓                      |
| 3 FLEXTOOL PORTAVAC FLOOR TOOL 35 MM / 300 MM       | FT100503-UNIT | ✓                      |
| 4 FLEXTOOL PORTAVAC CREVISE NOZZLE 35 MM            | FT100504-UNIT | ✓                      |
| 5 FLEXTOOL PORTAVAC H-CLASS FILTER BAG 5-PACK       | FT100505-UNIT | ✓*                     |
| 6 FLEXTOOL PORTAVAC STANDARD FILTER BAG 20-PACK     | FT100506-UNIT | ✓*                     |
| 7 FLEXTOOL PORTAVAC HEPA FILTER H-CLASS             | FT100507-UNIT | ✓                      |
| 8 FLEXTOOL PORTAVAC CONDUCTIVE HOSE KIT 35 MM / 4 M | FT100508-UNIT | ✓                      |



FLEXTOOL DUST COLLECTOR COMPONENTS (FDC-1A2)

| Description                                                            | Product Code  | Included with FDC-1A2 |
|------------------------------------------------------------------------|---------------|-----------------------|
| 1 FLEXTOOL DUST COLLECTOR HOSE 50 MM / 7.5 M                           | FT100464-UNIT | ✓                     |
| 2 FLEXTOOL DUST COLLECTOR ALUMINIUM WAND 50 MM                         | FT100465-UNIT | ✓                     |
| 3 FLEXTOOL DUST COLLECTOR FLOOR NOZZLE 50 MM                           | FT100466-UNIT | ✓                     |
| 4 FLEXTOOL DUST COLLECTOR REDUCER 75 MM / 50 MM                        | FT101803-UNIT | ✓                     |
| 5 FLEXTOOL DUST COLLECTOR HOSE CUFF 50 MM                              | FT100471-UNIT | ✓                     |
| 6 FLEXTOOL DUST COLLECTOR BAGGING SYSTEM 4-PACK                        | FT100467-UNIT | ✓*                    |
| 7 FLEXTOOL DUST COLLECTOR HEPA FILTER H13 (USED ON FDC-1M AND FDC-1A2) | FT100469-UNIT | ✓                     |
| 8 FLEXTOOL DUST COLLECTOR HEPA FILTER H11 (USED ON FDC-1A2)            | FT100470-UNIT | ✓                     |
| 9 FLEXTOOL DUST COLLECTOR HEPA FILTER CONICAL (USED ON FDC-1M)         | FT100468-UNIT | ✓                     |



\* Single pack included with purchase.

Flextool Scarifier

The Flextool Scarifier FSP-200 is designed for use on all concrete and asphalt surfaces. With a 200 mm scarifying path, Honda GX160 4-stroke engine and rigid, heavy-weighted chassis design, this machine is engineered around durability and efficiency. The Flextool Scarifier FSP-200 comes with a tungsten carbide tip cutter cage.

This product is eligible for the Flextool Promise.



| Model   | Working Width (mm) | Operating Weight (kg) | Dust Outlet (mm) | Engine Make | Engine Model | Max Rated Power (hp) | Fuel Type | Product Code  |
|---------|--------------------|-----------------------|------------------|-------------|--------------|----------------------|-----------|---------------|
| FSP-200 | 200                | 87.5                  | 50               | Honda       | GX160        | 5.5                  | P         | FT101802-UNIT |

CUTTER CAGE (Included with Flextool Scarifier FSP-200)

| Description                                                    | Product Code  |
|----------------------------------------------------------------|---------------|
| Flextool Scarifier Cage - Tungsten Carbide Tip (Suits FSP-200) | FT101800-UNIT |







## FROM SITE PREP TO SURFACE PREP, FLEXTOOL HAS THE RIGHT EQUIPMENT FOR THE JOB.

### SITE PREPARATION



### CONCRETE PLACING



### CONCRETE FINISHING



### CONCRETE CUTTING



### SURFACE PREPARATION





# Flextool®

## THE HOME OF LEADING BRANDS

**Flextool®**

**Mikasa** 

**SMITH**  
PERFORMANCE SPRAYERS

**MQ WHITEMAN**

**W. Rose**  
SINCE 1798

**K**  
**KRAFT TOOL CO.**  
USA

Flextool, PortaVibe, Flextool Profinish, PortaScreed, PortaPac, PortaTrowel, PortaGrind, PowerVibe, BladeTec and TuffTruk are registered trade marks of Parchem Construction Supplies Pty Ltd.

Mikasa is a registered trade mark of Mikasa Sangyo Co. Ltd, used under licence. Multiquip, MQ and Whiteman are registered trade marks and QuickPitch and TwinPitch are trade marks of Multiquip Inc. Smith Performance Sprayers is a trade mark. Kraft Tool Co. and W.Rose are trade marks.

Honda and the Powered by Honda logo are trade marks of Honda Motor Co., Ltd. Yanmar and the Yanmar logo are trade marks of Yanmar Co., Ltd. Vanguard is trade mark of Briggs & Stratton Corporation. Hatz Diesel is trade mark of Motorenfabrik Hatz GmbH & Co. KG.

© This publication is copyright. All rights are reserved. Reproduction in whole or in part is prohibited without written permission. Application details are provided as a suggestion only of intended use. This catalogue is produced as a guide to the product range. Some items may not be available at all outlets. Owing to a continual product improvement, designs & specifications may be subject to change without notice.

**Flextool | DuluxGroup Australia**

1956 Dandenong Rd, Clayton VIC 3168  
ABN 80 069 961 968



**1300 353 986**  
**flextool.com.au**