

FLEXTOOL SCARIFIER FSP-200

The Flextool Scarifier FSP-200 is designed for use on all concrete and asphalt surfaces. With a 200mm scarifying path, Honda GX160 4-stroke engine and rigid, heavy-weighted chassis design, this machine is engineered around durability and efficiency. The Flextool Scarifier FSP-200 comes with a tungsten carbide tip cutter cage.

Fine pitch height adjustment

For quick and responsive depth control

Lifting hook

For easy and safe onsite handling

Honda GX160 engine

Provides hassle free operation and low engine emissions

Rigid heavy-weighted chassis


Provides stability and smooth movement during operation

Heavy-duty drive shaft components

Hexagonal drive shaft and quality sealed bearings for longer service life

Dust outlet

For connection with vacuum system for complete suppression of dust

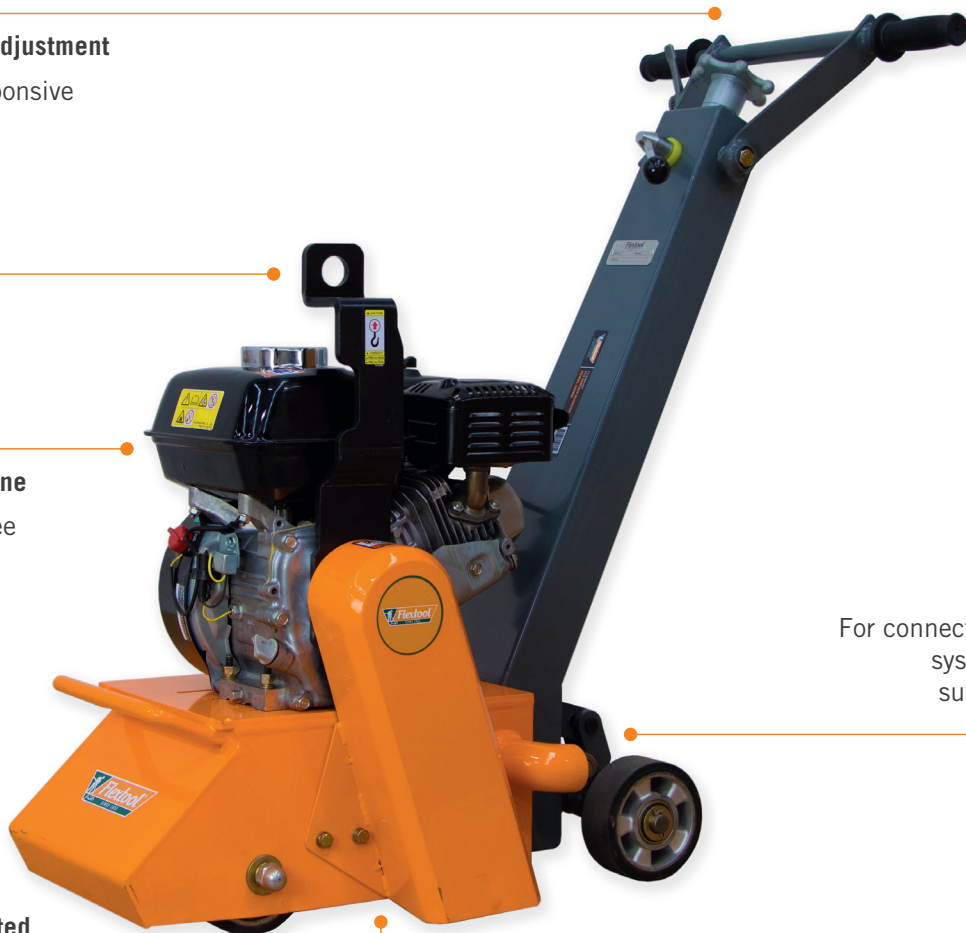


POWERED by
HONDA

FLEXTOOL SCARIFIERS




FSP-200

Model	Working Width (mm)	Operating Weight (kg)	Dust Outlet (mm)	Engine Make	Engine Model	Max Rated Power (hp)	Fuel Type	Product Code
FSP-200	200	87.5	50	Honda	GX160	5.5		FT101802-UNIT

CUTTER CAGE (Included with Flextool Scarifier FSP-200)

Product Code	Description
FT101800-UNIT	Flextool Scarifier Cage - Tungsten Carbide Tip (Suits FSP-200)



THE FLEXTOOL PROMISE

If the unexpected happens and something goes wrong with your Flextool equipment within the first 12 months of purchase, we'll arrange to give you a loan machine for 2 days, free of charge, while we work to repair or replace your Flextool product.*

flextool.com.au/flextool-promise

*Qualification criteria apply. Terms and conditions for the Flextool Promise can be found at flextool.com.au.

This Technical Data Sheet (TDS) summarises our best knowledge of the product, based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use of the product whether or not in accordance with any advice, specification, recommendation or information given by it.