

MQ WHITEMAN RIDE-ON POWER TROWEL HHNG5 (MECHANICAL DRIVE)

The MQ Whiteman Ride-On Power Trowels (Mechanical Drive) are available in twin 36" and 46" models. Incorporating TwinPitch™ control, CVT drive system, durable gearboxes and constant-velocity joints, this quality HHNG5 is designed to tackle a wide range of jobsite requirements and floor sizes.

Mechanical steering

Spring assisted for precise control and reduced fatigue

B&S Vanguard 31 hp engine

High-performance to withstand the rigors of concrete finishing

Heavy-duty CVT drive system

Constantly adjusts drive ratios to maintain torque and speed during all phases of trowelling

LED lighting

For night-time and indoor work

Mechanical gearboxes

Helical design for coolest running*, trouble-free and superior operation

Easy access frame design

Simplifies maintenance and offers convenient access to all serviceable components

Heavy-duty spider plates

Features long-lasting wear plates and hubs that can be economically rebuilt



* Compared to worm drive gearboxes

PRODUCT & PERFORMANCE SPECIFICATIONS



MQ WHITEMAN RIDE-ON POWER TROWELS (MECHANICAL DRIVE)



JWN24HTCSL



HHNG5




HHXDF5

Model	Trowel Rotor Diameter (mm) (in)	Path Width (mm) (in)	Operating Weight (kg)	Blades Per Rotor	Steering Type	Speed Range (rpm)	Blade Pitch Max (deg)	Fuel Tank Capacity (L)	Wheel Kit Option	Engine Make	Engine Model	Max Rated Power (hp)	Fuel Type	Product Code
JWN24HTCSL	915 (36)	1905 (75)	355	4	Spring Assisted Mechanical	40-180	30	19	EMR2	Honda	GX690	24	P	FT269011-UNIT
HHNG5	1168 (46)	2335 (92)	490	5	Spring Assisted Mechanical	0-180	30	26	EMR2 or EMR3	B&S Vanguard	540000	31	P	FT269012-UNIT
HHXDF5	1168 (46)	2335 (92)	735	5	Proportional Hydraulic	0-170	30	37.85	EMR2 or EMR3	Kubota	WG972	31	P / LPG	FT269014-UNIT

WHEEL KIT OPTIONS

Model	Product Description	Product Code
EMR2	Ride-on power trowel wheel transport kit EMR2	FT269018-UNIT
EMR3	Ride-on power trowel wheel transport kit EMR3	FT269019-UNIT

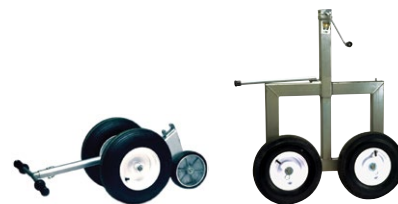

EMR2

EMR3

TROWEL BLADES AND PAN FLOATS

Model	Combination Blade	Finishing Blade	Reversible Combination Wide Finishing Blade	Pan Float - Flat	Pan Float - Super Flat
JWN24HTCSL	FT269023-UNIT	FT269027-UNIT	FT269024-UNIT	FT269032-UNIT	FT269033-UNIT
HHNG5	FT269025-UNIT	FT269028-UNIT	FT269026-UNIT	FT269035-UNIT	FT269036-UNIT
HHXDF5	FT269025-UNIT	FT269028-UNIT	FT269026-UNIT	FT269035-UNIT	FT269036-UNIT

For further information and specifications please refer to the MQ Whiteman Trowel Blades and Pan Floats Technical Data Sheet.

MQ Whiteman products are only available through authorised dealers in Australia. [Click here](#) to find your nearest authorised dealer.

EXCLUSIVE TO



This Technical Data Sheet (TDS) summarises our best knowledge of the product, based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use of the product whether or not in accordance with any advice, specification, recommendation or information given by it.

© This publication is copyright. All rights are reserved. Flextool is a registered trade mark of Parchem Construction Supplies Pty Ltd. Multiquip, MQ and Whiteman are registered trade marks and TwinPitch is a trade mark of Multiquip Inc.

PRODUCT & PERFORMANCE SPECIFICATIONS



WHICH RIDER SUITS YOUR NEEDS BEST?



	JWN24 Mechanical Operating Weight: 355 kg Rotor rpm: 40-180	HHNG5 Mechanical Operating Weight: 490 kg Rotor rpm: 0-180	LD60 Hydrostatic Operating Weight: 386 kg Rotor rpm: 0-140	MD80 Hydrostatic Operating Weight: 690 kg Rotor rpm: 0-160	MD82 Hydrostatic Operating Weight: 809 kg Rotor rpm: 0-180	MD105 Hydrostatic Operating Weight: 835 kg Rotor rpm: 0-140	HTX6H Hydrostatic Operating Weight: 1020 kg Rotor rpm: 0-160	STX6H Hydrostatic Operating Weight: 1135 kg Rotor rpm: 0-130
Feature								
Manoeuvrability	● ●	● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●
Panning – Early Entry	●	●	● ● ●	● ● ●	● ●	● ● ●	●	●
Panning – Tight/Black	●	●	● ●	● ●	● ● ●	● ●	● ● ●	● ● ●
Blades – Combination	● ● ●	● ● ●	● ● ●	● ● ●	● ● ●	● ●	● ● ●	● ●
Blades – Finish/Burn	● ● ●	● ● ●	●	● ●	● ● ●	● ●	● ● ●	● ●
Serviceability	● ●	● ●	● ● ●	● ● ●	● ● ●	● ● ●	●	●

Key to understanding the comparison:

- (1 dot): **Good** – Suitable for basic performance and standard jobsite applications.
- ● (2 dots): **Great** – Designed for medium-duty applications with increased performance and productivity.
- ● ● (3 dots): **Best** – Built for heavy-duty application where maximum performance and durability are critical.

MQ Whiteman products are only available through authorised dealers in Australia. [Click here](#) to find your nearest authorised dealer.



This Technical Data Sheet (TDS) summarises our best knowledge of the product, based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use of the product whether or not in accordance with any advice, specification, recommendation or information given by it.

© This publication is copyright. All rights are reserved. Flextool is a registered trade mark of Parchem Construction Supplies Pty Ltd. Multiquip, MQ and Whiteman are registered trade marks and SmartPitch is a trade mark of Multiquip Inc.